

39

TECHNICAL MANUAL

**ORGANIZATIONAL, DIRECT SUPPORT AND
GENERAL SUPPORT MAINTENANCE REPAIR PARTS
AND SPECIAL TOOLS LIST
(INCLUDING DEPOT MAINTENANCE REPAIR PARTS
AND SPECIAL TOOLS)**

FOR

**AIR CONDITIONER, COMPACT, VERTICAL
36,000 BTU/HR COOLING
28,600 BTU/HR HEATING
208 VOLT, 3 PHASE, 400 HERTZ
KECO MODEL F36T4-2
NSN 4120-01-072-6388**

RETURN TO GOV. DOCS. OFFICE

**Organizational, Direct Support and General Support
Maintenance Repair Parts and Special Tools List
(Including Depot Maintenance Repair
Parts and Special Tools)**

for

**AIR CONDITIONER, COMPACT, VERTICAL
36,000 BTU/HR COOLING
28,600 BTU/HR HEATING
208 VOLT, 3 PHASE, 400 HERTZ
KECO MODEL F36T4-2
NSN 4120-01-072-6388**

CURRENT AS OF 20 AUGUST 1981

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this manual. If you find any mistake or if you know of a way to improve the procedures, please let us know. Mail your letter, DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028-2 located in the back of this manual direct to: Commander, U.S. Army Troop Support and Aviation Materiel Readiness Command, ATTN: DRSTS-MPSD, 4300 Goodfellow Blvd., St. Louis, MO 63120. A reply will be furnished directly to you.

	Page	Illus Figure
SECTION I. INTRODUCTION	1	
II. REPAIR PARTS LIST	7	
Group 01 CASING COVERS, PANELS, GRILLES, SCREENS, AND INFORMATION PLATES		
Top and Lower Front Panels	6	1
Front Grilles and Gaskets	10	2
Rear Grilles, Dampers and Panels	12	3
Rear Screens, Guards and Plates	16	4
02 AIR CIRCULATING AND CONDENSATE DRAIN SYSTEM		
Filter, Mist Eliminator and Condensate Trap	18	5
03 ELECTRICAL		
Control Panel Assembly	20	6
Block-Off Panel Assembly	24	7
Junction Box, External Components and Wiring Harness	26	8

Group 04	EVAPORATOR FAN MOTOR AND HEATERS		
	Evaporator Fans, Motor and Related Parts	42	13
	Heaters and Related Parts	44	14
05	CONDENSER FAN MOTOR AND BACK PANEL ASSEMBLY		
	Condenser Fan Motor and Back Panel Assembly	46	15
06	REFRIGERATION SYSTEM		
	High and Low Pressure Switch Assembly	48	16
	Evaporator Coil and Related Piping	50	17
	Condenser Coil and Related Piping	54	18
	Compressor and Related Piping	56	19
07	CASING AND BASE		
	Casing Subassembly and Base	60	20
III.	SPECIAL TOOLS LIST (Not applicable)		
IV.	NATIONAL STOCK NUMBER - PART NUMBER INDEX	65	

tioner. It authorizes the requisitioning of spares and repair parts as indicated by the source and maintenance codes.

1. This Repair Parts and Special Tools List is divided into the following sections:

Section II. Repair Parts List. A list of spares and repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of damaged or worn parts. Parts lists are composed of several groups in numeric sequence, with the parts in each group listed in figure and item sequence. Bulk materials are listed in a separate section.

Section III. Special Tools List. A list of tools, special TMDE, and other special equipment authorized for the performance of maintenance. (Not applicable.)

Section IV. National Stock Number and Part Number Index. A list, in National Item Identification Number (NIIN) sequence, of all National Stock Numbers (NSN) appearing in the listings, followed by a list in alphanumeric sequence of all part numbers appearing in the listings. National Stock Numbers and part numbers are cross-indexed to each illustration figure and item sequence. This index is followed by a separate list of reference designators to the corresponding item numbers.

Explanation of Columns.

Figure Number. This column is divided as follows:

Figure Number. Indicates the figure number of the illustration on which the item is located.

Item Number. The number used to identify the item located in the illustration.

Source Code, Maintenance and Recoverability Codes.

Source Code. Source codes indicate the method of acquiring support items for

anticipated or known usage.

PB Item procured and stocked for insurance purposes because essentiality dictates that a minimum quantity be available in the supply system.

PC Item procured and stocked and which otherwise would be coded PA except that it is deteriorative in nature.

PD Support item, excluding support equipment, procured for initial issue or outfitting and stocked only for subsequent or additional initial issues or outfittings. Not subject to automatic replenishment.

PE Support equipment procured and stocked for initial issue or outfitting to specified maintenance repair activities.

PF Support equipment which will not be stocked but which will be centrally procured on demand.

PG Item procured and stocked to provide for sustained support for the life of the equipment. It is applied to an item peculiar to the equipment which, because of probable discontinuance or shutdown of production facilities, would prove uneconomical to reproduce at a later time.

KD An item of a depot overhaul/repair kit and not purchased separately. Depot kit defined as a kit that provides items required at the time of overhaul or repair.

KF An item of a maintenance kit and not purchased separately. Maintenance kit defined as a kit that provides an item that can be replaced at organizational or intermediate levels of maintenance.

KB Item included in both a depot overhaul/repair kit and a maintenance kit.

MO Item to be manufactured or fabricated at the organizational level.

MD	Item to be manufactured or fabricated at the depot maintenance level.
AO	Item to be assembled at organizational level.
AF	Item to be assembled at the direct support maintenance level.
AH	Item to be assembled at general support maintenance level.
AD	Item to be assembled at depot maintenance level.
XA	Item is not procured or stocked because the requirements for the item will result in the replacement of the next higher assembly.
XB	Item is not procured or stocked. If not available through salvage, requisition.
XC	Installation drawing, diagram, instruction sheet, field service drawing, that is identified by manufacturer's part number.
XD	A support item that is not stocked. When required, item will be procured through normal supply channels.

NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA and aircraft support items as restricted by AR 700-42.

(2) **Maintenance Code.** Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

(a) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace and use the support item. The maintenance code entered in the fourth position will indicate one of the following levels of maintenance:

F	Support item is removed, replaced, at the organizational level.
H	Support item is removed, replaced, at the general support level.
D	Support items that are removed, replaced, used at depot, mobile depot, specialized repair activity only.

(b) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

Code	Application/Explanation
O	The lowest maintenance level capable of complete repair of the support item at the organizational level.
F	The lowest maintenance level capable of complete repair of the support item at the direct support level.
H	The lowest maintenance level capable of complete repair of the support item at the general support level.
D	The lowest maintenance level capable of complete repair of the support item at the depot level.
L	Repair restricted to designated Specialized Repair Activity.
Z	Nonreparable. No repair is authorized.
B	No repair is authorized. The item may be reconditioned by adjusting, lubricating, etc., at the user level. No parts or special tools are procured for the maintenance of this item.

(3) **Recoverability Code.** Recoverability codes are assigned to support items to indicate disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

indicated in position 3.
reparable item. When uneconomically
reparable, condemn and dispose at
organizational level.

reparable item. When uneconomically
reparable, condemn and dispose at the
direct support level.

reparable item. When uneconomically
reparable, condemn and dispose at the
general support level.

reparable item. When beyond lower
level repair capability, return to depot.
condemnation and disposal not
authorized below depot level.

reparable item. Repair, condemnation,
and disposal not authorized below
depot/specialized repair activity level.

item requires special handling or con-
demnation procedures because of
specific reasons (i.e., precious metal con-
tent, high dollar value, critical material
or hazardous material). Refer to ap-
propriate manuals/directives for
specific instructions.

Stock Number. Indicates the Na-
tional Stock Number assigned to the item and
used for requisitioning.

Manufacturer's Number. Indicates the primary number
of the manufacturer which controls the
characteristics of the item by means of
drawing drawings, specifications, stan-
dard inspection requirements to identify an
item of items.

NOTE

*A stock numbered item is requisitioned
on the item received may have a dif-
ferent part number than the part being
requisitioned.*

FSCM Supply Code for Manufacturer.
The FSCM is a 5-digit numeric code listed
in the manual which is used to identify the manufac-
turer, or Government agency, etc.

Item Description. Indicates the Federal item name
and, where necessary, a minimum description to identify

the part to be used. The part to be used differs from serial numbers
of the same model, the effective serial numbers are
shown as the last line of the description. In the
Special Tools List, the initial basis of issue (BC)
appears as the last line in the entry for each special
tool, special TMDE, and other special support
equipment. When density of equipments sup-
ported exceeds density spread indicated in the
basis of issue, the total authorization is increased
accordingly.

g. Unit of Measure (U/M). Indicates the stan-
dard of the basic quantity of the listed item as used
in performing the actual maintenance function.
This measure is expressed by a two-character
alphabetical abbreviation (e.g., ea, in., pr, etc.).
When the unit of measure differs from the unit of
issue, the lowest unit of issue that will satisfy the
required units of measure will be requisitioned.

h. Quantity Incorporated in Unit. Indicates the
quantity of the item used in the breakout shown on
the illustration figure, which is prepared for a
functional group, subfunctional group, or a
complete assembly. A "V" appearing in this column in lieu
of a quantity indicates that no specific quantity
is applicable (e.g., shims, spacers, etc.).

4. Special Information.

a. Usable on codes are shown in the descriptive
column. Uncoded items are applicable to all
models.

b. Detailed manufacturing instructions for
items source coded to be manufactured or
fabricated are found in TM 5-4120-363-14. Bulk
materials required to manufacture items are listed
in the Bulk Material Group of this manual.

c. Detailed assembly instructions for items
source coded to be assembled are found in TM 5-
4120-363-14. Assembly components are listed im-
mediately following the item to be assembled.

d. Repair parts kits and gasket sets appear as
the last entries in the repair parts listing for the
figure in which its parts are listed as repair parts.

e. The following publication pertains to Model
F36T4-2 and its components:

Publication and Short Title

TM 5-4120-363-14, Maintenance Manual

Number is Unknown:

(1) *First.* Using the table of contents, determine the functional group within which the item belongs. This is necessary since illustrations are prepared for functional groups, and listings are divided into the same groups.

(2) *Second.* Find the illustration covering the functional group to which the item belongs.

(3) *Third.* Identify the item on the illustration and note the illustration figure and item number of item.

(4) *Fourth.* Using the Repair Parts Listing, find the figure and item number noted on the illustration.

When National Stock Number or Part Number is Known.


(1) *First.* Using the Index of National Stock Numbers and Part Numbers, find the pertinent National stock number or part number. This index is in NIIN sequence followed by a list of part numbers in alphabetic sequence, cross-referenced to the illustration figure number and item number.

(2) *Second.* After finding the figure and item number, locate the figure and item number in the repair parts list.


ASSY	Assembly(ies)
ALY	alloy
CBR	chemical, biological, radiological (warfare)
CNTFGL	centrifugal
CPLG	coupling
CTSK	countersunk
ELEC	electrical
EVAP	evaporator
FSTNR	fastener
HD	head
IND	indicator
LKG	locking
L	long
MFG	manufactured
MTD	mounted
MTG	mounting
PRESS	pressure
RCPT	receptacle
RFGT	refrigerant
RFI	radio-frequency interference
RND	round
SHLDR	shoulder
SYNTH	synthetic
THK	thick
UPR	upper

1	PAJZZ	5305-00-984-6194	96906	MS35206-246	SCREW, MACHINE.....
2	PAJZZ	5310-00-809-8544	96906	MS27183-7	WASHER, FLAT.....
3	PAJZZ	4130-01-095-2438	97403	13214E4007	COVER, ACCESS.....
4	MFFFF		97403	13217E6896-106	BARRIER MATERIAL, PAN & SIOES, 5.12 X 65, MFD FROM MIL-B-22191, TYPE III.....
5	MFFFF		97403	13217E6896-107	BARRIER MATERIAL BOTTOM, 1.75 X 34, MFD FROM MIL-B-22191, TYPE III.....
6	PAJZZ	5325-00-055-7451	83058	XX78328-20	STUD, TURNBUTON.....
7	PAJZZ	5305-00-984-6195	96906	MS35206-247	SCREW, MACHINE.....
8	PAJZZ	5310-00-809-8544	96906	MS27183-7	WASHER, FLAT.....
9	XBFFF		97403	13214E3917	PANEL, TOP ASSEMBLY.....
10	MFFFF		97403	13214E3917-3	.INSULATION SHEET, 0.50 THK X 11.88 X 28, MFD FROM MIL-I-14511
11	MFFFF		97403	13214E3917-2	.INSULATION SHEET, 5.25 X 8.88 X 0.50 THK, MFD FROM MIL-I-14511.....
12	MFFFF		97403	13214E3917-4	.INSULATION SHEET, 0.50 THK X 5.25 X 8.88, MFD FROM MIL-I-14511.....
13	MFFFF		97403	13214E3917-12	.INSULATION SHEET, 0.25 THK X 6 X 28, MFD FROM MIL-I-14511....
14	MFFFF		97403	13214E3917-10	.SEALING STRIP, .75 X 9.62 MFD FROM ASTM-D1056-SBE42CF2 2.2ST.....
15	MFFFF		97403	13214E3917-9	.SEALING STRIP, .25 THK X .75 X 17.81, MFD FROM ASTM-D1056-SBE42CF2.....
16	MFFFF		97403	13214E3917-11	.SEALING STRIP, .25 THK X .75 X 9.25, MFD FROM ASTM-D1056-SBE42CF2.....
17	PAFZZ	5320-00-117-6539	96906	MS20426A03-5	.RIVET, SOLID.....
18	PAFZZ	5310-00-623-5991	80205	NAS1031A08	.NUT, SELF-LOCKING, PL.....
19	PAFZZ	5310-00-623-5989	80205	NAS1031A3	.NUT, SELF-LOCKING, PL.....
20	XBZZZ		97403	13214E3917-1	.PANEL, TOP.....
21	PAFZZ	5320-00-932-1972	97403	13214E3789-2	RIVET, BLIND.....
22	XBZZZ		97403	13214E4328	PLATE, INFORMATION.....
23	XBZZZ		97403	13214E4129	BAFFLE, CIRCUIT BREAKER ACCESS.....
24	XBZZZ		97403	13214E6499-7	.STUD ASSEMBLY.....
25	XBZZZ		97403	13211E3364	.RING RETAINING.....
26	XBZZZ		97403	13211E3363	.EYELET, METALLIC.....
27	MFFFF		97403	13214E4129-5	.INSULATION.....
28	XBZZZ		97403	13214E4129-1	.BAFFLE.....
29	XBFFF		97403	13214E3997	PANEL, LOWER.....
30	PAFZZ	5305-00-984-7441	94222	12-11-613-12	.SCREW, PANEL FSTNR.....
31	PAFZZ		97403	13214E3744-M4	.SCREW, PANEL FSTNR.....
32	PAFZZ		97403	13225E8181	.WASHER OVERSIZED.....
33	PAFZZ	5310-00-880-9344	94222	12-11014-12	.WASHER, LOCK.....
34	PAFZZ	5320-00-882-8388	97707	AD43H	.RIVET, BLIND.....

1	36	MFFFF		97403	13214E3997-22	.GASKET,ROUND,.25 THK X 5.50 ID X 8.00 OD,MFD FROM P/N ASTM-D1056-SBE42CF2.....
1	37	PAFZZ	5320-00-932-1972	97403	13214E3789-2	.RIVET,BLIND.....
1	38	XBFZZ		97403	13214E4266	.PLATE,INFORMATION.....
1	39	PAFZZ	5320-00-882-8388	07707	AD43H	.RIVET,BLIND.....
1	40	XBFZZ		97403	13214E3997-3	.STRIP,RETAINING.....
1	41	PAFZZ	5320-00-882-8388	07707	AD43H	.RIVET,BLIND.....
1	42	XBFZZ		97403	13214E3997-18	.STRIP,RETAINING.....
1	43	PAFZZ	5320-00-882-8388	07707	AD43H	.RIVET,BLIND.....
1	44	XBFZZ		97403	13214E3997-4	.ZEE BAR.....
1	45	PAFZZ	5320-00-882-8388	07707	AD43H	.RIVET,BLIND.....
1	46	XBFZZ		97403	13214E3997-17	.ZEE BAR.....
1	47	PAFZZ	5310-01-095-6390	97403	13214E3994	.WASHER,FLAT.....
1	48	XBFZZ		97403	13214E3997-6R	.INSULATION.....
1	49	XBFZZ		97403	13214E3997-6L	.INSULATION.....
1	50	PAFZZ	5320-00-932-1972	97403	13214E3789-2	.RIVET,BLIND.....
1	51	XBFZZ		97403	13214E3996	.CLIP,INSULATION.....
1	52	PAFZZ	5320-00-117-6950	96906	MS20426AD4-5	.RIVET,SOLID.....
1	53	PAFZZ	5325-00-290-3976	07652	244-16C	.RECEPTACLE TURNLOCK.....
1	54	MFFFF		97403	13214E3997-23	.SEALING STRIP,.125 THK X .38 X 26.62 L,MFD FROM P/N ASTM-D1056-SBE42CF2.....
1	55	MFFFF		97403	13214E3997-5V	.SEALING STRIP,.25 THK X .31 X 2.50 L,MFD FROM P/N ASTM-D1056-SBE42CF2.....
1	56	MFFFF		97403	13214E3997-5H	.SEALING STRIP,.25 THK X .31 X 7.25 L,MFD FROM P/N ASTM-D1056-SBE42CF2.....
1	57	MFFFF		97403	13214E3997-19	.SEALING STRIP,.25 THK X .19 X 2.75 L,MFD FROM P/N ASTM-D1056-SBE42CF2.....
1	58	MFFFF		97403	13214E3997-20	.SEALING STRIP,.25 THK X .19 X 2.00 L,MFD FROM P/N ASTM-D1056-SBE42CF2.....
1	59	MFFFF		97403	13214E3997-21	.SEALING STRIP,.25 THK X 1.19 X 2.17 L,MFD FROM P/N ASTM-D1056-SBE42CF2.....
1	60	XBFZZ		97403	13214E3997-1	.PANEL,LOWER.....
1	61	PAOZZ	5305-00-889-3000	96906	MS35206-230	.SCREW,MACHINE.....
1	62	PAOZZ	5310-00-889-2544	96906	MS21045-06	.NUT,SELF-LOCKING.....
1	63	XBOZZ		97403	13214E3471-3	.COVER,BLANK CONNECTOR.....
1	64	PAFZZ	5320-00-932-1972	97403	13214E3789-2	.RIVET,BLIND.....
1	65	XBFZZ		97403	13217B5404	.PLATE,INFORMATION.....

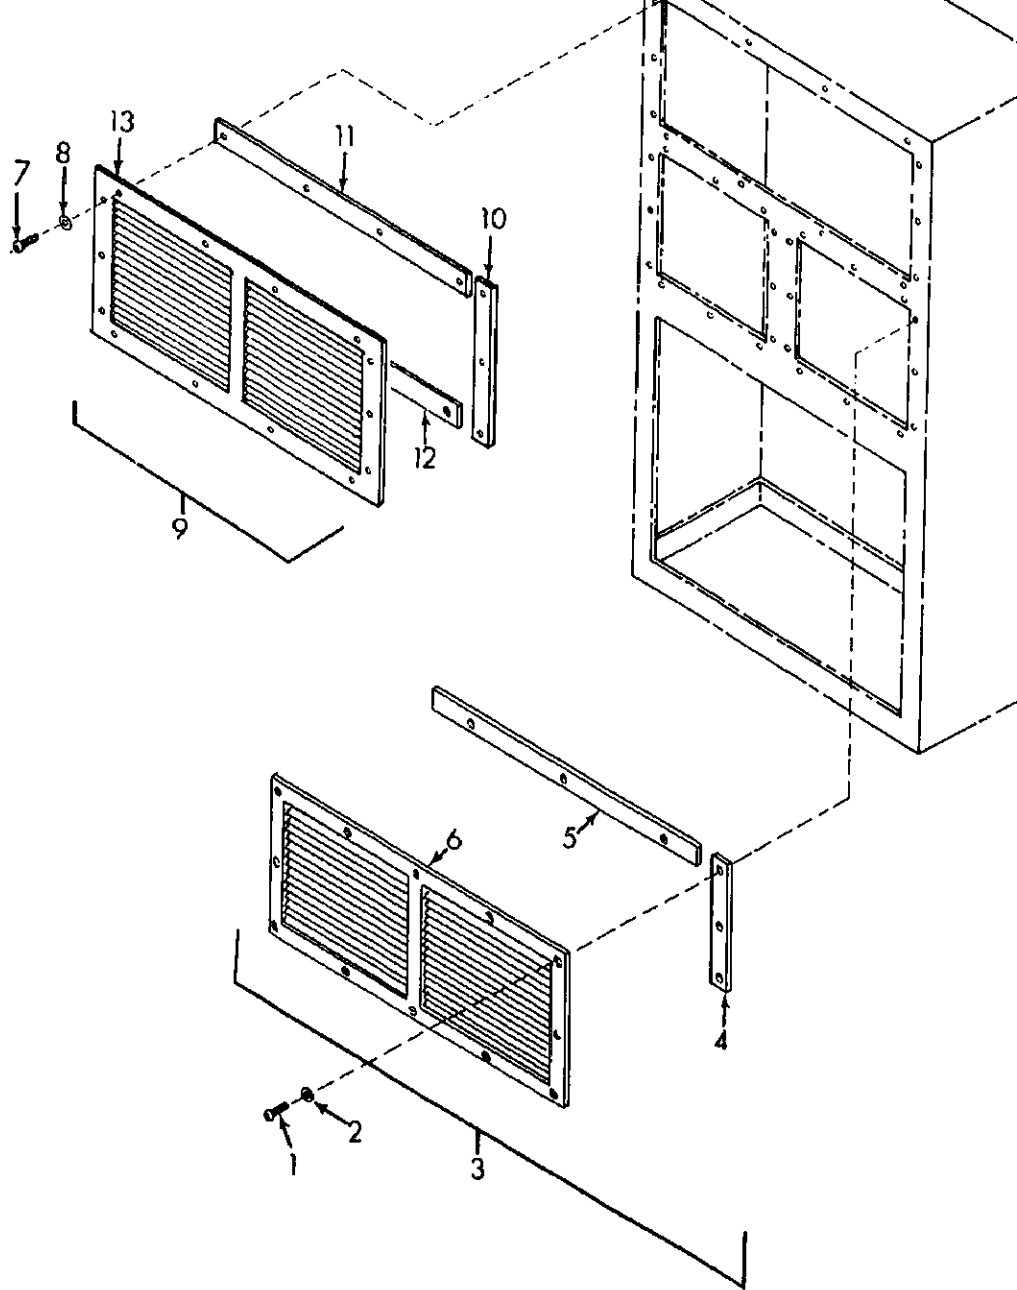

2	PAJ77	5310-00-809-8544	96906	MS27183-7	WASHER, FLAT
3	XBJFF		97403	13214E3937	GRILLE, METAL ASSY.....
4	MFFFF		97403	13214E3937-3	.SEALING STRIP, .125 THK X .75 X 9.00 L, MFD FROM ASTM-D1056-SBE42CF2.....
5	MFFFF		97403	13214E3937-2	.SEALING STRIP, .125 THK X .62 X 28.00 L, MFD FROM ASTM-D1056-SBE42CF2.....
6	XBJZZ		97403	13214E3936	.GRILLE, METAL.....
7	PAJZZ	5305-00-984-6155	96906	MS39206-247	SCREW, MACHINE.....
8	PAJZZ	5310-00-809-8544	96906	MS27183-7	WASHER, FLAT
9	XBJFF		97403	13214E3931	GRILLE, METAL ASSY.....
10	MFFFA		97403	13214E3931-2	.SEALING STRIP, .125 THK X .75 X 13.88 L, MFD FROM ASTM-D1056-SBE42CF2.....
11	MFFFF		97403	13214E3931-3	.SEALING STRIP, .125 THK X .75 X 28.00 L, MFD FROM ASTM-D1056-SBE42CF2
12	MFFFF		97403	13214E3931-4	.SEALING STRIP, .125 THK X .75 X 28.00 L, MFD FROM ASTM-D1056-SBE42CF2
13	XBJZZ		97403	13214E3929	.GRILLE, METAL

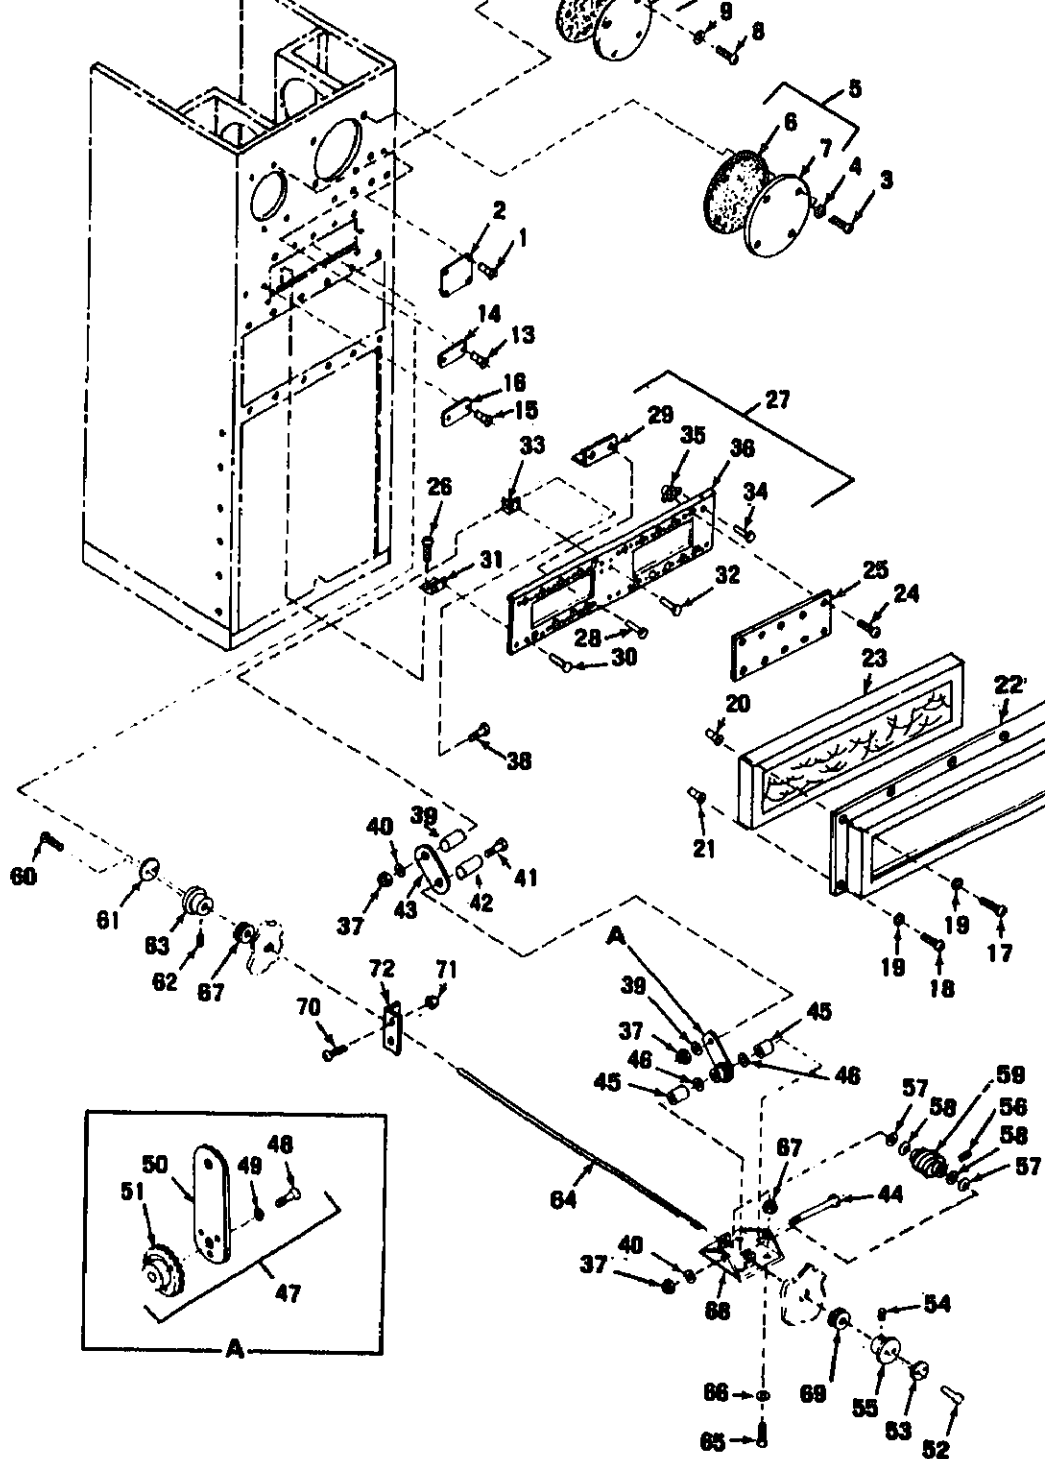

3	3	PAJZZ	5305-00-984-6194	96906	MS35206-246	SCREW,MACHINE.....
3	4	PAJZZ	5310-00-809-8544	96906	MS27183-7	WASHER,FLAT.....
3	5	XBJFF		97403	13214E3864-2	COVER,FAN MOTOR ACCBBB.....
3	6	MFFFF		97403	13214E3864-2-2	.INSULATION,.25 THK X 7.00 X 7.00,MFD FROM MIL-I-14511...
3	7	XBFZZ		97403	13214E3864-2-1	.COVER.....
3	8	PAJZZ	5305-00-984-6194	96906	MS35206-246	SCREW,MACHINE.....
3	9	PAJZZ	5310-00-809-8544	96906	MS27183-7	WASHER,FLAT.....
3	10	XBJFF		97403	13214E3864-1	COVER,CBR.....
3	11	MFFFF		97403	13214E3864-1-2	.INSULATION,.25 THK X 5.50 X 5.50,MFD FROM MIL-I-14511...
3	12	XBFZZ		97403	13214E3864-1-1	.COVER.....
3	13	PAFZZ	5320-00-932-1572	97403	13214E3789-2	RIVET,BLIND.....
3	14	XBFZZ		97403	13214E3957	PLATE,INFORMATION.....
3	15	PAFZZ	5320-00-932-1572	97403	13214E3789-2	RIVET,BLIND.....
3	16	XBFZZ		97403	13216E4524	PLATE,MOISTURE INDICATOR.....
3	17	PAJZZ	5305-00-984-6211	96906	MS35206-264	SCREW,MACHINE.....
3	18	PAJZZ	5305-00-984-6210	96906	MS35206-263	SCREW,MACHINE.....
3	19	PAJZZ	5310-00-045-3296	96906	MS35338-43	WASHER,LOCK.....
3	20	PAJZZ	5310-01-064-3615	80205	NAS1329H3K180	NUT,PLAIN,BLIND RIV.....
3	21	PAJZZ	5310-01-058-3352	80205	NAS1329H3K80	NUT,PLAIN,BLIND RIV.....
3	22	XBJZZ		97403	13214E3908	FRAME,FILTER.....
3	23	PAJZZ	4130-00-193-8488	35338	A31547-1	FILTER ELEMENT,AIR.....
3	24	PAJZZ	5305-00-989-7434	96906	MS35207-263	SCREW,MACHINE.....
3	25	XBJZZ		97403	13214E3874	COVER.....
3	26	PAJZZ	5305-00-984-6194	96906	MS35206-246	SCREW,MACHINE.....
3	27	XBJFF		97403	13214E3942	PANEL,ASSY DAMPER.....
3	28	PAJZZ	5320-00-957-1422	96906	MS20605A06W4	.RIVET,BLIND.....
3	29	XBJZZ		97403	13216E4530	.HINGE.....
3	30	PAJZZ	5320-00-957-1422	96906	MS20605A06W4	.RIVET,BLIND.....
3	31	XBJZZ		97403	13216E4510	.HINGE,SPRING LOADED.....
3	32	PAJZZ	5320-00-117-6952	96906	MS20426A04-7	.RIVET,SQ ID.....
3	33	XBJZZ		97403	13214E3942-2	.BRACKET,DAMPER.....
3	34	PAJZZ	5320-00-117-6939	96906	MS20426A03-5	.RIVET,SQ ID.....
3	35	PAJZZ	5310-00-623-5989	80205	NAS1031A3	.NUT,SELF-LOCKING PLATE.....
3	36	XBJZZ		97403	13214E3942-1	.PANEL,DAMPER.....
3	37	PAJZZ	5310-00-061-7325	96906	MS21045-4	NUT,SELF-LOCKING.....
3	38	PAJZZ	5306-00-488-3826	80205	NAS1297-4-4	BOLT,SHOULDER.....
3	39	PAJZZ		97403	13225E8559-1	BUSHING.....

40	PAJZZ	5310-00-809-4058	96906	MS27183-10	WASHER, FLAT.....	
3	41	PAOZZ	5306-00-194-3595	80205	NAS1297-4-6	BOLT, SHOULDER.....
3	42	PAJZZ		96906	MS90726-7	SCREW CAP.....
3	43	XBZZ		97403	13216E4529	ARM, DAMPER LINKAGE.....
3	44	PAOZZ	5305-00-267-8985	96906	MS90726-18	SCREW, CAP, HEXAGON.....
3	45	XBZZ		97403	13216E4503	SPACER, DAMPER LINKAGE.....
3	46	XBZZ		97403	13216E4505	WASHER, SPRING.....
3	47	XBZZ		97403	13216E4531	ARM ASSEMBLY, DAMPER.....
3	48	PAJZZ	5305-00-063-3503	96906	MS24693550	SCREW, MACH, FLAT.....
3	49	PAOZZ	5310-00-685-6E55	96906	MS35790-9	WASHER, LOCK.....
3	50	XBZZ		97403	13216E8040	ARM, DAMPER.....
3	51	XBZZ		97403	13216E4506	GEAR, WORM WHEEL.....
3	52	PAJZZ	5305-00-175-3230	96906	MS21318-14	SCREW, DRIVE.....
3	53	XBZZ		97403	13214E3956	PLATE, INFORMATION.....
3	54	PAJZZ	5305-00-724-6799	96906	MS51964-51	SETSCREW CUP POINT.....
3	55	XBZZ		97403	13214E3889	KNOB, DAMPER.....
3	56	PAJZZ	5315-00-663-2329	96906	MS171499	PIN, SPRING.....
3	57	PAJZZ			STYLE-3-3502-18-365	WASHER, SPRING.....
3	58	PAOZZ	5310-00-081-4219	96906	MS27183-12	WASHER, FLAT.....
3	59	XBZZ		97403	13216E4504	GEAR, WORM.....
3	60	PAOZZ	5305-00-175-3230	96906	MS21318-14	SCREW, DRIVE.....
3	61	XBZZ		97403	13214E3954	PLATE INFORMATION.....
3	62	PAJZZ	5305-00-724-6759	96906	MS51964-51	SETSCREW CUP POINT.....
3	64	XBZZ		97403	13214E3868	ROD, DAMPER.....
3	65	PAJZZ	5305-00-989-7435	96906	MS35207-264	SCREW, MACHINE.....
3	66	PAJZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT.....
3	67	PAJZZ	5310-00-061-7326	96906	MS21045-3	NUT, SELF-LOCKING.....
3	68	XBZZ		97403	13216E4508	BRACKET, GEAR MTG.....
3	69	XBZZ		97403	13214E4276-1	GROMMET, RUBBER.....
3	70	PAJZZ	5305-00-989-7435	96906	MS35207-264	SCREW, MACHINE.....
3	71	PAJZZ	5310-00-061-7326	96906	MS21045-3	NUT, SELF-LOCKING.....
3	72	XBZZ		97403	13214E3877	ANGLE, DAMPER ROD SUPPORT.....


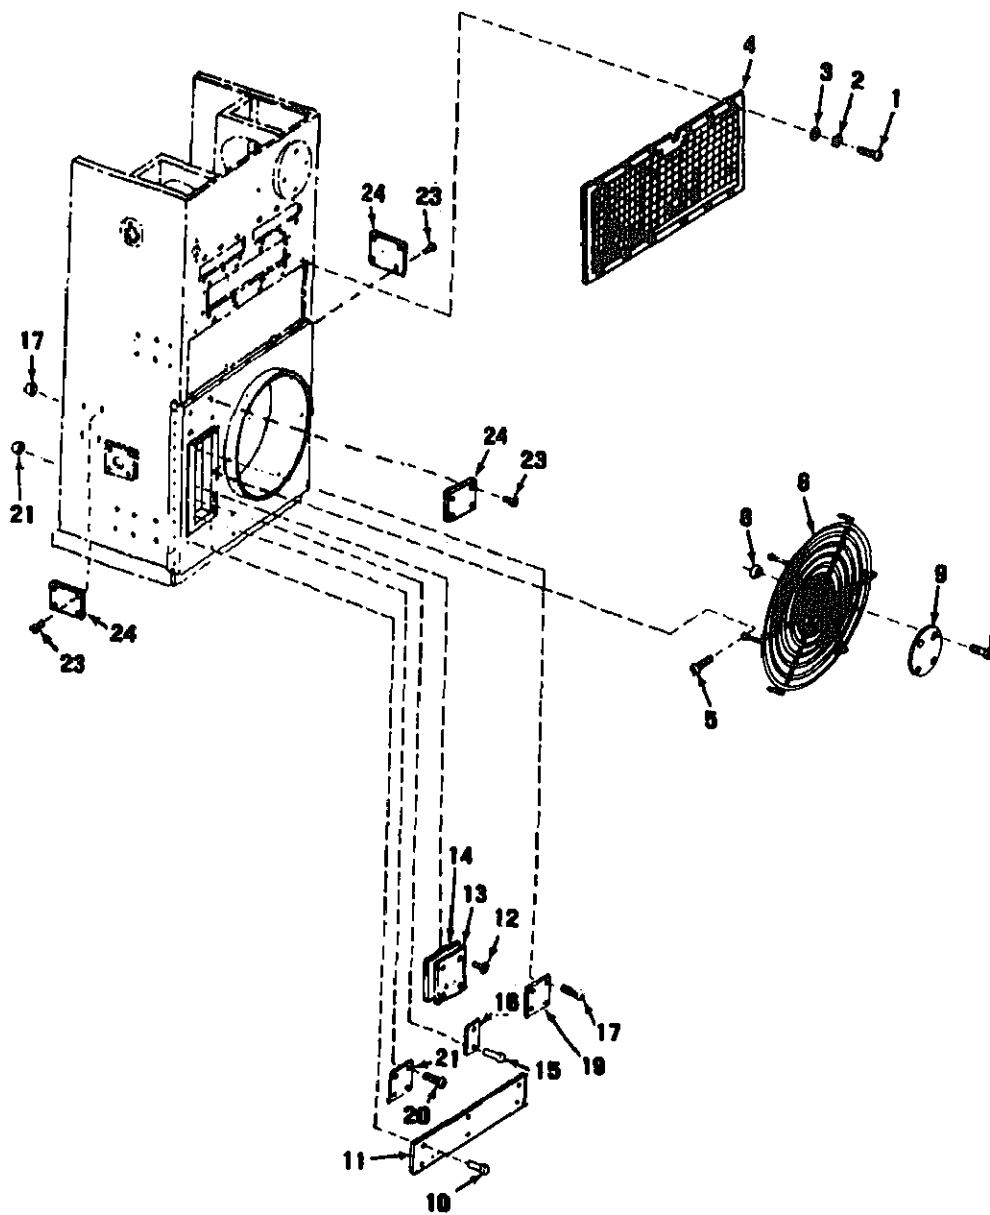


Figure 4. Rear Screens, Guards and Plates

2	PAQIZ	5310-00-049-3299	96906	MS35338-42
3	PAQIZ	5310-00-809-8544	96906	MS27183-7
4	XBJIZ		97403	13214E3934
5	PAQIZ	5305-00-984-6194	96906	MS35206-246
6	XBJIZ		97403	13214E3952-1
7	PAJIZ	5320-00-932-1672	97403	13214E3789-2
8	XBJIZ	5310-01-095-5728	97403	13214E3968
9	XBJIZ		97403	13214E3958
10	PAFIZ	5320-00-882-8388	07707	A043H
11	XBFIZ		97403	13214E4328
12	PAFIZ	5320-00-882-8388	07707	A043H
13	XBFIZ		97403	13214E4087
14	PAFIZ	5320-00-932-1672	97403	13214E3789-2
15	XBFIZ	9905-01-055-0219	97403	13217E6814
16	PAJIZ	5305-00-889-3000	96906	MS35206-230
17	PAJIZ	5310-00-889-2544	96906	MS21045-06
18	XBJIZ		97403	13214E3471-3
19	PAJIZ	5305-00-889-3000	96906	MS35206-230
20	PAJIZ	5310-00-889-2544	96906	MS21045-06
21	XBJIZ		97403	13214E3471-2



WASHER, LOCK.....
WASHER, FLAT.....
SCREEN, CONDENSER.....
SCREW, MACHINE.....
GUARD, CONDENSER FAN.....
RIVET, BLIND.....
WASHER, CUP.....
PLATE, INFORMATION.....
RIVET, BLIND.....
PLATE, INFORMATION.....
RIVET, BLIND.....
PLATE, INFORMATION.....
RIVET, BLIND.....
PLATE, INSTRUCTION.....
SCREW, MACHINE.....
NUT, SELF-LOCKING.....
COVER, BLANK.....
SCREW, MACHINE.....
NUT, SELF-LOCKING.....
COVER, BLANK.....

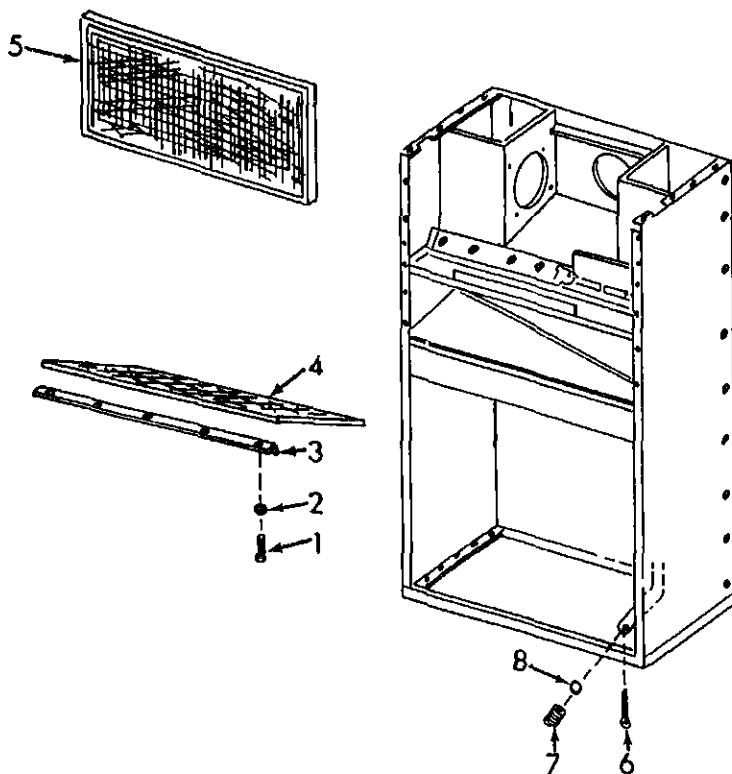



TS 4120-363-2

Figure 5. Filter, Mist Eliminator and Condensate Trap

1	PADZZ	5305-00-984-6193	96906	MS35206-245	SCREW,MACHINE.....
2	PAJZZ	5310-00-045-3299	96906	MS35338-42	WASHER, LOCK.....
3	XBJZZ		97403	13214E3856	ANGLE, FILTER RETAINING.....
4	PAJZZ	4130-00-938-0974	35338	A31547-2	FILTER ELEMENT, AIR
5	PAJZZ	4130-00-402-4497	97403	13214E3982	MIST ELIMINATOR
6	PAJZZ	5315-00-234-1E56	96906	MS24665-155	PIN, CUTTER.....
7	PBJZZ	5360-00-240-6526	97403	13211E8412	SPRING, HELICAL.....
8	PADZZ	3110-00-136-2696	97403	13211E8411	BALL, BEARING

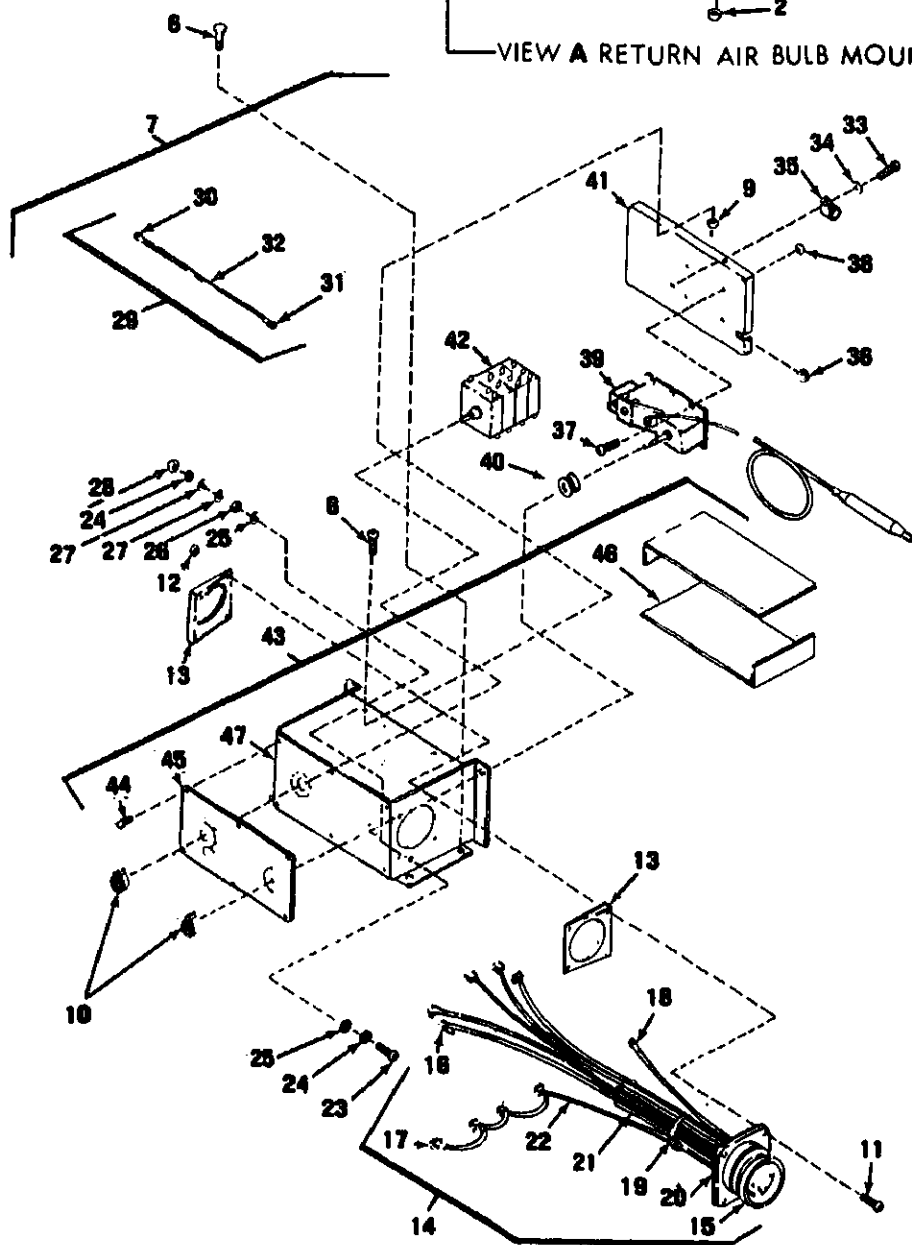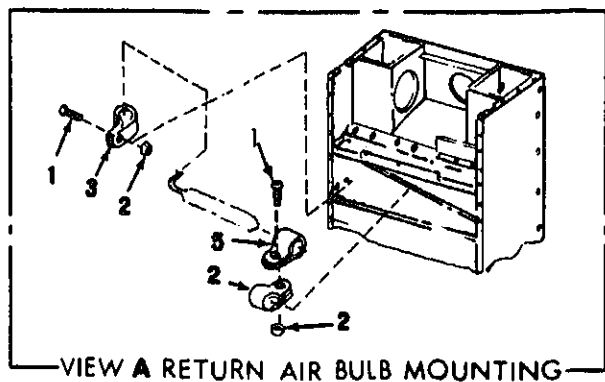


1	PAQZZ	5305-00-989-7434	96906	MS35207-263	SCREW, MACHINE.....
2	PAQZZ	5310-00-061-7326	96906	MS21045-3	NUT, SELF-LOCKING.....
3	PAQZZ	5340-00-253-5335	96906	MS2110402	CLAMP, LOOP.....
4	XOQZZ	5340-00-106-0551	96906	MS21104010	CLAMP, LOOP.....
5	PAQZZ	5340-00-105-8328	96906	MS2110406	CLAMP, LOOP.....
6	PAQZZ		81352	AN3-4A	BOLT, MACH.....
7	PBJOO		97403	13218E9963	CONTROL PANEL ASSY.....
8	PAQZZ	5305-00-984-6193	96906	MS35206-245	SCREW, MACHINE.....
9	PAQZZ	5310-00-889-2549	96906	MS21045-08	NUT, SELF-LOCKING.....
10	PAQZZ	5355-00-926-5289	86797	RB-175	KNOB.....
11	PAQZZ	5305-00-984-6221	96906	MS35206-234	SCREW, MACHINE.....
12	PAQZZ	5310-00-889-2544	96906	MS21045-06	NUT, SELF-LOCKING.....
13	XBJZZ		97403	13216E4537	WASHER, BEVELED.....
14	XBJOO		97403	13214E4021	WIRING HARNESS, CONTROL PANEL.....
15	PAQZZ	5935-00-853-3320	97403	1321E8399C28-9P	CONNECTOR, RECEPTACLE ELEC, BOX MFG.....
16	PAQZZ	5940-00-859-4475	00779	41532	TERMINAL, QUICK DISC TYPE.....
17	PAQZZ	5940-00-143-4774	96906	MS25036-153	TERMINAL, LUG.....
18	PAQZZ	5940-00-230-0515	96906	MS25036-154	TERMINAL, LUG.....
19	MOJOO		97403	13214E4021/3	TAPE, IMPREGNATED, MFD FROM MIL-T-43435T1.....
20	MOJOO		97403	13214E4021/5	INSULATION, SLEEVING, .125 ID X 1.00 L, MFD FROM MIL-I-23053/5 CL-1.....
21	MOJOO		97403	13214E4021/6	WIRE, ELECTRICAL, 14 AWG, MFD FROM M5086/1-14-9.....
22	MOJOO		97403	13214E4021/7	WIRE, ELECTRICAL, 16 AWG, WHITE, MFD FROM MIL-W-5086/1.....
23	PAQZZ	5305-00-993-1851	96906	MS35207-267	SCREW, MACHINE.....
24	PAQZZ	5310-00-045-3296	96906	MS35338-43	WASHER, LOCK.....
25	PAQZZ	5310-00-584-7800	96906	MS15795-708	WASHER, FLAT.....
26	PAQZZ	5310-00-934-4751	96906	MS35650-302	NUT, PLAIN, HEXAGON.....
27	PAQZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT.....
28	PAQZZ	5310-00-061-7326	96906	MS21045-3	NUT, SELF-LOCKING.....
29	XBJOO		97403	13218E9958-12	LEAD, ELECTRICAL.....
30	PAQZZ	5940-00-859-4475	00779	41532	TERMINAL, QUICK DISC TYPE.....
31	PAQZZ	5940-00-143-4774	96906	MS25036-153	TERMINAL, LUG.....
32	MOJOO		97403	13218E9958/3	WIRE, ELECTRICAL 16 AWG MFG FROM M5086/1-16-9.....
33	PAQZZ	5305-00-989-7434	96906	MS35207-263	SCREW, MACHINE.....
34	PAQZZ	5310-00-045-3296	96906	MS35338-43	WASHER, LOCK.....
35	PAQZZ	5340-00-543-4354	96906	MS21919066	CLAMP, LOOP.....
36	PAQZZ	5325-00-286-6047	96906	MS35489-1	GROMMET, NONMETALLIC.....
37	PAQZZ	5305-00-984-6193	96906	MS35206-245	SCREW, MACHINE.....
38	PAQZZ	5310-00-889-2549	96906	MS21045-08	NUT, SELF-LOCKING.....

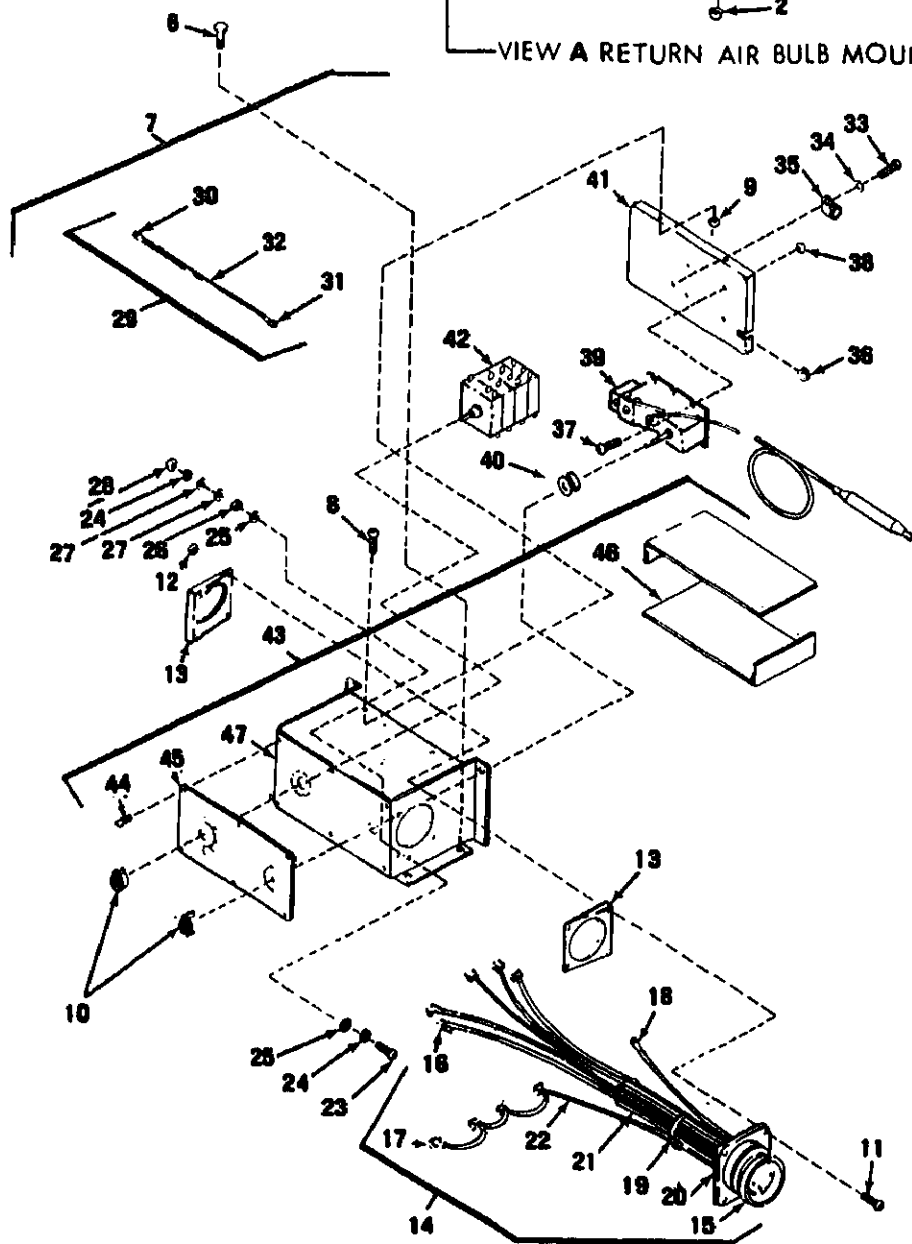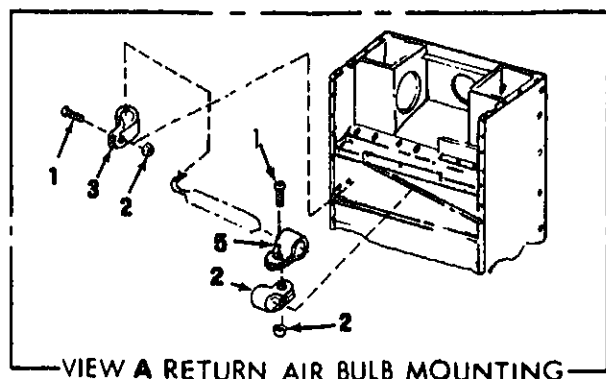

1	PAJZZ	5305-00-989-7434	96906	MS35207-263	SCREW,MACHINE.....
2	PAJZZ	5310-00-061-7326	96906	MS21045-3	NUT,SELF-LOCKING.....
3	PAJZZ	5340-00-253-5335	96906	MS2110402	CLAMP,LOOP.....
4	XBJZZ	5340-00-106-0551	96906	MS21104010	CLAMP,LOOP.....
5	PAJZZ	5340-00-105-8328	96906	MS2110406	CLAMP,LOOP.....
6	PAJZZ		81352	AN3-4A	BOLT,MACH.....
7	PBJOO		97403	13218E9963	CONTROL PANEL ASSY.....
8	PAJZZ	5305-00-984-6193	96906	MS35206-245	SCREW,MACHINE.....
9	PAJZZ	5310-00-889-2549	96906	MS21045-08	NUT,SELF-LOCKING.....
10	PAJZZ	5355-00-926-5289	86797	RB-175	KNOB.....
11	PAJZZ	5305-00-984-6221	96906	MS35206-234	SCREW,MACHINE.....
12	PAJZZ	5310-00-889-2544	96906	MS21045-06	NUT,SELF-LOCKING.....
13	XBJZZ		97403	13216E4537	WASHER,BEVELED.....
14	XBJOO		97403	13214E4021	WIRING HARNESS,CONTROL PANEL.....
15	PAJZZ	5935-00-853-3320	97403	13211E8399C28-9P	CONNECTOR,RECEPTACLE ELEC,BDX MTG.....
16	PAJZZ	5940-00-859-4475	00779	41532	TERMINAL,QUICK DISC TYPE.....
17	PAJZZ	5940-00-143-4774	96906	MS25036-153	TERMINAL,LUG.....
18	PAJZZ	5940-00-230-0515	96906	MS25036-154	TERMINAL,LUG.....
19	MOJOO		97403	13214E4021/3	TAPE,IMPREGNATED,MFD FROM MIL-T-43435T1.....
20	MOJOO		97403	13214E4021/5	INSULATION,SLEEVING, .125 ID X 1.00 L,MFD FROM MIL-I-23053/5 CL-1.....
21	MOJOO		97403	13214E4021/6	WIRE,ELECTRICAL,14 AWG,MFD FROM MS086/1-14-9.....
22	MOJOO		97403	13214E4021/7	WIRE,ELECTRICAL,16 AWG,WHITE,MFD FROM MIL-W-5086/1.....
23	PAJZZ	5305-00-993-1851	96906	MS35207-267	SCREW,MACHINE.....
24	PAJZZ	5310-00-045-3296	96906	MS35338-43	WASHER,LOCK.....
25	PAJZZ	5310-00-584-7800	96906	MS15795-708	WASHER,FLAT.....
26	PAJZZ	5310-00-934-5751	96906	MS35650-302	NUT,PLAIN,HEXAGON.....
27	PAJZZ	5310-00-809-8546	96906	MS27183-A	WASHER,FLAT.....
28	PAJZZ	5310-00-061-7326	96906	MS21045-3	NUT,SELF-LOCKING.....
29	XBJOO		97403	13218E9958-12	LEAD,ELECTRICAL.....
30	PAJZZ	5940-00-859-4475	00779	41532	TERMINAL,QUICK DISC TYPE.....
31	PAJZZ	5940-00-143-4774	96906	MS25036-153	TERMINAL,LUG.....
32	MOJOO		97403	13218E9958/3	WIRE,ELECTRICAL 16 AWG MFG FROM MS086/1-16-9.....
33	PAJZZ	5305-00-989-7434	96906	MS35207-263	SCREW,MACHINE.....
34	PAJZZ	5310-00-045-3296	96906	MS35338-43	WASHER,LOCK.....
35	PAJZZ	5340-00-543-4354	96906	MS2191906A	CLAMP,LOOP.....
36	PAJZZ	5325-00-286-6047	96906	MS35489-1	GROMMET,NONMETALLIC.....
37	PAJZZ	5305-00-984-6193	96906	MS35206-245	SCREW,MACHINE.....
38	PAJZZ	5310-00-889-2549	96906	MS21045-08	NUT,SELF-LOCKING.....

6	40	PAJZZ		96906	MS35490-6	.GROMMET
6	41	XBZZZ		97403	13214E4054	.PANEL, REAR CONTROL BOX.....
6	42	PAJZZ	5930-00-236-2351	97403	13216E6201	.SWITCH, ROTARY.....
6	43	XBDOO		97403	13214E4008	.CONTROL PANEL.....
6	44	PAJZZ	5320-00-932-1572	97403	13214E3789-2	..RIVET, BLIND.....
6	45	XBZZZ		97403	13214E4053	..PLATE, INFORMATION.....
6	46	XDZZZ	5970-00-173-2385	97403	13214E3762	..INSULATOR, ANGLE BRACE, ELEC.....
6	46	XBZZZ		97403	13214E4008-1	..CONTROL PANEL.....

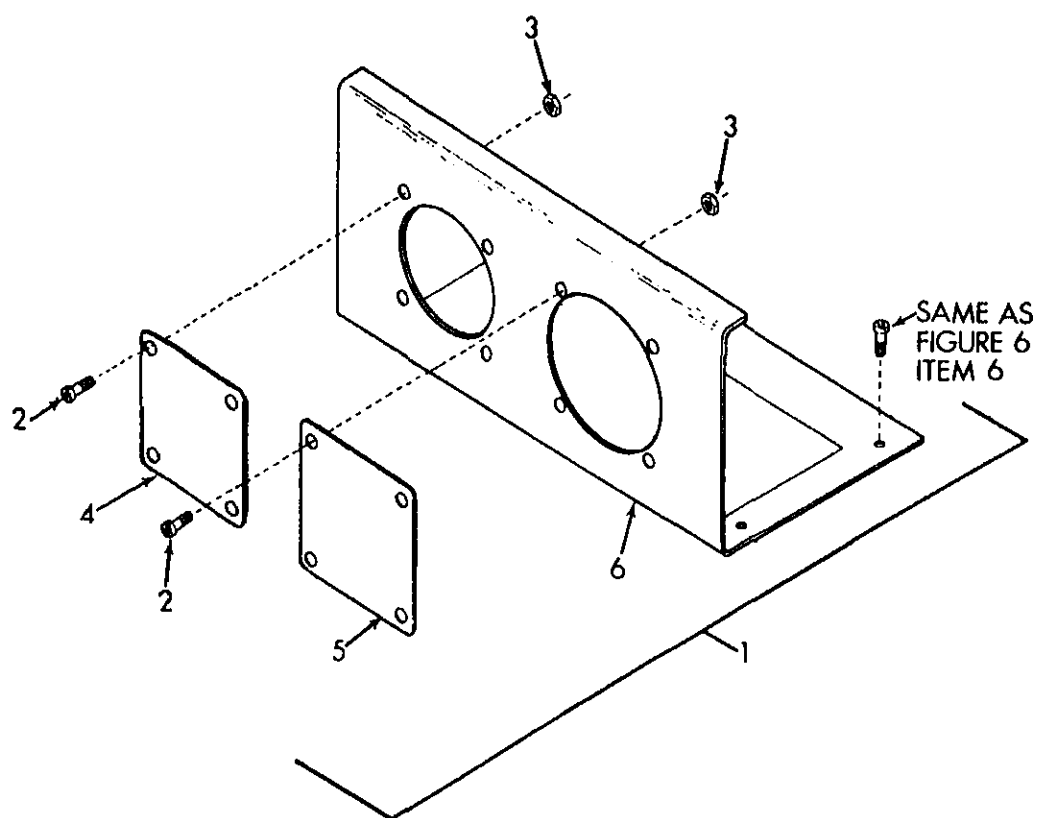

2	PA322	5305-00-889-3000	96906	MS35206-230	.SCREW, MACHINE.....
3	PA322	5310-00-889-2544	96906	MS21045-06	.NUT, SELF-LOCKING.....
4	X8322		97403	13214E9471-2	.COVER, BLANK.....
5	X8322		97403	13214E9471-3	.COVER, BLANK.....
6	X8322		97403	13214E9922-1	.BRACKET, BLOCK-OFF.....

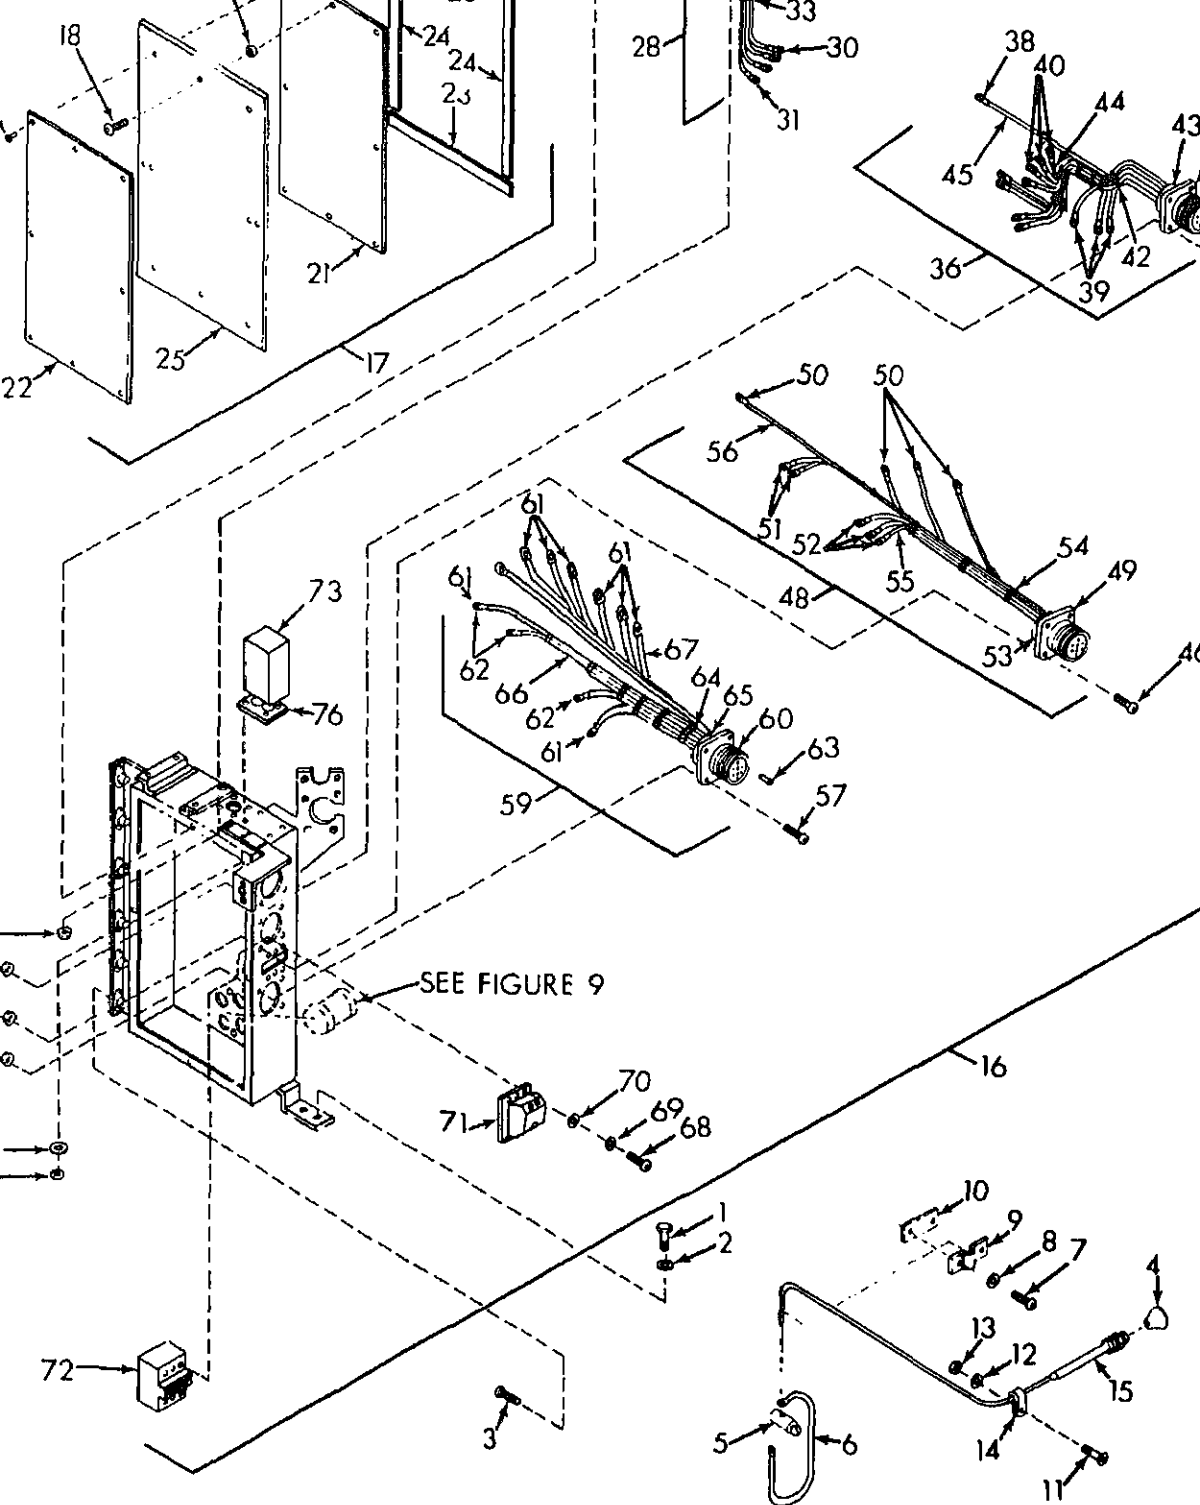



Figure 8. Junction Box External Components and
Wiring Harness

TS 4120-363-24P

14	PAJZZ	5310-00-081-7328	96906	MS21045-3	NUT, SELF-LOCKING.....	EA
15	PAJZZ	5340-00-078-3615	96906	MS21322-33	CLAMP, LOOP.....	EA
16	PAJZZ	3040-01-099-1414	41625	B48701X48-00	CONTROL ASSEMBLY.....	EA
17	XBJOO		97403	13218E9961	JUNCTION BOX ASSY.....	EA
18	XBJFF		97403	13217E6799-1	COVER, JUNCTION BOX.....	EA
19	PAJZZ	5305-00-959-5237	94222	12-11-203-12	SCREW, PANEL FSTNR.....	EA
20	PAJZZ	5310-00-880-9344	94222	12-11014-12	WASHER, LOCK.....	EA
21	PAJZZ	5320-00-932-1572	97403	13214E3789-2	REVEY, BLIND.....	EA
22	XBJZZ		97403	13217E6797	FLUID DIAGRAM, REPRIGERATION.....	EA
23	XBJZZ		97403	13217E6894	PLATE, INFORMATION, WIRING DIA.....	EA
24	MFFFF		97403	13217E6799-1-3	SEALING STRIP, .125 THK X .31 X 13.12 L, MFD FROM ASTM-D1056-S8E42CF2.....	EA
25	MDJOO		97403	13217E6799-1-2	SEALING STRIP, .125 THK X .31 X 16.75 L, MFD FROM ASTM-D1056-S8E42CF2.....	EA
26	XBJZZ		97403	13217E6799-1-1	PANEL, CONTROL BOX.....	EA
27	PAJZZ	5305-00-889-3000	96906	MS35206-230	SCREW, MACHINE.....	EA
28	PAJZZ	5310-00-889-2544	96906	MS21045-06	NUT, SELF-LOCKING.....	EA
29	XBOOO		97403	13214E4019	WIRING, HARNESS.....	EA
30	PADZZ	5935-00-850-6546	96906	MS3102R24-22PX	CONNECTOR, RECEPTACLE ELECTRICAL.....	EA
31	PAJZZ	5940-00-114-1305	96906	MS25036-116	TERMINAL, LUG.....	EA
32	PADZZ	5940-00-143-5284	96906	MS25036-115	TERMINAL, LUG.....	EA
33	XBJOO		97403	13214E4019	WIRING HARNESS .50 ID X 1.00 L, MFD FROM MIL-1-23053/5-CL.....	EA
34	MDJOO		97403	13214E4019/6	INSULATION SLEEVING.....	EA
35	MDJOO		97403	13214E4019/5	WIRE, ELECTRICAL, 8 AWG, MFD FROM MS086/2-8-9.....	EA
36	PAJZZ	5305-00-984-6153	96906	MS35206-245	SCREW, MACHINE.....	EA
37	PAJZZ	5310-00-889-2549	96906	MS21045-08	NUT, SELF-LOCKING.....	EA
38	XBJOO		97403	13214E4023	WIRING HARNESS.....	EA
39	PAJZZ	5940-00-143-4774	96906	MS25036-153	TERMINAL, LUG.....	EA

40	PAJZZ	5940-00-143-4780	96906	MS25036-138	..TERMINAL,LUG.....
41	PAJZZ	5935-00-565-6497	96906	MS25251-8	..PLUG,END SEAL,ELECT.....
42	MOJOO		97403	13214E4023/8	..TAPE,IMPREGNATED MFD FROM MIL-T-43435TL.....
43	MOJOO		97403	13214E4023/9	..INSULATION SLEEVING, .125 ID X 1.00 L,MFD FROM MIL-I-23053/5 CL-1.....
44	MOJOO		97403	13214E4023/5	..WIRE,ELECTRICAL,14 AWG,MFD FROM MS086/1-14-9.....
45	MOJOO		97403	13214E4023/6	..WIRE,ELECTRICAL,16 AWG,MFD FROM MS086/1-16-9.....
46	PAJZZ	5305-00-984-6193	96906	MS35206-245	..SCREW,MACHINE.....
47	PAJZZ	5310-00-889-2549	96906	MS21045-08	..NUT,SELF-LOCKING.....
48	XBJCO		97403	13217E6792	..WIRING HARNESS.....
49	PAJZZ	5935-00-260-3311	96906	MS3102R16-145X	..CONNECTOR,RECEPTACLE ELECTRIC,BOX MTD.....
50	PAJZZ	5940-00-143-4774	96906	MS25036-153	..TERMINAL,LUG.....
51	PAJZZ	5940-00-143-4780	96906	MS25036-108	..TERMINAL,LUG.....
52	PAJZZ	5940-00-855-4475	00779	41532	..TERMINAL,QUICK DISC.....
53	MOJOO		81349	MIL-I-23053/5CLA-1-.125ID	..INSULATION SLEEVING .0.125 ID X 1.00 L MFD FROM MIL-I-23053/5 CL-1.....
54	MOJOO		97403	13217E6792/3	..TAPE,IMPREGNATED LACING AND TYING MFR FROM MIL-T-43435TY153,FIN B.....
55	MOJOO		97403	13217E6792/8	..WIRE,ELECTRICAL 10 AWG MFD FROM MS086/2-10-9.....
56	MOJOO		97403	13217E6792/9	..WIRE,ELECTRICAL 16 AWG MFD FROM MS086/1-16-9.....
57	PAJZZ	5305-00-889-3000	96906	MS35206-230	..SCREW,MACHINE.....
58	PAJZZ	5310-00-889-2544	96906	MS21045-06	..NUT,SELF-LOCKING.....
59	XBJCO		97403	13214E4027	..WIRING HARNESS.....
60	PAJZZ	5935-00-878-6787	96906	MS3102R28-9SW	..CONNECTOR,RECEPTACLE ELECTRIC BOX MTD.....
61	PAJZZ	5940-00-143-4774	96906	MS25036-153	..TERMINAL,LUG.....
62	PAJZZ	5940-00-143-4780	96906	MS25036-108	..TERMINAL,LUG.....
63	PAJZZ	5340-00-823-5322	96906	MS25251-16	..PLUG,PROTECTIVE.....
64	MOJOO		97403	13214E4027/2	..TAPE,IMPREGNATED MFD FROM MIL-T-43435TL.....
65	MOJOO		97403	13214E4027/4	..INSULATION SLEEVING .125 ID X 1.00 L MFD FROM MIL-I-23053/5 CL-1.....
66	MOJOO		97403	13214E4027/5	..WIRE,ELECTRICAL,14 AWG,MFD FROM MS086/1-14-9.....
67	MOJOO		97403	13214E4027/6	..WIRE,ELECTRICAL,16 AWG,MFD FROM MS086/1-16-9.....
68	PAJZZ	5305-00-984-4584	96906	MS35206-227	..SCREW,MACHINE.....
69	PAJZZ	5310-00-045-4007	96906	MS35338-41	..WASHER,LOCK.....
70	PAJZZ	5310-00-082-1404	96906	MS27183-6	..WASHER,FLAT.....
71	XBJZZ		97403	13217E6793	..COVER,CIRCUIT BREAKER.....
72	PAJZZ	5925-01-100-0570	74193	JA3-Z18-6	..CIRCUIT BREAKER.....
73	PAJZZ	5950-00-433-6017	95790	C1-14423	..TRANSFORMER,POWER.....
74	PAJZZ	5310-00-081-8087	96906	MS21044ND6	..NUT,SELF-LOCKING.....
75	PAJZZ	5310-00-579-0079	96906	MS35333-37	..WASHER,LOCK.....
76	XBJZZ		97403	13218E9960	..GASKET,TRANSFORMER.....

2	PAJZZ	5310-00-045-3296	96906	MS35338-43	..WASHER, LOCK.....
3	PAJZZ	5310-00-809-8546	96906	MS27183-8	..WASHER, FLAT.....
4	XB300		97403	13216E4511	..FILTER ASSY, RFI.....
5	PAJZZ	5305-00-984-4588	96906	MS35206-228	..SCREW, MACHINE.....
6	PAJZZ	5310-00-082-1404	96906	MS27183-6	..WASHER, FLAT.....
7	XB3ZZ		97403	13216E4521	..END CAP, TOP RFI FILTER.....
8	PAJZZ	5961-00-913-1749	58849	SS-0257	..SEMICONDUCTOR DEVICE.....
9	XB3ZZ		97403	13216E4515	..GASKET, INTERFERENCE.....
10	XB300		97403	13216E4516-1	..FILTER, ASSY, BAND SUPPRESSION.....
11	PAJZZ	5940-00-859-4475	00779	41532	...TERMINAL, QUICK DISC TYPE TAB RECEPTACLE.....
12	PA0ZZ	5940-00-143-4774	96906	MS25036-153	...TERMINAL, LUG.....
13	PAJZZ	5915-00-851-0366	56289	5JX100	...FILTER, RADIO FREQUENCY.....
14	XB300		97403	13216E4516/3	..WIRE, ELECTRICAL, 16 AWG, MFD FROM MS086/1-16-9.....
15	XB300		97403	13216E4516-3	..FILTER ASSY, BAND SUPPRESSION.....
16	PAJZZ	5940-00-859-4475	00779	41532	...TERMINAL, QUICK DISC TYPE TAB RECEPTACLE.....
17	PAJZZ	5940-00-143-4774	96906	MS25036-153	...TERMINAL, LUG.....
18	PA0ZZ	5915-00-851-0366	56289	5JX100	...FILTER, RADIO FREQUENCY.....
19	XB300		97403	13216E4516/3	..WIRE, ELECTRICAL, 16 AWG, MFD FROM MS086/1-16-9.....
20	XB300		97403	13216E4516-2	..FILTER ASSY, BAND SUPPRESSION.....
21	PAJZZ	5940-00-859-4475	00779	41532	...TERMINAL, QUICK DISC TYPE TAB RECEPTACLE.....
22	PAJZZ	5940-00-143-4774	96906	MS25036-153	...TERMINAL, LUG.....
23	PAJZZ	5915-00-851-0366	56289	5JX100	...FILTER, RADIO FREQUENCY.....
24	XB300		97403	13216E4516/3	..WIRE, ELECTRICAL, 16 AWG, MFD FROM MS086/1-16-9.....
25	XB300		97403	13216E4516-4	..FILTER ASSY, BAND SUPPRESSION.....
26	PAJZZ	5940-00-859-4475	00779	41532	...TERMINAL, QUICK DISC TYPE TAB RECEPTACLE.....
27	PAJZZ	5940-00-143-4774	96906	MS25036-153	...TERMINAL, LUG.....
28	PAJZZ	5915-00-851-0366	56289	5JX100	...FILTER, RADIO FREQUENCY.....
29	XB300		97403	13216E4516/3	..WIRE, ELECTRICAL, 16 AWG, MFD FROM MS086/1-16-9.....
30	XB300		97403	13216E4512	..TUBE ASSY RFI FILTER.....
31	XB3ZZ		97403	13216E4512-2	..END CAP BOTTOM RFI FILTER.....
32	XB3ZZ		97403	13216E4515	..GASKET, RFI INTERFERENCE.....
33	PA0ZZ	5310-01-058-3352	80205	NAS1329H3K80	..NUT, PLAIN, BLIND RIV.....
34	PAJZZ	5320-00-323-3984	07707	AK41H	..RIVET, BLIND.....
35	XB3ZZ		97403	13216E4539-1	..NUT-ANCHOR, ONE-LUG FLOATING.....
36	XB3ZZ		97403	13216E4512-1	..TUBE RFI FILTER.....
37	PAJZZ	5320-00-882-8388	07707	AD43H	..RIVET, BLIND.....

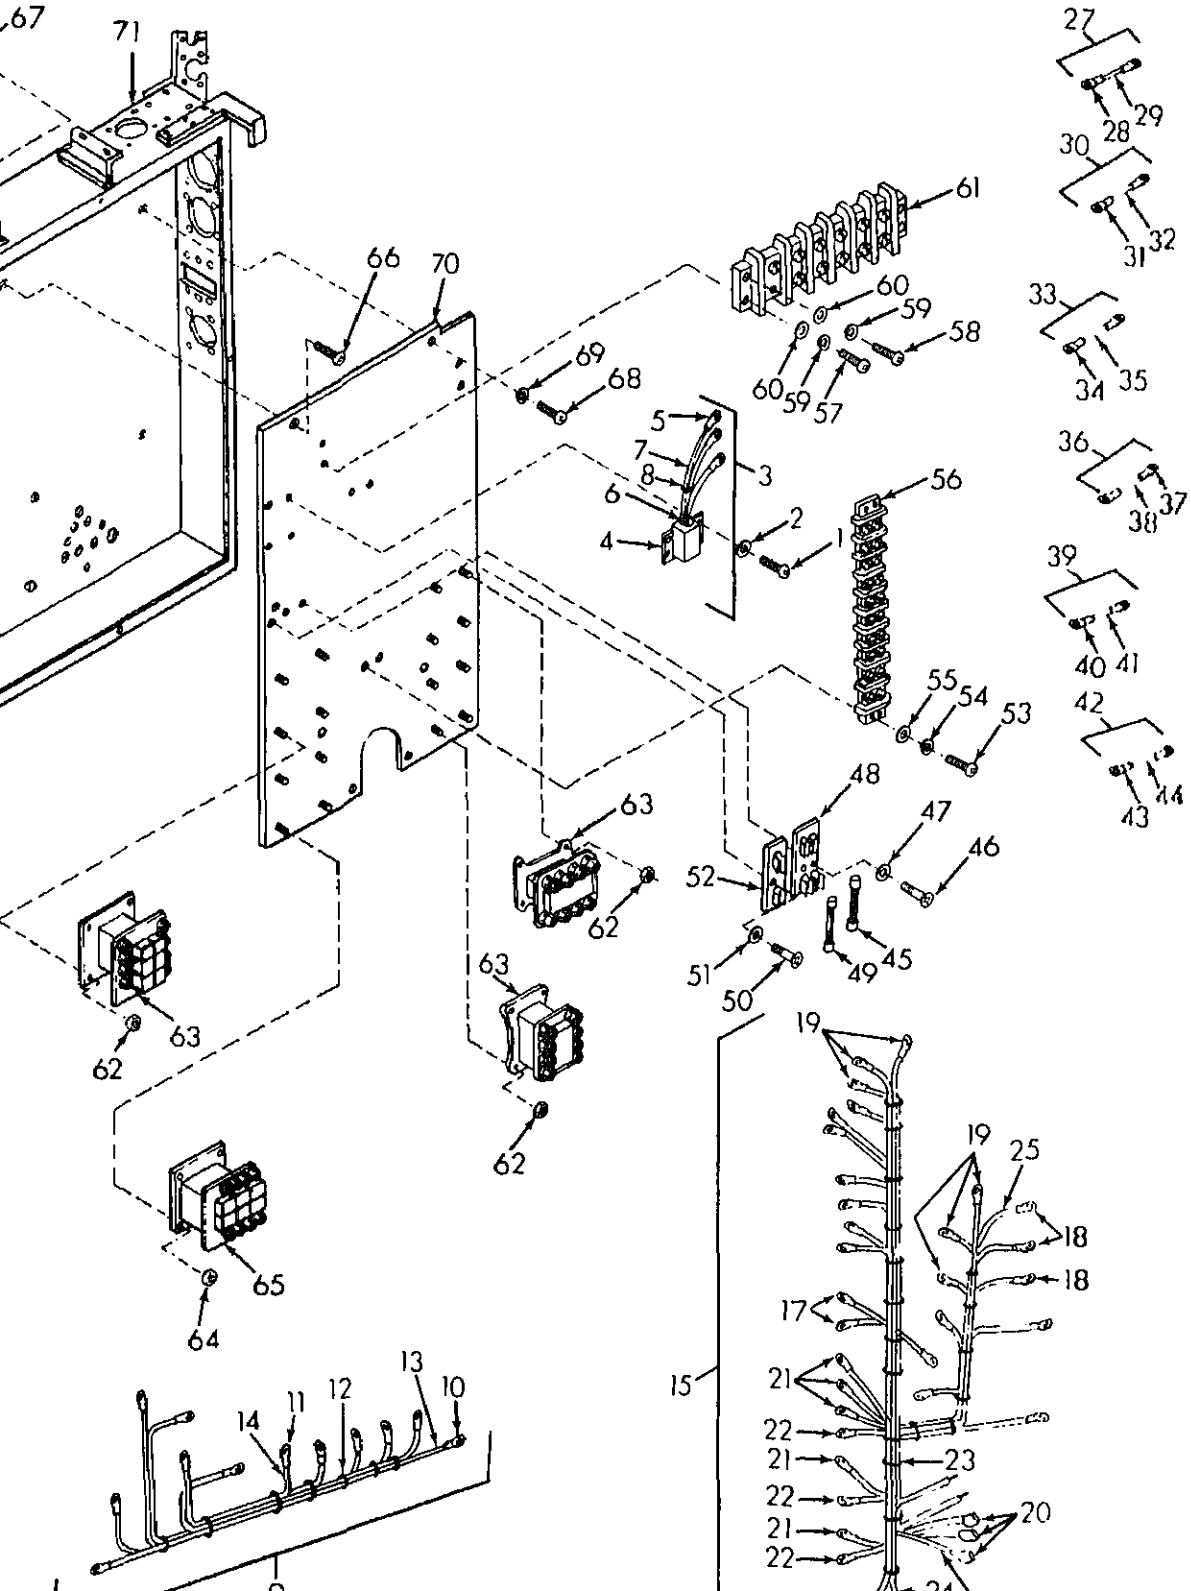

2	PAJZZ	5910-00-943-2410	96906	MS35336-40	..WASHER, LOCK.....
3	AOJ00		97403	13218ET071-2	..WIRING HARNESS TIME DELAY.....
4	PAJZZ	5945-00-007-7668	02289	1600-5590-2	..RELAY, ELECTROMAGNET.....
5	PAJZZ	5940-00-143-4774	96906	MS25036-153	..TERMINAL, LUG.....
6	MOJ00		97403	13218E7071/2	..INSULATION SLEEVING, .125 TO X 1.00 L, MFD FROM MIL-I-23053/5 CL-1.....
7	MOJ00		97403	13218E7071/6	..WIRE, ELECTRICAL, 16 AWG, MFD FROM MS086/1-16-9.....
8	MOJ00		97403	13218E7071/4	..TAPE, IMPREGNATED, LACING AND TYING MFD FROM MIL-T-43435
9	XBJ00		97403	13214E4058	..LEAD ASSEMBLY.....
10	PAJZZ	5940-00-143-4780	96906	MS25036-108	..TERMINAL, LUG.....
11	PAJZZ	5940-00-143-4794	96906	MS25036-112	..TERMINAL, LUG.....
12	MOJ00		97403	13214E4058/4	..TAPE, IMPREGNATED MFD FROM MIL-T-43435T1.....
13	MOJ00		97403	13214E4058/3	..WIRE, ELECTRICAL, 16 AWG, MFD FROM MS086/1-16-9.....
14	MOJ00		97403	13214E4058/5	..WIRE, ELECTRICAL, 10 AWG, MFD FROM MS086/2-10-9.....
15	XBJ00		97403	13217E6791	..WIRING HARNESS.....
16	PAJZZ	5940-00-283-5280	96906	MS25036-106	..TERMINAL, LUG.....
17	PAJZZ	5940-00-143-4774	96906	MS25036-153	..TERMINAL, LUG.....
18	PAJZZ	5940-00-143-4780	96906	MS25036-108	..TERMINAL, LUG.....
19	PAJZZ	5940-00-143-4754	96906	MS25036-112	..TERMINAL, LUG.....
20	PAJZZ	5940-00-859-4475	00779	41532	..TERMINAL, QUICK DISC TYPE TAB RECEPTACLE.....
21	PAJZZ	5940-00-230-0515	96906	MS25036-154	..TERMINAL, LUG.....
22	PAJZZ	5940-00-143-4777	96906	MS25036-157	..TERMINAL, LUG.....
23	MOJ00		97403	13217E6791/11	..TAPE, IMPREGNATED MFD FROM MIL-T-43435T1.....
24	MOJ00		97403	13217E6791/1	..WIRE, ELECTRICAL, 16 AWG, MFD FROM MS086/1-16-9.....
25	MOJ00		97403	13217E6791/2	..WIRE, ELECTRICAL, 14 AWG, MFD FROM MS086/1-14-9.....
26	MOJ00		97403	13217E6791/3	..WIRE, ELECTRICAL, 10 AWG, MFD FROM MS086/2-10-9.....
27	XBJ00		97403	13218E9958-2	..LEAD ELECTRICAL.....
28	PAJZZ	5940-00-143-4774	96906	MS25036-153	..TERMINAL, LUG.....
29	MOJ00		97403	13218E9958/3	..WIRE, ELECTRICAL, 16 AWG, MFD FROM MS086/1-16-9.....
30	XBJ00		97403	13218E9958-3	..LEAD ELECTRICAL.....
31	PAJZZ	5940-00-143-4774	96906	MS25036-153	..TERMINAL, LUG.....
32	MOJ00		97403	13218E9958/3	..WIRE, ELECTRICAL, 16 AWG, MFD FROM MS086/1-16-9.....
33	XBJ00		97403	13218E9958-4	..LEAD, ELECTRICAL.....
34	PAJZZ	5940-00-143-4774	96906	MS25036-153	..TERMINAL, LUG.....
35	MOJ00		97403	13218E9958/3	..WIRE, ELECTRICAL, 16 AWG, MFD FROM MS086/1-16-9.....
36	XBJ00		97403	13218E9958-5	..LEAD ELECTRICAL.....
37	PAJZZ	5940-00-230-0515	96906	MS25036-154	..TERMINAL, LUG.....
38	MOJ00		97403	13218E9958/2	..WIRE, ELECTRICAL, 14 AWG, MFD FROM MS086/1-14-9.....
39	XBJ00		97403	13218E9958-6	..LEAD ELECTRICAL.....

10	41	MD300		97403	13218E9958/2	..WIRE,ELECTRICAL,14 AWG,MFD FROM M5086/1-14-9.....
10	42	XB300		97403	13218E9958-7	..LEAD ELECTRICAL.....
10	43	PA022	5940-00-230-0515	96906	MS25036-154	..TERMINAL,LUG.....
10	44	MD300		97403	13218E9958/2	..WIRE,ELECTRICAL,14 AWG,MFD FROM M5086/1-14-9.....
10	45	PA322	5920-00-280-3175	81349	F098259V1-6-10A	..FUSE.....
10	46	PA322	5305-00-958-5451	96906	MS35190-239	..SCREW,MACHINE.....
10	47	PA322	5310-00-950-0284	96906	MS35336-9	..WASHER,LOCK.....
10	48	XB322		97403	13211E378	..FUSE HOLDER.....
10	49	PA022	5920-00-939-5442	71400	KAW5	..FUSE,CARTRIDGE.....
10	50	PA322	5305-00-958-5451	96906	MS35190-239	..SCREW,MACHINE.....
10	51	PA322	5310-00-950-0284	96906	MS35336-9	..WASHER,LOCK.....
10	52	XB322		97403	13214E3811	..FUSEHCLDER.....
10	53	PA322	5305-00-995-3444	96906	MS35207-266	..SCREW,MACHINE.....
10	54	PA322	5310-00-045-3296	96906	MS35338-43	..WASHER,LOCK.....
10	55	PA322	5310-00-809-8546	96906	MS27183-8	..WASHER,FLAT.....
10	56	XB322		81349	MIL-T-55164/3-TY 397B10	..TERMINAL BOARD.....
10	57	PA322	5305-00-984-6158	96906	MS35206-250	..SCREW,MACHINE.....
10	58	PA322	5305-00-984-6197	96906	MS35206-249	..SCREW,MACHINE.....
10	59	PA322	5310-00-045-3299	96906	MS35338-42	..WASHER,LOCK.....
10	60	PA322	5310-00-809-8544	96906	MS27183-7	..WASHER,FLAT.....
10	61	XB322		97403	13214E4013	..TERMINAL BOARD.....
10	62	PA322	5310-00-889-2544	96906	MS21045-06	..NUT,SELF-LOCKING.....
10	63	PA322	5945-00-549-6348	96906	MS2419201	..RELAY,25 AMP,3 PST, N.O.-TYPE II.....
10	64	PA322	5310-00-889-2544	96906	MS21045-06	..NUT,SELF-LOCKING,HE.....
10	65	PA322	5945-00-826-2218	96906	MS24193-01	..RELAY,ELECTROMAGNET N.O. TYPE II.....
10	66	PA322	5305-00-993-1851	96906	MS35207-267	..SCREW,MACHINE.....
10	67	PA322	5310-00-061-7326	96906	MS21045-3	..NUT,SELF-LOCKING.....
10	68	PA322	5305-00-989-7434	96906	MS35207-263	..SCREW,MACHINE.....
10	69	PA322	5310-00-045-3296	96906	MS35338-43	..WASHER,LOCK.....
10	70	XB322		97403	13218E7072	..PANEL,JUNCTION BOX.....
10	71	XB322		97403	13217E6794	..JUNCTION BOX.....

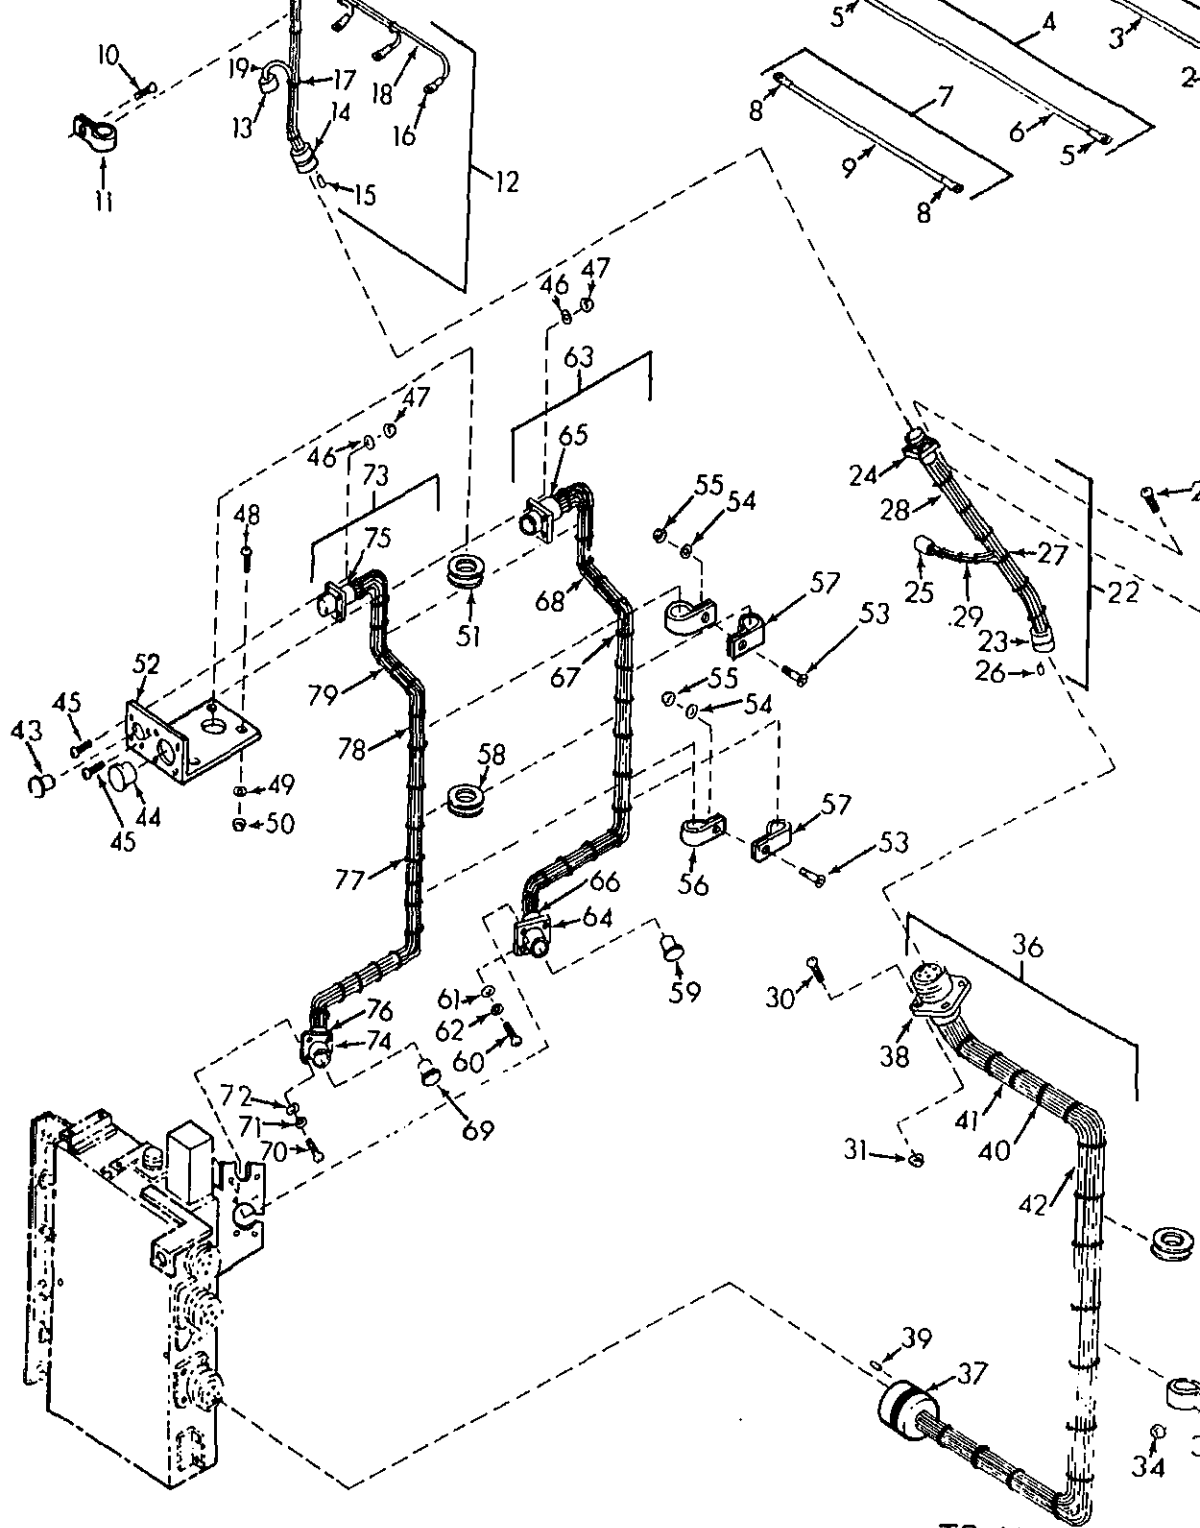



Figure 11. Upper Section Wiring Harness

TS 4120-363-24F

MO000		97403	13214E4032	WIRING HARNESS PT-P3.....	EA
PAJZZ	5935-00-805-4591	96906	MS3106R14S7S	.CONNECTOR, PLUG, ELEC.....	EA
PAJZZ	5935-00-881-1532	96906	MS3106R28-9PX	.CONNECTOR PLUG ELEC.....	EA
PAJZZ	5340-00-823-5322	96906	MS25251-16	.PLUG, PROTECTIVE.....	EA
PAJZZ	5940-00-143-4720	96906	MS25036-108	.TERMINAL, LUG.....	EA
MOJZZ		97403	13214E4032/5	.TAPE, IMPREGNATED MFD MIL-T-43435T1FBSZ3.....	RL
MO000		97403	13214E4032/6	.WIRE, ELECTRICAL, 14 AWG, MFD FROM MS086/1-14-9.....	EA
MOJ00		97403	13214E4032/7	.WIRE, ELECTRICAL, 16 AWG, MFD FROM MS086/1-16-9.....	EA
PAJZZ	5305-00-889-3000	96906	MS35206-230	SCREW, MACHINE.....	EA
PAJZZ	5310-00-889-2544	96906	MS21045-06	NUT, SELF-LOCKING.....	EA
MOJ00		97403	13214E4031	WIRING HARNESS J7-P6-P12.....	EA
PAJZZ	5935-01-095-6413	96906	MS3106R28-9PZ	.CONNECTOR, PLUG, ELEC.....	EA
PAJZZ	5935-00-947-8176	96906	MS3100R28-9SX	.CONNECTOR, RECEPTACLE.....	EA
PAJZZ	5935-00-725-4638	96906	MS3106R136-35	.CONNECTOR, PLUG ELEC.....	EA
PAJZZ	5340-00-823-5322	96906	MS25251-16	.PLUG, PROTECTIVE.....	EA
MOJZZ		97403	13214E4031/5	.TAPE, IMPREGNATED MFD MIL-T-43435T1FBSZ3.....	RL
MOJ00		97403	13214E4031/7	.WIRE, ELECTRICAL, 14 AWG, MFD FROM MS086/1-4-9.....	EA
MOJ00		97403	13214E4031/8	.WIRE, ELECTRICAL, 16 AWG, MFD FROM MS086/1-16-9.....	EA
PAJZZ	5305-00-889-3000	96906	MS35206-230	SCREW, MACHINE.....	EA
PAJZZ	5310-00-889-2544	96906	MS21045-06	NUT, SELF-LOCKING.....	EA
PAJZZ	5325-00-281-1557	96906	MS35489-17	GROMMET, NONMETALLIC.....	EA
PAJZZ	5305-00-989-7434	96906	MS35207-263	SCREW, MACHINE.....	EA
PAJZZ	5310-00-061-7326	96906	MS21045-3	NUT, SELF-LOCKING.....	EA
PAJZZ	5340-00-105-8328	96906	MS2110406	CLAMP, LOOP.....	EA
MOJ00		97403	13214E4029	WIRING HARNESS.....	EA
PAJZZ	5935-00-480-3752	96906	MS3106R28-9PW	.CONNECTOR PLUG ELEC.....	EA
PAJZZ	5935-01-095-8434	96906	MS3100R28-9SZ	.CONNECTOR, RECEPTACLE.....	EA
PAJZZ	5340-00-823-5322	96906	MS25251-16	.PLUG, PROTECTIVE.....	EA

NO	NO	CODE	STOCK NUMBER	FSCM	NUMBER	USABLE ON CDD
11	40	M0300		97403	13214E029/5	.TAPE, IMPREGNATED MFD FROM MIL-T-43435T1FB.....
11	41	M0300		97403	13214E029/6	.WIRE, ELECTRICAL, 14 AWG, MFD FROM M5086/1-14-9.....
11	42	M0300		97403	13214E029/7	.WIRE, ELECTRICAL, 16 AWG, MFD FROM M5086/1-16-9.....
11	43	PA022	5340-01-041-9914	96906	M590376-28Y	CAP, PROTECTIVE, DUST.....
11	44	PA022	5340-00-889-8677	96906	M590376-24R	CAP, PROTECTIVE, DUST.....
11	45	PA022	5305-00-889-3000	96906	M535206-230	SCREW, MACHINE.....
11	46	PA022	5310-00-983-8483	96906	M527183-5	WASHER, FLAT.....
11	47	PA022	5310-00-889-2544	96906	M521045-06	NUT, SELF-LOCKING.....
11	48	PA022	5305-00-995-3444	96906	M535207-266	SCREW, MACHINE.....
11	49	PA022	5310-00-409-8546	96906	M527183-8	WASHER, FLAT.....
11	50	PA022	5310-00-061-7326	96906	M521045-3	NUT, SELF-LOCKING.....
11	51	PA022	5325-00-171-6387	96906	M535489-51	GROMMET, NONMETALLIC.....
11	52	XB022		97403	13217E6820	BRACKET, CONNECTOR MTG.....
11	53	PA022	5305-00-957-7086	96906	M5246935273	SCREW, MACHINE.....
11	54	PA022	5310-00-823-8804	96906	M527183-9	WASHER, FLAT.....
11	55	PA022	5310-00-061-7326	96906	M521045-3	NUT, SELF-LOCKING.....
11	56	PA022	5340-00-898-2083	96906	M521322-38	CLAMP, LOOP.....
11	57	PA022	5340-00-929-3506	96906	M521322-40	CLAMP, LOOP.....
11	58	PA022	5325-00-074-3301	96906	M521266-2N	GROMMET, NONMETALLIC.....
11	59	PA022	5340-00-191-4898	96906	M590376-24Y	CAP, PROTECTIVE, DUST.....
11	60	PA022	5305-00-989-7434	96906	M535207-263	SCREW, MACHINE.....
11	61	PA022	5310-00-805-8546	96906	M527183-8	WASHER, FLAT.....
11	62	PA022	5310-00-045-3296	96906	M535338-43	WASHER, LOCK.....
11	63	XB020		97403	13217E6824	WIRING HARNESS J17-J18.....
11	64	PA022	5935-00-951-9777	97403 97403	13211E8399C24-22 S	.CONNECTOR, RECEPTACLE ELECTRIC, BOX MOUNTING.....
11	65	PA022	5935-00-853-3133	96906	M53100R24-22P	.CONNECTOR, RECEPTACLE ELECTRIC.....
11	66	M0322		97403	13217E6824/6	.INSULATION SLEEVING, 0.187 ID X 1.00 L, MFD FROM MIL-I-23053/5 CL-1.....
11	67	M0300		97403	13217E6824/3	.TAPE, IMPREGNATED MFD FROM MIL-T-43435T1FB.....
11	68	M0300		97403	13217E6824/5	.WIRE, ELECTRICAL, 8 AWG, MFD FROM M5086/2-8-9.....
11	69	PA022	5340-01-046-5888	96906	M590376-28R	CAP, PROTECTIVE, DUST.....
11	70	PA022	5305-00-989-7434	96906	M535207-263	SCREW, MACHINE.....
11	71	PA022	5310-00-045-3296	96906	M535338-43	WASHER, LOCK.....
11	72	PA022	5310-00-805-8546	96906	M527183-8	WASHER, FLAT.....
11	73	XB000		97403	13217E6825	WIRING HARNESS.....
11	74	PA022	5935-00-853-3320	97403	13211E8399C28-9P	.CONNECTOR, RECEPTACLE ELECTRIC, BOX MOUNTING.....
11	75	PA022	5935-00-826-3956	96906	M53100R28-95	.CONNECTOR, RECEPTACLE ELECTRIC.....
11	76	M0322		97403	13217E6825/3	.INSULATION SLEEVING, .125 ID X 1.00 L, MFD FROM MIL-I-23053/5 CL-1.....


ON	(2)	(3)	(4)	(5)	(6)	(7)
ITEM O	SMR CODE	NATIONAL STOCK NUMBER	FSCM	PART NUMBER	DESCRIPTION	USABLE ON CODE
77	MOJZZ		974 03	13217E6825/4	.TAPE,IMPREGNATED MFD FROM MIL-T-43435Y1F8.....	RL
78	MOJOO		974 03	13217E6825/6	.WIRE,ELECTRICAL, 14 AWG,MFD FROM M5086/1-14-9.....	EA
79	MOJOD		974 03	13217E6825/7	.WIRE,ELECTRICAL, 16 AWG,MFD FROM M5086/1-16-9.....	EA

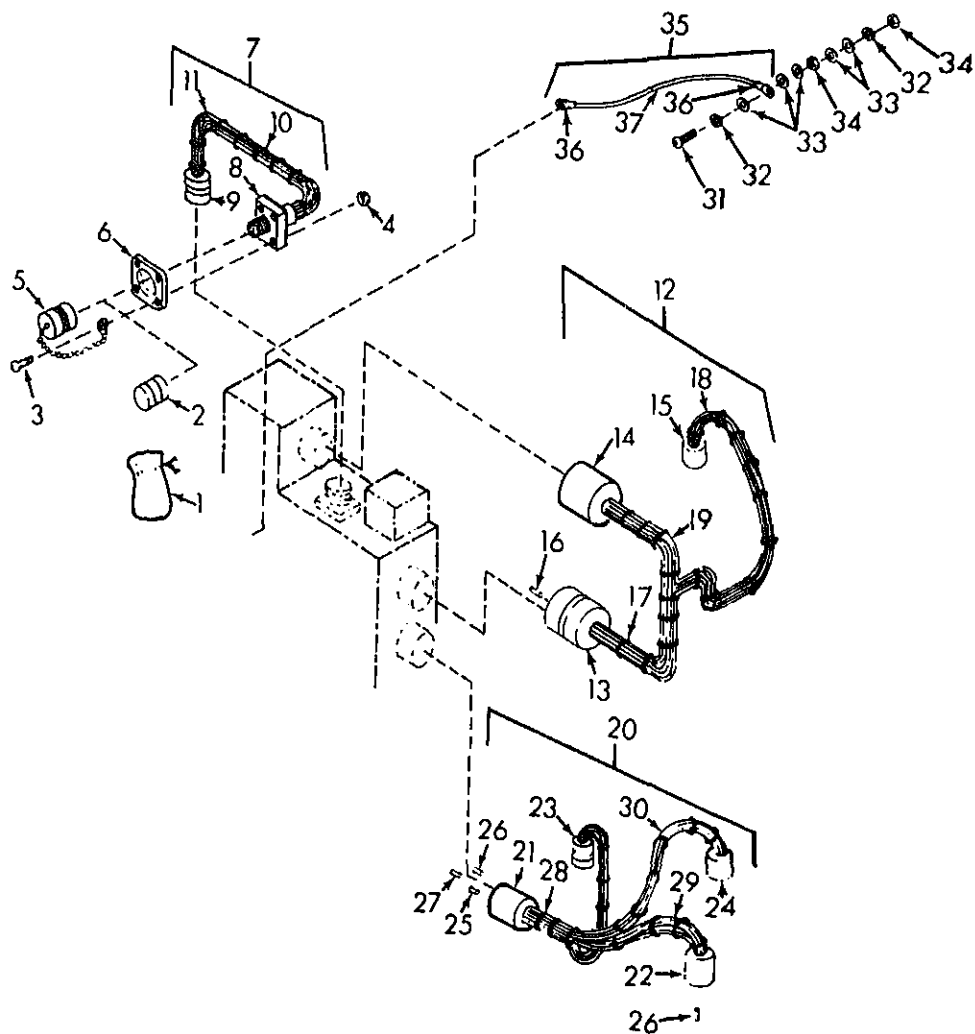


TS 4120-363-241

Figure 12. Lower Section Wiring Harness

ITEM NO	(2)	(3)	(4)	(5)	(6)	USABLE ON CODE
DESCRIPTION	SMR CODE	NATIONAL STOCK NUMBER	FSCM	PART NUMBER		
1	XBJZZ		81349	PPP-B-20	BAG, 4.5 X 8.0.....	
2	PAJZZ	5935-00-816-8644	96906	MS3106R24-22S	CONNECTOR, PLUG, STRAIGHT.....	
3	PAJZZ	5305-00-889-3C00	96906	MS35206-230	SCREW, MACHINE.....	
4	PAJZZ	5310-00-889-2544	96906	MS21045-06	NUT, SELF-LOCKING.....	
5	PAJZZ	5935-00-578-2742	96906	MS25043-240	COVER, ELECTRICAL CONNECTOR.....	
6	PAJZZ	5330-00-063-7889	96906	MS51007-9	GASKET.....	
7	XBJGO		97403	13214E4018	WIRING HARNESS J1-P 13.....	
8	PAJZZ	5935-00-853-3133	96906	MS3100R24-22P	CONNECTOR, RECEPTACLE ELECTRIC, WALL MTD.....	
9	PAJZZ	5935-01-095-6414	96906	MS3106R24-22SX	CONNECTOR, PLUG, ELEC.....	
10	MOJND		97103	13214E4018-3	TAPE, IMPREGNATED MFD FROM MIL-T-43435T1FB.....	
11	MOJND		97403	13214E4018/5	WIRE, ELECTRICAL, 8 AWG, MFD FROM MS086/2-8-9.....	
12	XBJOD		97403	13214E4022	WIRING HARNESS P2-P4-P8.....	
13	PAJZZ	5935-00-557-1438	96906	MS3106E36-14P	CONNECTOR, PLUG, ELEC.....	
14	PAJZZ	5935-00-826-3956	96906	MS3100R28-9S	CONNECTOR, RECEPTACLE ELECTRIC.....	
15	PAJZZ	5935-00-755-3493	96906	MS3106R16-10S	CONNECTOR, PLUG.....	
16	PAJZZ	5935-00-565-9497	96906	MS25251-8	PLUG, END SEAL, ELECT.....	
17	MOJOD		97403	13214E4022-5	TAPE, IMPREGNATED MFD FROM MIL-T-43435T1FB.....	
18	MOJOD		97403	13214E4022/7	WIRE, ELECTRICAL, 14 AWG, MFD FROM MS086/1-14-9.....	
19	MOJOD		97403	13214E4022/8	WIRE, ELECTRICAL, 16 AWG, MFD FROM MS086/1-16-9.....	
20	XBJOD		97403	13214E4026	WIRING HARNESS P5-P10-P11-P16.....	
21	PAJZZ		96906	MS3106A36-14PX	CONNECTOR PLUG ELEC.....	
22	PAJZZ	5935-00-878-7588	96906	MS3106R24-11S	CONNECTOR, PLUG.....	
23	PAJZZ	5935-00-725-4638	96906	MS3106R125-3S	CONNECTOR, PLUG, ELEC.....	
24	PAJZZ	5935-01-083-3251	96906	MS3106R1253SY	CONNECTOR, PLUG, ELEC.....	
25	PAJZZ	5340-00-823-5322	96906	MS25251-16	PLUG, PROTECTIVE.....	
26	PAJZZ	5935-00-565-95C3	96906	MS25251-12	PLUG, END SEAL, ELECT.....	
27	PAJZZ	5935-00-565-9497	96906	MS25251-8	PLUG, END SEAL, ELECT.....	
28	MOJND		97403	13214E4026/8	TAPE, IMPREGNATED MFD FROM MIL-T-43435T1FB.....	
29	MOJOD		97403	13214E4026/10	WIRE, ELECTRICAL, 10 AWG, MFD FROM MS086/2-10-9.....	
30	MOJND		97403	13214E4026/11	WIRE, ELECTRICAL, 16 AWG, MFD FROM MS086/1-16-9.....	
31	PAJZZ	5305-00-993-2457	96906	MS35207-284	SCREW, MACHINE.....	
32	PAJZZ	5310-00-582-5565	96906	MS35338-44	WASHER, LOCK.....	
33	PAJZZ	5310-00-809-4058	96906	MS27183-10	WASHER, FLAT.....	
34	PAJZZ	5310-00-043-0520	96906	MS35650-3252	NUT, PLAIN, HEXAGON.....	
35	XBJOD		97403	13218E9958-1	LEAD, ELECTRICAL.....	
36	PAJZZ	5940-00-114-1305	96906	MS25036-116	TERMINAL, LUG.....	
37	MOJOD		97403	13218E9958/1	WIRE, ELECTRICAL, 8 AWG, MFD FROM MS086/2-8-9.....	

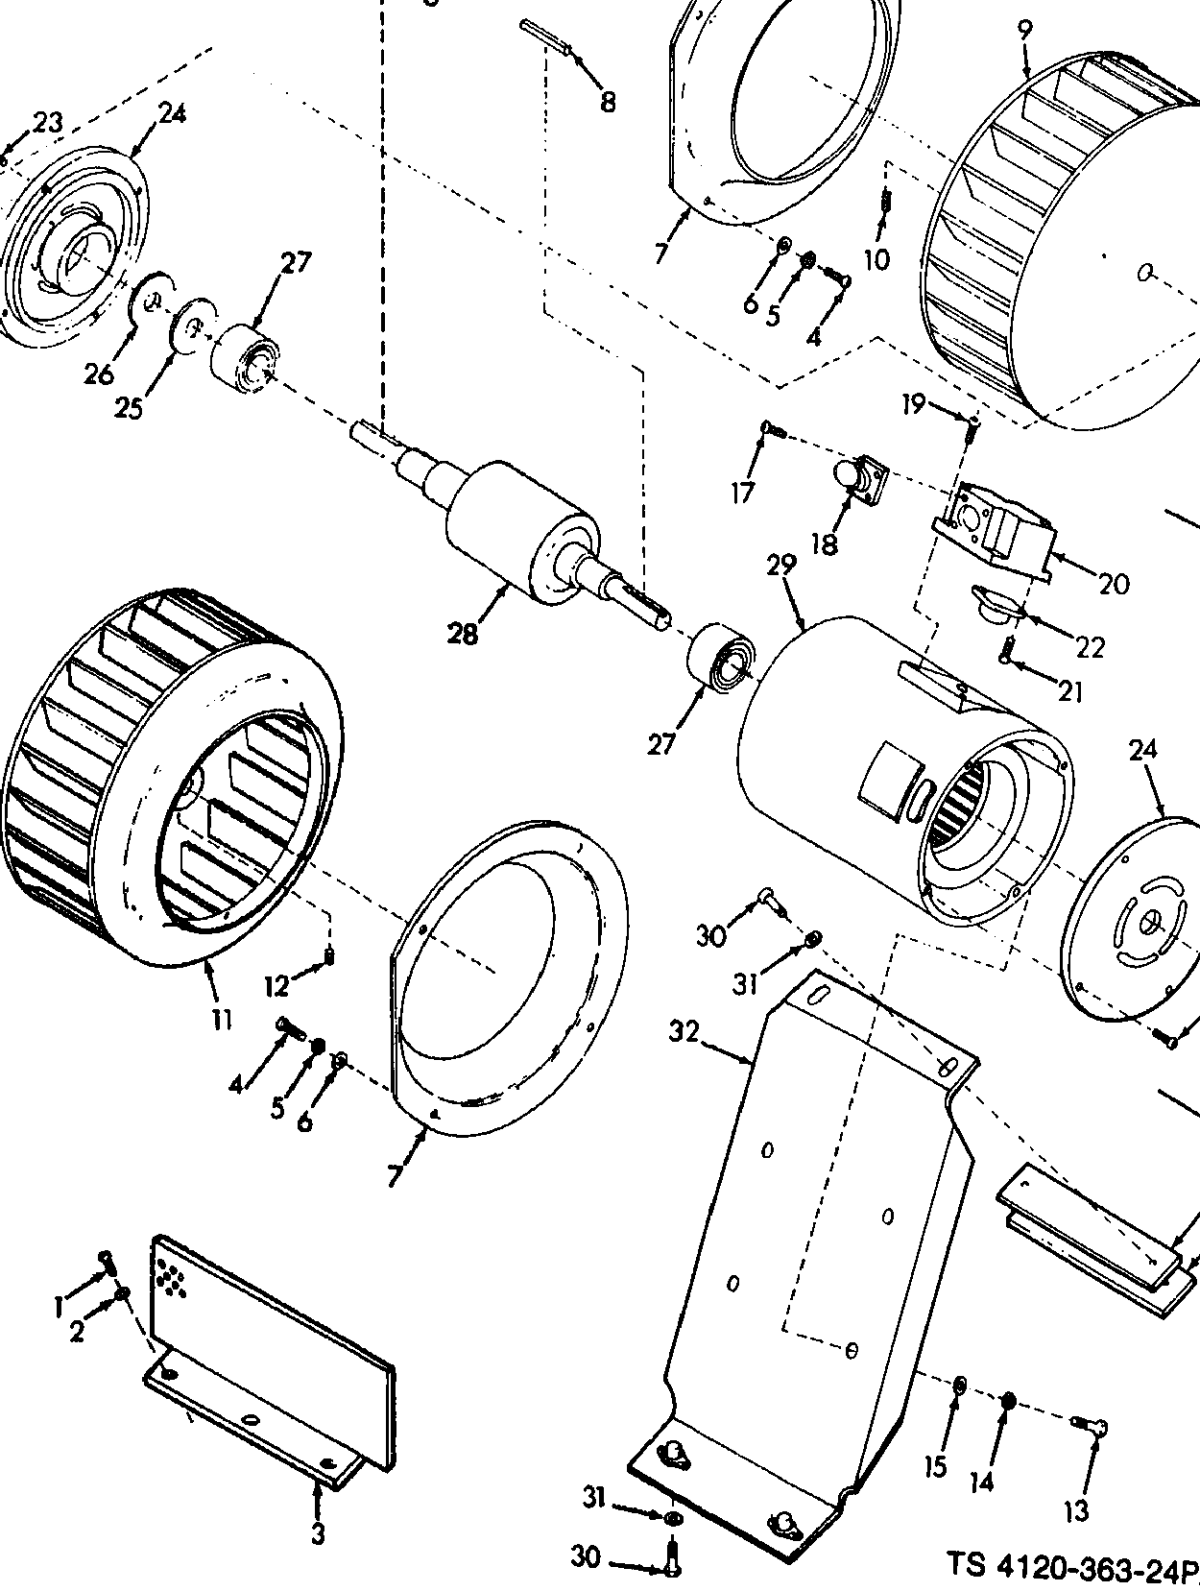


NATION		SMR CODE	NATIONAL STOCK NUMBER	FSCM	PART NUMBER	DESCRIPTION	USABLE ON CODE	U/N
IDI	ITEM NO							
						GROUP 04 EVAPORATOR FANS, MOTOR AND HEATERS		
1	PAJZZ	5305-00-989-7435	96906	MS35207-264	SCREW, MACHINE.....	EA		
2	PAJZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT.....	EA		
3	XBZZZ		97403	13214E3973	BAFFLE, EVAP FAN.....	EA		
4	PAJZZ	5305-00-984-6194	96906	MS35206-246	SCREW, MACHINE.....	EA		
5	PAJZZ	5310-00-809-8544	96906	MS27183-7	WASHER, FLAT.....	EA		
6	PAJZZ	5310-00-809-4058	96906	MS27183-10	WASHER, FLAT.....	EA		
7	XBZZZ		97403	13214E3993	RING, INLET, EVAP FAN.....	EA		
8	PAJZZ	5315-00-730-4572	96906	MS20066-146	KEY, MACHINE.....	EA		
9	XBZZZ		97403	13214E4001	IMPELLER, FAN CNTFGL.....	EA		
10	PAJZZ	5305-01-082-2739	97403	13216E4535	.SETSCREW CUP POINT.....	EA		
11	XBZZZ		97403	13214E4002	IMPELLER, FAN CNTFGL.....	EA		
12	PAJZZ	5305-01-082-2739	97403	13216E4535	.SETSCREW CUP POINT.....	EA		
13	PAJZZ	5306-00-225-8497	96906	MS90725-32	BOLT, MACHINE.....	EA		
14	PAJZZ	5310-00-407-9566	96906	MS35338-45	WASHER, LOCK.....	EA		
15	PAJZZ	5310-00-081-4219	96906	MS27183-12	WASHER, FLAT.....	EA		
16	PAJFF	6105-00-253-5520	64731	4715-28	MOTOR, ALTERNATING CURRENT.....	EA		
17	PAFZZ	5305-00-726-1241	96906	MS21090-0412	.SCREW, SELF-LOCKING.....	EA		
18	PAFZZ	5935-00-801-6616	96906	MS3102R14S-TP	.CONNECTOR RCPT REC.....	EA		
19	PAFZZ	5305-01-099-3149	96906	MS21090-0632	.SCREW, SELF LOCKING.....	EA		
20	XBZZZ		64731	02-009315-001	.BOX TERMINAL.....	EA		
21	PAFZZ	5305-00-984-6151	96906	MS35206-243	.SCREW, MACHINE.....	EA		
22	XBZZZ		64731	01-008773-014	.PROTECTOR, OVERLOAD.....	EA		
23	PAFZZ	5305-00-116-1469	96906	MS21090-352	.SCREW, SELF-LOCKING.....	EA		
24	XBZZZ		64731	02-009312-000	.END BELL.....	EA		
25	PAFZZ	5365-00-938-2083	64731	01-006424-008	.SHIM.....	EA		
26	XBZZZ	5999-01-088-2703	64731	01-006189-012	.SPRING, BEARING.....	EA		
27	PAFZZ	3110-00-124-5076	64731	02-010999-202	.BEARING, BALL, ANNULAR.....	EA		
28	XBZZZ		64731	02-011488-002	.ROTOR AND SHAFT.....	EA		
29	KAFZZ		64731	02-011488-001	.FRAME AND STATOR.....	EA		
30	PAJZZ	5306-00-225-9089	96906	MS90726-34	BOLT, MACHINE.....	EA		
31	PAJZZ	5310-00-081-4219	96906	MS27183-12	WASHER, FLAT.....	EA		
32	XBZZZ		97403	13214E3964	BRACKET, MOTOR EVAPORATOR FAN.....	EA		
33	XBZZZ		97403	13214E3858-1	SHIM, MOTOR BRACKET.....	EA		
34	XBZZZ		97403	13214E3858-2	SHIM, MOTOR BRACKET.....	EA		

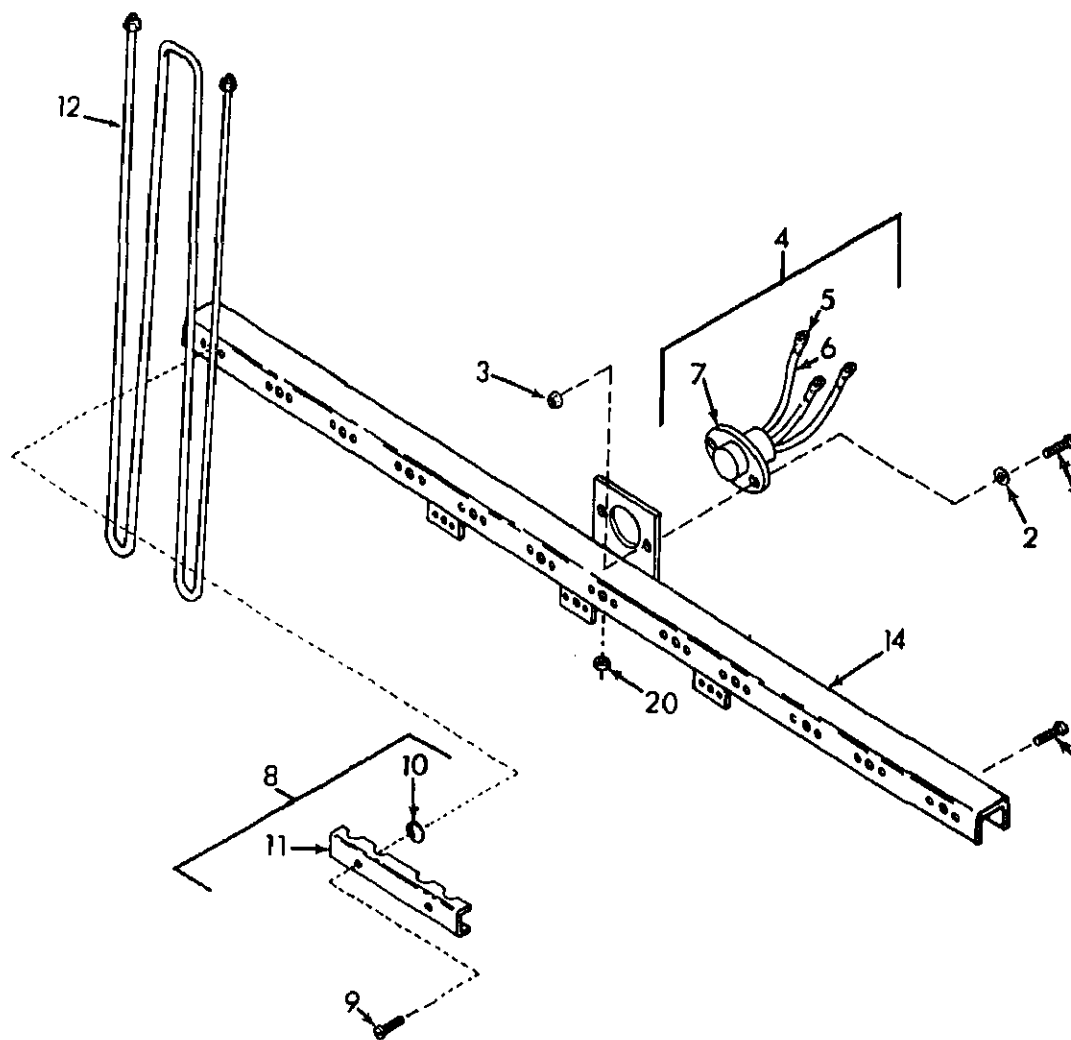

TS 4120-363-24P/1

Figure 14. Heaters and Related Parts


2	PAOZZ	5310-00-809-8344	96906	MS27183-7	WASHER,FLAT.....
3	PAOZZ	5310-00-889-2549	96906	MS21045-08	NUT,SELF-LOCKING.....
4	XBOOO		97403	13214E4316-2	WIRING ASSEMBLY THERMOSTAT HEATER.....
5	PAOZZ	5940-00-143-4794	96906	MS25036-112	.TERMINAL,LUG.....
6	MOOOO		97403	13214E4316/3	.WIRE,ELECTRICAL,12 AWG,MPD FROM M5086/1-12-9.....
7	PAOZZ	5930-00-498-5895	82647	CWA1249	.SWITCH,THERMOSTATIC.....
8	XBOZZ		97403	13214E4072-1	CHANNEL,HEATER MTG.....
9	PAOZZ	5305-01-096-5603	94222	12-11-703-12	.SCREW,PANEL FASTENER.....
10	PAOZZ	5310-00-880-9344	94222	12-11014-12	.WASHER,LOCK.....
11	XBOZZ		97403	13214E4072-1-1	.CHANNEL.....
12	PAOZZ	4540-00-488-8617	97403	13214E3981	HEATING ELEMENT,ELECTRICAL.....
13	PAOZZ	5305-00-989-7435	96906	MS35207-264	SCREW,MACHINE.....
14	XBOZZ		97403	13214E3951	BRACKET,HEATER UPR.....

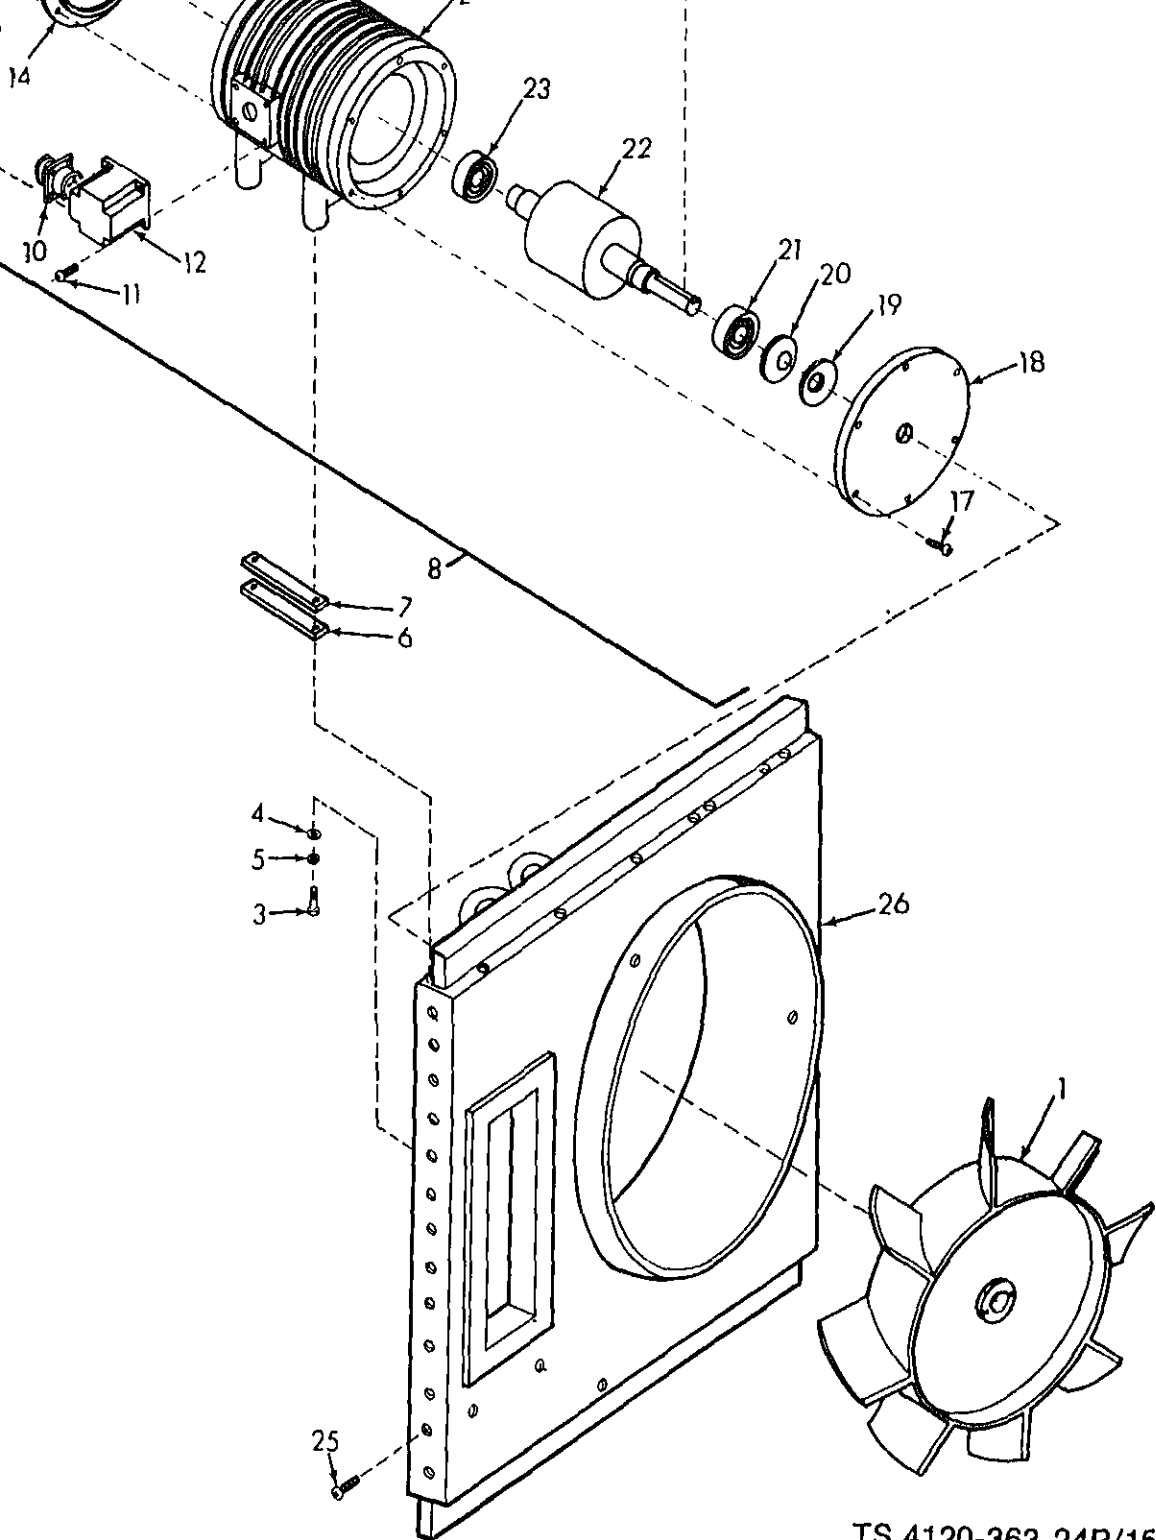

TS 4120-363-24P/15

Figure 15. Condenser Fan Motor and Back Panel Assembly


NR DE	NATIONAL STOCK NUMBER	FSCM	PART NUMBER	USABLE ON CODE	U/M	QTY INC IN UNIT
				GROUP 05 CONDENSOR FAN MOTOR AND BACK PANEL ASSEMBLY		
22		97403	13214E4003	IMPELLER, FAN, AXLE.....	EA	1
22	5315-00-730-4577	96906	MS20066-147	KEY, MACHINE.....	EA	1
22	5305-00-225-9091	96906	MS90726-36	SCREW, CAP, HEXAGON.....	EA	4
22	5310-00-407-5566	96906	MS35338-45	WASHER, LOCK.....	EA	4
22	5310-00-081-4219	96906	MS27183-12	WASHER, FLAT.....	EA	4
22		97403	13214E3858-3	SHIM, CONDENSER FAN MOTOR.....	EA	1
22		97403	13214E3858-4	SHIM, CONDENSER FAN MOTOR.....	EA	1
FF	6105-00-413-4448	64731	7029-6	MOTOR, CONDENSER, CURRENT.....	EA	1
22		96906	MS21090-52	SCREW, SELF-LOCKING.....	EA	12
22	5935-00-806-4588	96906	MS3102816-10P	CONNECTOR, RECEPTACLE.....	EA	1
22		96906	MS21090-32	SCREW, SELF LOCKING.....	EA	4
22		64731	02-009242-001	BOX, TERMINAL.....	EA	1
22		96906	MS21090-52	SCREW, SELF-LOCKING.....	EA	4
22		64731	02-009923-000	END BELL, REAR.....	EA	1
22		96906	MS35206-52	SCREW, MACH PAN HD.....	EA	2
22		64731	01-008773-040	PROTECTOR, OVERLOAD.....	EA	1
22		96906	MS21090-52	SCREW, SELF-LOCKING.....	EA	6
22		64731	02-009922-000	END BELL, FRONT.....	EA	1
22		64731	01-006189-003	SPRING, BEARING LOADING.....	EA	1
22		64731	01-006424-012	SPACER, BEARING.....	EA	1
22	3110-00-133-1940	64731	02-010999-204	BEARING, FRONT.....	EA	1
22		64731	02-011498-002	ROTOR AND SHAFT.....	EA	1
22		64731	02-010999-20L	BEARING, REAR.....	EA	1
22		64731	02-011498-001	FRAME AND STATOR.....	EA	1
22	5305-00-984-6154	96906	MS35206-246	SCREW, MACHINE.....	EA	18
22		97403	13217E6827	BRACKET, MOTOR MOUNT.....	EA	1

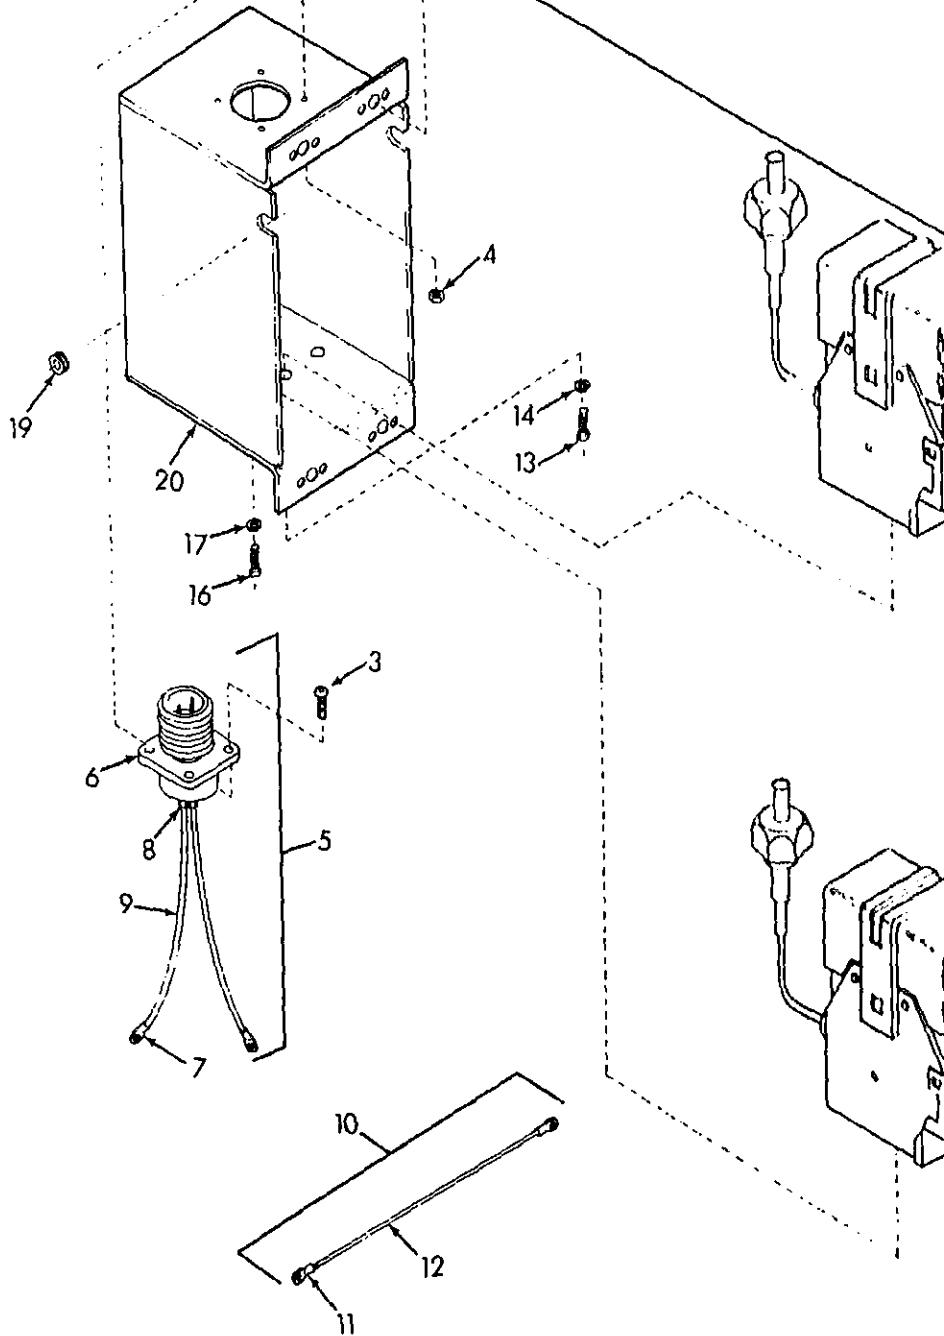

TS 4

Figure 16.. High and Low Pressure Switch Assembly

2	XBFZZ		97403	13216E4523	SWITCH ASSEMBLY,PRESSURE.....	EA
3	PAFZZ	5305-00-889-2999	96906	M535206-217	.SCREW,MACHINE.....	EA
4	PAFZZ	5310-00-088-0551	96906	M521044N04	.NUT,SELF-LOCKING.....	EA
5	XBFFF		97403	13216E4522	.WIRING HARNESS.....	EA
6	XBFZZ		96906	M53102R12S-3PY	..CONNECTOR,RECEPTACLE ELECTRIC,BOX MTD.....	EA
7	PAFZZ	5940-00-143-4774	96906	M525036-153	..TERMINAL,LUG.....	EA
8	HPFFF		81349	MIL-I-23053/5-CL-1-125ID	..INSULATION SLEEVING, 0.125 ID X 1.00 L,MFD FROM MIL-I-23053/5 CL-1	EA
9	HPFFF		97403	13216E4522/3	..WIRE,ELECTRICAL, 16 AWG,MFD FROM M5086/1-16-9.....	EA
10	XBFFF		97403	13210E9958-11	.LEAD ELECTRICAL.....	EA
11	PAFZZ	5940-00-143-4774	96906	M525036-153	..TERMINAL,LUG.....	EA
12	HPFFF		97403	13210E9958/3	..WIRE,ELECTRICAL, 16 AWG,MFD FROM M5086/1-16-9.....	EA
13	PAFZZ	5305-00-984-4584	96906	M535206-227	.SCREW,MACHINE.....	EA
14	PAFZZ	5310-00-049-4C07	96906	M535338-41	.WASHER,LOCK.....	EA
15	PAFZZ	5930-00-911-9095	50831	P208A-22	.SWITCH,PRESSURE.....	EA
16	PAFZZ	5305-00-984-4584	96906	M535206-227	.SCREW,MACHINE.....	EA
17	PAFZZ	5310-00-049-4C07	96906	M535338-41	.WASHER,LOCK.....	EA
18	PAFZZ	5930-00-275-7800	50831	P200A-72	.SWITCH,PRESSURE, CUT-OUT.....	EA
19	PAFZZ	5325-00-286-6C47	96906	M535489-1	.GROMMET,NONMETALLIC.....	EA
20	XBFZZ		97403	13216E4528	.ENCLOSURE,PRESSURE SWITCH.....	EA

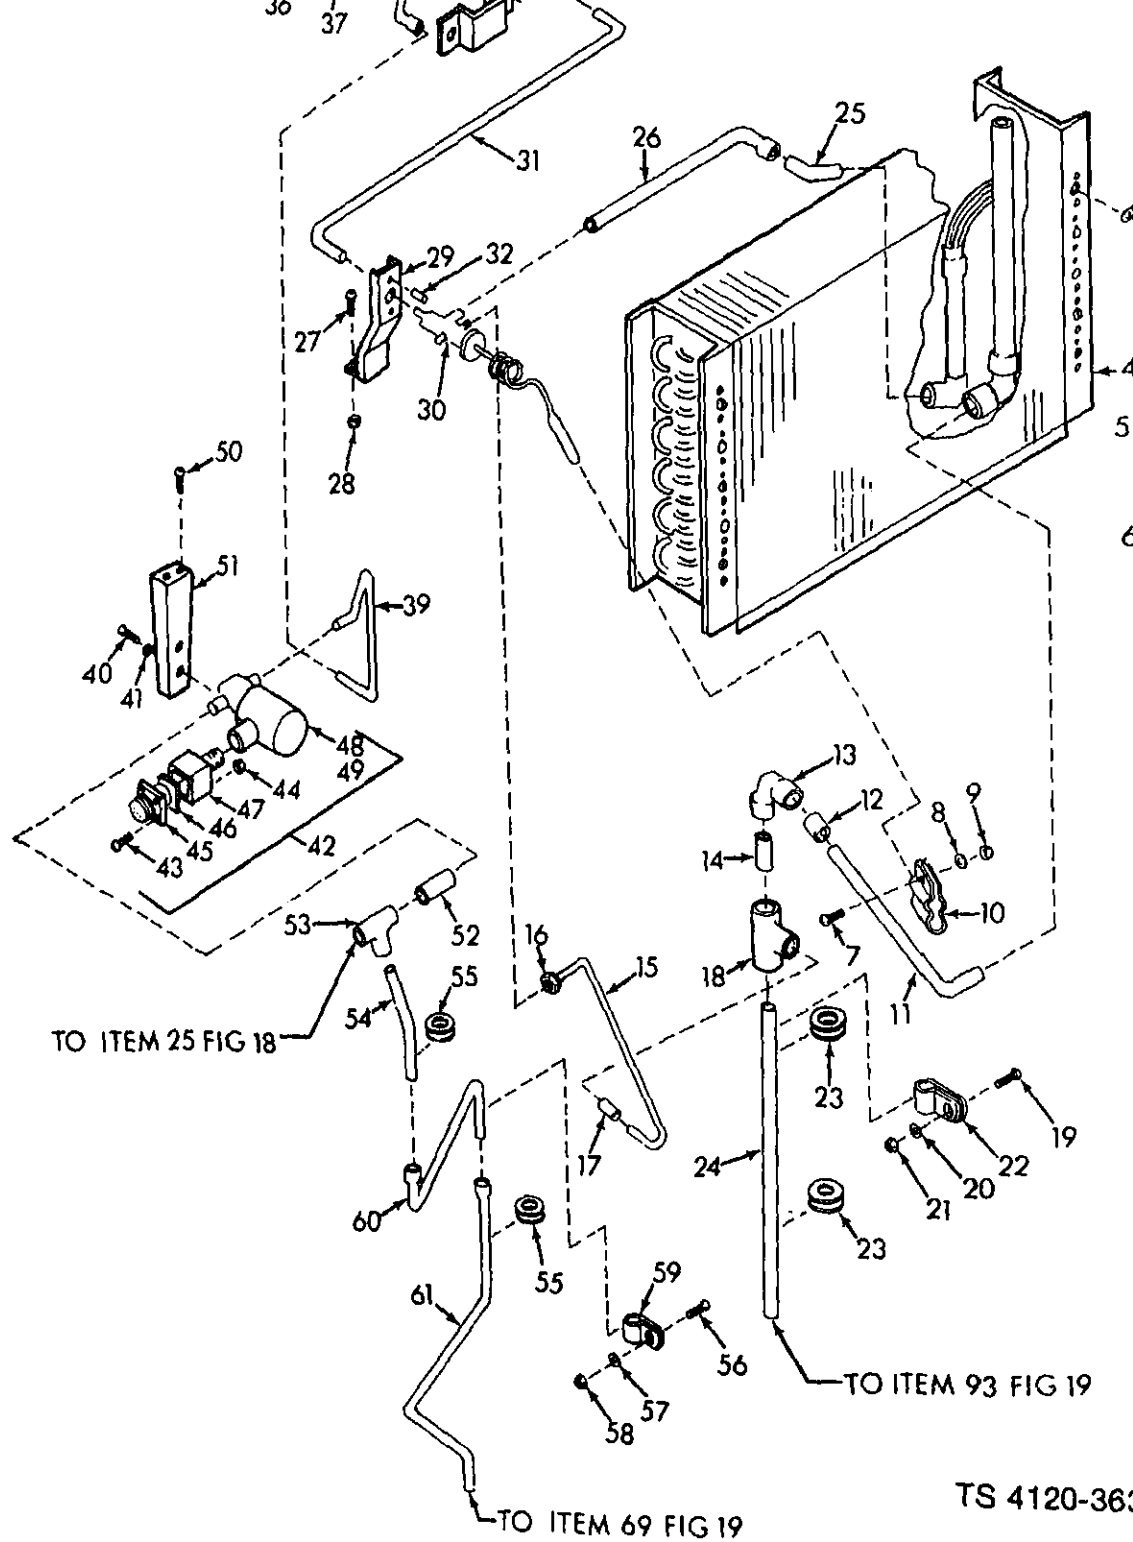


TS 4120-363

Figure 17. Evaporator Coil and Related Piping

17	2	PAFZZ	5310-00-045-3296	96906	MS35338-43	WASHER, LOCK.....
17	3	PAFZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT.....
17	4	XBFZZ		97403	13214E3983	COIL, EVAPORATOR.....
17	5	PAFZZ	5320-00-932-1572	97403	13214E3789-2	RIVET, BLIND.....
17	6	XBFZZ		97403	13216E4541	BLOCK-OFF.....
17	7	PAFZZ	5305-00-989-7435	96906	MS35207-264	SCREW, MACHINE.....
17	8	PAFZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT.....
17	9	PAFZZ	5310-00-061-7326	96906	MS21045-3	NUT, SELF-LOCKING.....
17	10	XBFZZ		97403	13216E8038-5	CLAMP, LOOP.....
17	11	MFFFF		97403	13217E6896/250	TUBE, COPPER MFD FROM P/N ASTM-B280, .750 OD X .035 WALL.....
17	12	PAFZZ	4130-00-922-6515	41947	W1725	BUSHING, FLUSH.....
17	13	PAFZZ	4730-00-254-6447	96906	MS35917-7	ELBOW, TUBE.....
17	14	MFFFF		97403	13217E6896/302	TUBE, COPPER MFD FROM P/N ASTM-B280, .875 OD X .042 WALL.....
17	15	MFFFF		97403	13217E6896/218	TUBE, COPPER MFD FROM P/N ASTM-B280, .250 OD X .030 WALL.....
17	16	PAFZZ	4730-00-189-2737	96906	MS35872-2	NUT, TUBE COUPLING.....
17	17	PAFZZ	4730-00-905-4268	41947	W1714	REDUCER, TUBE.....
17	18	PAFZZ	4730-00-596-4062	41947	W4034	TEE, TUBE.....
17	19	PAFZZ	5305-00-995-3444	96906	MS35207-266	SCREW, MACHINE.....
17	20	PAFZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT.....
17	21	PAFZZ	5310-00-061-7326	96906	MS21045-3	NUT, SELF-LOCKING.....
17	22	XBFZZ	5340-00-106-0553	96906	MS21104D14	CLAMP, LOOP.....
17	23	PAFZZ	5325-00-270-8890	96906	MS35489-22	GROMMET, RUBBER.....
17	24	MFFFF		97403	13217E6896/254	TUBE, COPPER.....
17	25	MFFFF		97403	13217E6896/241	TUBE, COPPER MFD FROM P/N ASTM-B280, .625 OD X .035 WALL.....
17	26	MFFFF		97403	13217E6896-232	TUBE, COPPER MFD FROM P/N ASTM-B280, .625 OD X .035 WALL.....
17	27	PAFZZ	5305-00-984-6154	96906	MS35206-246	SCREW, MACHINE.....
17	28	PAFZZ	5310-00-889-2549	96906	MS21045-08	NUT, SELF-LOCKING.....
17	29	XBFZZ		97403	13214E4078	BRACKET, EXPANSION VALVE.....
17	30	PAFZZ		70255	TCLEB5HW90	VALVE, EXPANSION.....
17	31	MFFFF		97403	13217E6896/236	TUBE, COPPER MFD FROM P/N ASTM-B280, .500 OD X .032 WALL.....
17	32	XBFZZ		97403	13214E4084	SPACER.....
17	33	PAFZZ	5305-00-984-6154	96906	MS35206-246	SCREW, MACHINE.....
17	34	PAFZZ	5310-00-809-8546	96906	MS27183-7	WASHER, FLAT.....
17	35	XBFZZ		97403	13216E4536	BRACKET, SIGHT GLASS.....
17	36	XBFZZ		97403	13211E8242	SPACER, SIGHT GLASS.....
17	37	PAFZZ	5330-00-409-3350	97403	13211E8255	GASKET.....
17	38	PAFZZ	6680-00-111-5200	78462	SA-K16	INDICATOR, SIGHT LIQ.....
17	39	MFFFF		97403	13217E6896/217	TUBE, COPPER MFD FROM P/N ASTM-B280, .500 OD X .032 WALL.....
17	40	PAFZZ	5305-00-984-6193	96906	MS35206-245	SCREW, MACHINE.....

17	43	PAFFZ	5305-00-984-4579	96906	MS35206-222	SCREW, MACHINE.....
17	44	PAFZZ	5310-00-082-0591	96906	MS21044N04	NUT, SELF-LOCKING.....
17	45	PAFZZ	5935-00-801-6615	96906	MS3102R-125-3P	CONNECTOR, RECEPTACLE, BOX MTC.....
17	46	PAFZZ	5330-00-079-7838	96906	MS5100T-3	GASKET.....
17	47	XBFZZ		97403	13214E0696-3	ADAPTER.....
17	48	PAFZZ	4810-00-762-4463	93781	08241	VALVE, SOLENOID.....
17	49	PAFZZ	5950-00-929-7870	93781	3MP-23	COIL, ELECTRICAL VALVE.....
17	50	PAFZZ	5305-00-989-7435	96906	MS3520T-264	SCREW, MACHINE.....
17	51	XBFZZ		97403	13214E4077	BRACKET, SOLENOID VALVE.....
17	52	HFFFF		97403	13217E6896/215	TUBE, COPPER MPD FROM ASTM-A280, .900 OD X .012 WALL.....
17	53	PAFZZ	4730-00-203-4522	41947	W4002	TEE, TUBE.....
17	54	HFFFF		97403	13217E6896/220	TUBE, COPPER MPD FROM ASTM-A280, .375 OD X .012 WALL.....
17	55	PAFZZ	5325-00-291-9366	96906	MS35489-11	GROMMET, RUBBER.....
17	56	PAFZZ	5305-00-995-3444	96906	MS3520T-266	SCREW, MACHINE.....
17	57	PAFZZ	5310-00-809-8546	96906	MS27183-8	WASHER, FLAT.....
17	58	PAFZZ	5310-00-061-7326	96906	MS21045-3	NUT, SELF-LOCKING.....
17	59	PAFZZ		96906	MS2110406	CLAMP, LOOP.....
17	60	HFFFF		97403	13217E6896/221	TUBE, COPPER MPD FROM ASTM-A280, .375 OD X .012 WALL.....
17	61	HFFFF		97403	13217E6896/255	TUBE, COPPER MPD FROM ASTM-A280, .375 OD X .012 WALL.....

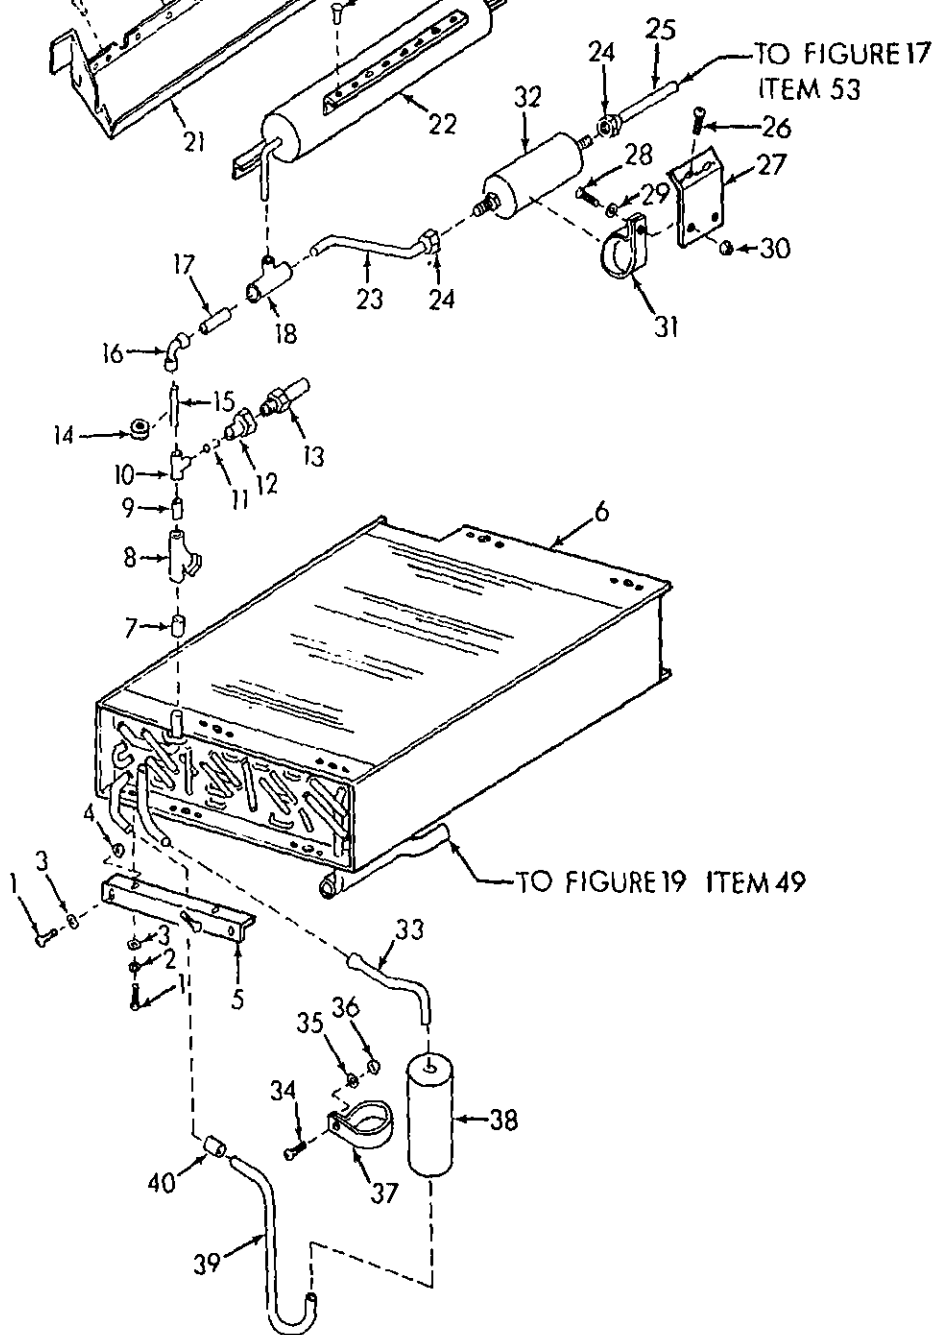


TS 4120-363-24

Figure 18. Condenser Coil and Related Piping

12	PAFZZ	4730-01-096-5126	96906	MS35921-3-2F
13	PAFZZ	4820-00-073-8405	98939	C1503-01
14	PAFZZ	5325-00-276-6100	96906	MS35489-14
15	MFFFF		97403	13217E6896/207
16	PAFZZ	4730-00-254-6449	96906	MS35917-4
17	MFFFF		97403	13217E6896/209
18	PAFZZ	4730-00-203-4922	41947	W4002
19	PAFZZ	5320-00-882-8385	07707	A066H
20	PAFZZ	5320-00-420-2165	07707	AK64H
21	XBFZZ		97403	13214E3953
22	XBFZZ		97403	13214E3876
23	MFFFF		97403	13217E6896/211
24	PAFZZ	4730-00-228-0226	96906	MS35872-4
25	MFFFF		97403	13217E6896/214
26	XBFZZ	5305-00-989-7435	96906	MS35207-264
27	XBFZZ		97403	13214E4079
28	PAFZZ	5305-00-995-3444	96906	MS35207-266
29	PAFZZ	5310-00-809-8546	96906	MS27183-8
30	PAFZZ	5310-00-061-7326	96906	MS21045-3
31	XBFZZ		96906	MS21104046
32	PAFZZ	4130-00-574-1916	78462	C-164
33	MFFFF		97403	13217E6896/183
34	PAFZZ	5305-00-995-3444	96906	MS35207-266
35	PAFZZ	5310-00-809-8546	96906	MS27183-8
36	PAFZZ	5310-00-061-7326	96906	MS21045-3
37	XBFZZ	5340-00-158-4187	96906	MS21104050
38	XBFZZ		97403	13214E4028
39	MFFFF		97403	13217E6896/180
40	PAFZZ	4730-00-278-6178	96906	MS35923-3

ADAPTER, STRAIGHT, PIPE.....
VALVE, SAFETY RELIEF.....
GROMMET, RUBBER.....
TUBE, COPPER MFD FROM ASTM-B280 .500 OD X .032 WALL.....
ELBOW, TUBE.....
TUBE, COPPER MFD FROM ASTM-B280 .500 OD X .032 WALL.....
TEE, TUBE.....
RIVET, BLIND.....
RIVET, BLIND.....
BAFFEL, TANK.....
TANK.....
TUBE, COPPER MFD FROM ASTM-B280 .500 OD X .032 WALL.....
NUT, TUBE, COUPLING.....
TUBE, COPPER MFD FROM ASTM-B280 .500 OD X .032 WALL.....
SCREW, MACH PAN HD.....
BRACKET, DEHYDRATOR.....
SCREW, MACHINE.....
WASHER, FLAT.....
NUT, SELF-LOCKING, HE.....
CLAMP, LOOP.....
DEHYDRATOR, DESICCANT, REFRIGERANT.....
TUBE, COPPER MFD FROM ASTM-B280 .500 OD X .032 WALL.....
SCREW, MACHINE.....
WASHER, FLAT.....
NUT, SELF-LOCKING, HE.....
CLAMP, LOOP.....
RECEIVER, RFGT.....
TUBE, COPPER MFD FROM ASTM-B280 .500 OD X .032 WALL.....
REDUCER, TUBE.....

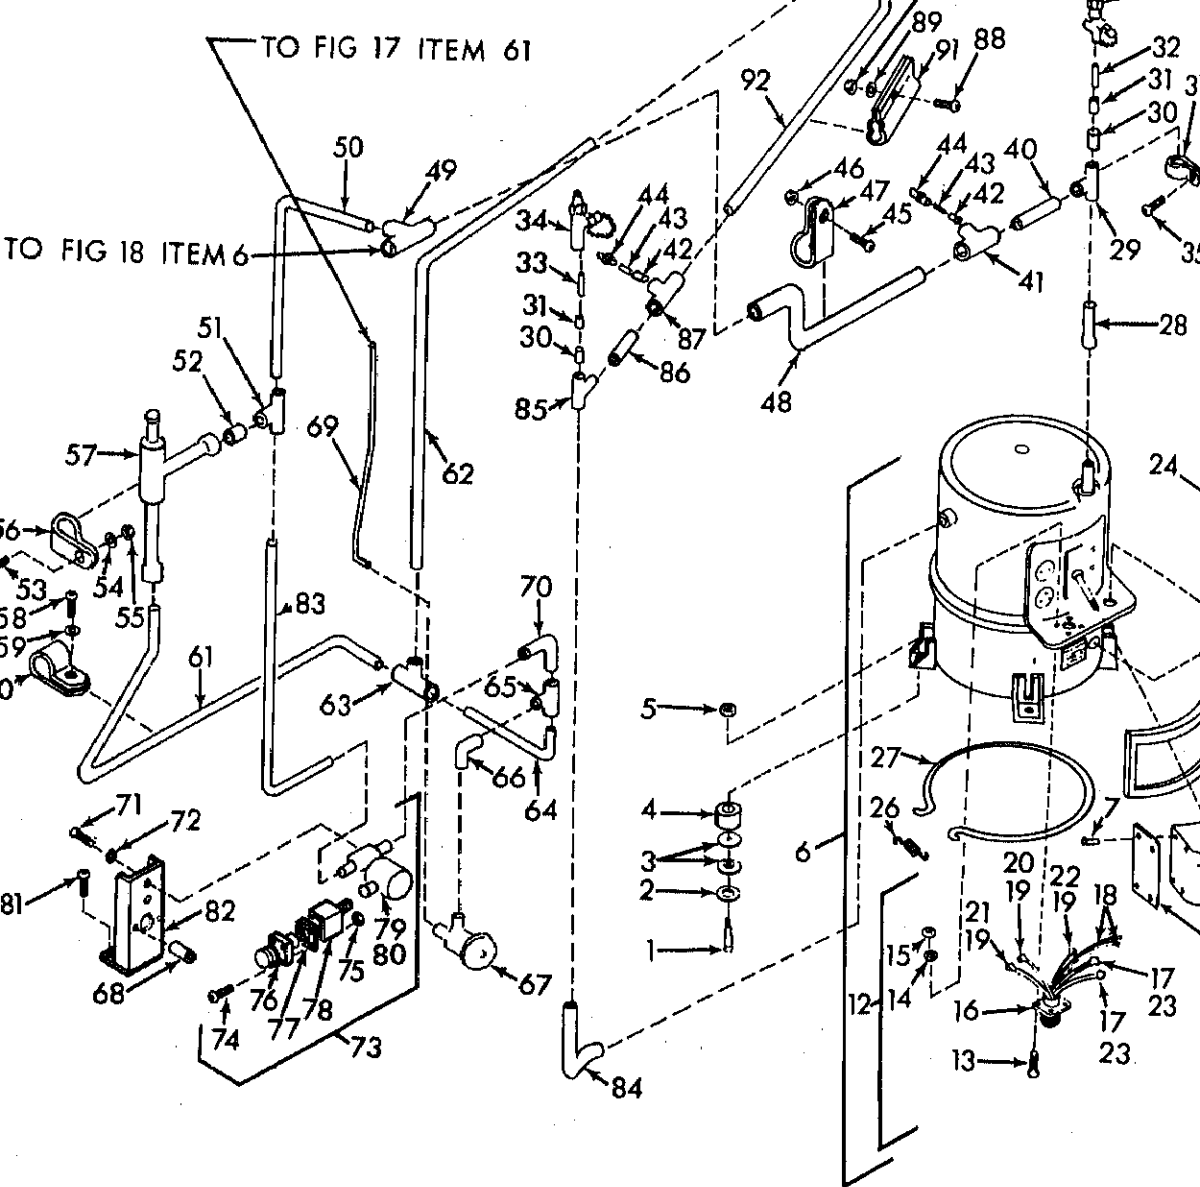

TS 4120-363-2

Figure 19. Compressor and Related Piping

XBFZZ	5306-01-096-2430	97403	13214E3932-1	BOLT, SHOULDER.....	FA
XBFZZ		97403	13211E8165-1	WASHER.....	FA
XBFZZ	5310-00-401-2345	97403	13211E8170	WASHER, SMOULDERED.....	FA
XBFZZ		97403	13214E3933	SPACER.....	FA
XBFZZ	5310-00-829-5581	96906	MS35649-2312	NUT, PLAIN, HEXAGON.....	FA
PAFZZ		10855	CA422H-36-208-3	COMPRESSOR, REFRIGERATING, PMR DRVN.....	FA
XBFZZ		10855	76HC231-1152-2	.RIVET.....	FA
XBFZZ		10855	76HC231-1033-23	.NAMEPLATE.....	FA
XBFZZ		10855	AT25 JA171	.NUT, PLAIN WING.....	FA
XBFZZ		10855	2RG52410	.COVER, TERMINAL BOX.....	FA
XBFZZ		10855	7RG51688	.GASKET.....	FA
XBFZZ		10855	76HC232-144-2	.WIRE KIT.....	FA
XBFZZ	5305-00-889-3000	96906	MS35206-230	..SCREW, MACHINE.....	FA
XBFZZ		96906	MS35338-22	..WASHER, LOCK, SPRING.....	FA
XBFZZ	5310-00-934-9747	96906	MS35649-62	..NUT, PLAIN, HEXAGON.....	FA
XBFZZ	5935-00-847-0568	96906	MS3102R24-11 P	..CONNECTOR, RECEPTACLE.....	FA
XBFZZ		10855	LF33MM013	..SLEEVE (INTERNAL THERMOSTAT).....	FA
XBFZZ		10855	LF33PM016	..SLEEVE (HEATER).....	FA
XBFZZ		10855	LF33MM017	..SLEEVE (POWER).....	FA
XBFZZ		10855	99WJ0351GC300510	..LEAD (COMMON).....	FA
XBFZZ		10855	99WJ0351GC300410	..LEAD (RUN).....	FA
XBFZZ		10855	99WA0351GC300510	..LEAD (START).....	FA
XBFZZ		10855	99W00354TC200516	..LEAD (INTERNAL THERMOSTAT).....	FA
XBFZZ		10855	7RA5214A	.GROMMET.....	FA
XBFZZ		10855	3RG5163B	.THERMOSTAT, HEATER.....	FA
XBFZZ		10855	2RA5049A	.SPRING, HEATER.....	FA
XBFZZ	4130-01-098-0315	10855	HT32A2223	.HEATER, CRANKCASE.....	FA
FFFFF		97403	13217E6896/304	TUBE, COPPER, MFD FROM ASTM-B280, .625 OD X .035 WALL.....	FA
PAFZZ	4730-00-615-5674	41947	W4Q29	TEE.....	FA
PAFZZ	4730-00-622-1277	41947	W1715	REDUCER, TUBE.....	FA
PAFZZ	4730-00-905-4268	41947	W1714	REDUCER, TUBE.....	FA
FFFFF		97403	13217E6896/309	TUBE, COPPER, MFD FROM ASTM-B280, .250 OD X .030 WALL.....	FA
FFFFF		97403	13217E6896/310	TUBE, COPPER, MFD FROM ASTM-B280, .250 OD X .030 WALL.....	FA
PAFZZ	4820-00-501-7089	58553	61TA-454	VALVE, ANGLE.....	FA
PAFZZ	5305-00-989-7435	96906	MS35207-264	SCREW, MACHINE.....	FA
PAFZZ	5310-00-061-7326	96906	MS21045-3	NUT, SELF-LOCKING.....	FA
XBFZZ	5340-00-251-0271	96906	MS21104011	CLAMP, LOOP.....	FA
PAFZZ	5320-00-117-6828	96906	MS20470AD4-6	RIVET, SOLID.....	LB
XBFZZ		97403	13217E5402	SUPPORT, TUBE.....	FA
FFFFF		97403	13217E6896/290	TUBE, COPPER, MFD FROM ASTM-B280 .750 OD X .042 WALL.....	FA

19	43	MFFFF		97403	13217E6896/258	TUBE,COPPER MPD FROM ASTM-B280 .250 OD X .030 WALL.....
19	44	PAF22	4730-01-037-4519	96906	MS35919-22	COUPLING,TUBE.....
19	45	PAF22	5305-00-995-3444	96906	MS35207-266	SCREW,MACHINE.....
19	46	PAF22	5310-00-061-7326	96906	MS21045-3	NUT,SELF-LOCKING.....
19	47	XBF22	5340-00-106-0552	96906	MS21104012	CLAMP,LOOP.....
19	48	MFFFF		97403	13217E6896/222	TUBE,COPPER MPD FROM ASTM-B280 .250 OD X .030 WALL.....
19	49	PAF22	4730-00-815-5686	41947	W4018	TEE.....
19	50	MFFFF		97403	13217E6896/198	TUBE,COPPER MPD FROM ASTM-B280 .625 OD X .035 WALL.....
19	51	PAF22	4730-00-263-6469	41947	W4039	TEE,TUBE.....
19	52	MFFFF		94103	13217E6896/195	TUBE,COPPER MPD FROM ASTM-B280 .625 OD X .035 WALL.....
19	53	PAF22	5305-00-995-3444	96906	MS35207-266	SCREW,MACHINE.....
19	54	PAF22	5310-00-809-8546	96906	MS21183-8	WASHER,FLAT.....
19	55	PAF22	5310-00-061-7326	96906	MS21045-3	NUT,SELF-LOCKING.....
19	56	XBF22	5340-00-251-8286	96906	MS21104020	CLAMP,LOOP.....
19	57	PAF22	4820-00-909-3717	97403	13211E3800	VALVE,PRESSURE REGULATING.....
19	58	PAF22	5305-00-995-3444	96906	MS35207-266	SCREW,MACHINE.....
19	59	PAF22	5310-00-809-8546	96906	MS21183-8	WASHER,FLAT.....
19	60	XBF22	5340-00-106-0551	96906	MS21104010	CLAMP,LOOP.....
19	61	MFFFF		97403	13217E6896/194	TUBE,COPPER MPD FROM ASTM-B280 .625 OD X .035 WALL.....
19	62	MFFFF		97403	13217E6896/179	TUBE,COPPER MPD FROM ASTM-B280 .625 OD X .035 WALL.....
19	63	PAF22	4730-00-263-6469	41947	W4029	TEE,TUBE.....
19	64	MFFFF		97403	13217E6896/176	TUBE,COPPER MPD FROM ASTM-B280 .500 OD X .032 WALL.....
19	65	PAF22	4730-00-263-6465	96906	MS35929-4	TEE,TUBE.....
19	66	MFFFF		97403	13217E6896/191	TUBE,COPPER MPD FROM ASTM-B280 .500 OD X .032 WALL.....
19	67	PAF22	4820-01-053-5372	70255	LC12A	VALVE,QUENCH.....
19	68	XBF22		97403	13214E4084	SPACER,VALVE.....
19	69	MFFFF		97403	13217E6896/178	TUBE,COPPER MPD FROM ASTM-B280 .375 OD X .032 WALL.....
19	70	MFFFF		97403	13217E6896/230	TUBE,COPPER MPD FROM ASTM-B280 .500 OD X .032 WALL.....
19	71	PAF22	5305-00-984-6193	96906	MS35206-245	SCREW,MACHINE.....
19	72	PAF22	5310-00-045-3299	96906	MS35338-42	WASHER,LOCK.....
19	73	XBF22		97403	13214E4224-3	WIRING ASSY,VALVE SOLENOID.....
19	74	PAF22	5305-00-984-4979	96906	MS35206-222	SCREW,MACHINE.....
19	75	PAF22	5310-00-088-0551	96906	MS21044N04	NUT,SELF-LOCKING.....
19	76	PAF22	5935-00-801-6615	96906	MS3102R-125-3P	CONNECTOR,RECEPTACLE,80X MTG.....
19	77	PAF22	5330-00-019-7838	96906	MS5100T-3	GASKET.....
19	78	XBF22		97403	13214E0696-3	ADAPTER.....
19	79	PAF22	4810-00-762-4463	93781	08241	VALVE,SOLENOID.....
19	80	XBF22	5950-00-929-7870	93781	3MP-23	COIL,ELECTRICAL VALVE.....

83	HFFFF		97403	13217E6896/193	TUBE,COPPER MPD FROM P/N ASTM-B280 .300 OD X .032 WALL.....	FA	1
84	HFFFF		97403	13217E6896/305	TUBE,COPPER MPD FROM P/N ASTM-B280 .875 OD X .045 WALL.....	FA	1
85	PAFZZ	4730-00-263-6460	41947	W4041	TEE.....	FA	1
86	HFFFF		97403	13217E6896/297	TUBE,COPPER MPD FROM P/N ASTM-B280 .875 OD X .045 WALL.....	FA	1
87	PAFZZ	4730-00-596-4062	41947	W4034	TEE,TUBE.....	FA	1
88	PAFZZ	5305-00-969-7435	96906	MS35207-264	SCREW,MACHINE.....	FA	8
89	PAFZZ	5310-00-809-8546	96906	MS27183-8	WASHER,FLAT.....	FA	8
90	PAFZZ	5310-00-041-7326	96906	MS21045-3	NUT,SELF-LOCKING.....	FA	8
91	XBFZZ		97403	13216E8038-3	CLAMP,LOOP.....	FA	1
92	HFFFF		97403	13217E6896/256	TUBE,COPPER MPD FROM P/N ASTM-B280 .875 OD X .045 WALL.....	FA	1
93	PAFZZ	4730-00-263-6462	41947	W4033	TEE.....	FA	1

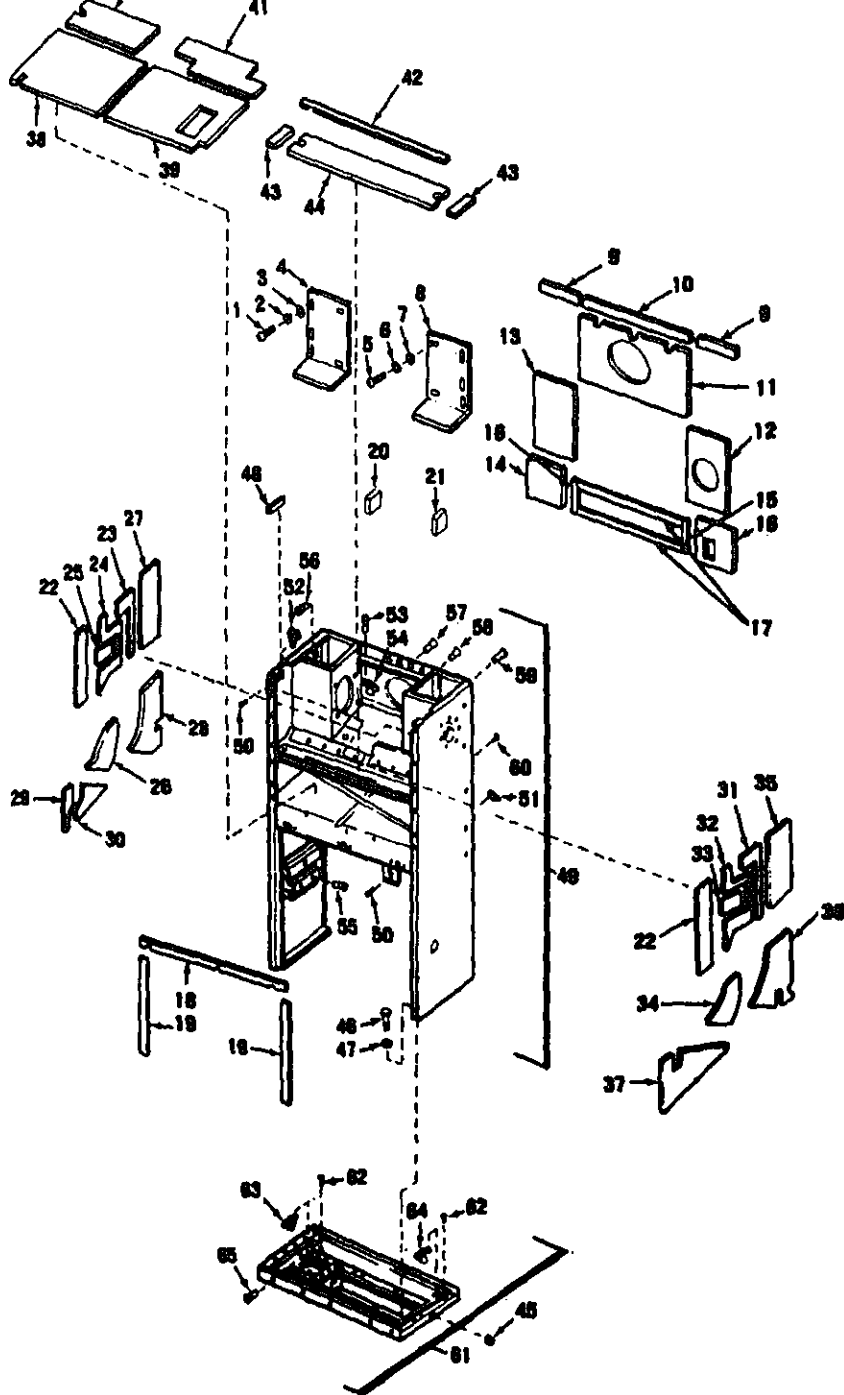


Figure 20. Casing Subassembly and Base

20	2	PAHZZ	5310-00-045-3299	96906	MS35338-42	WASHER, LOCK.....
20	3	PAHZZ	5310-00-809-8544	96906	MS27183-7	WASHER, FLAT.....
20	4	XBNZZ		97403	13214E3947	BAFFLE, LEFT HAND.....
20	5	PAHZZ	5305-00-984-6194	96906	MS35206-246	SCREW, MACHINE.....
20	6	PAHZZ	5310-00-045-3299	96906	MS35338-42	WASHER, LOCK.....
20	7	PAHZZ	5310-00-809-8544	96906	MS27183-7	WASHER, FLAT.....
20	8	XBNZZ		97403	13214E3946	BAFFLE, RIGHT HAND.....
20	9	MHHHH		97403	13217E6896-156	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	10	MHHHH		97403	13217E6896-157	INSULATION SHEET, MFD FROM MIL-I-6896, .50 THICK.....
20	11	MHHHH		97403	13217E6896-158	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	12	MHHHH		97403	13217E6896-159	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	13	MHHHH		97403	13217E6896-155	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	14	MHHHH		97403	13217E6896-154	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	15	MHHHH		97403	13217E6896-160	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	16	MHHHH		97403	13217E6896-152	SEALING STRIP, .125 THK X .31 W X 3.125 L, MFD FROM ASTM-D1056-SBE42CF2.....
20	17	MHHHH		97403	13217E6896-153	SEALING STRIP, .125 THK X .31 W X 17.75 L, MFD FROM ASTM-D1056-SBE42CF2.....
20	18	MHHHH		97403	13217E6896-165	SEALING STRIP, .125 THK X .375 W X 28 L, MFD FROM ASTM-D1056-SBE42CF2.....
20	19	MHHHH		97403	13217E6896-164	SEALING STRIP, .125 THK X .375 W X 25.86 L, MFD FROM ASTM-D1056-SBE42CF2.....
20	20	MHHHH		97403	13217E6896-142	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	21	MHHHH		97403	13217E6896-146	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	22	MHHHH		97403	13217E6896-138	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	23	MHHHH		97403	13217E6896-147	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	24	MHHHH		97403	13217E6896-148	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	25	MHHHH		97403	13217E6896-289	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	26	MHHHH		97403	13217E6896-149	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	27	MHHHH		97403	13217E6896-145	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	28	MHHHH		97403	13217E6896-144	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	29	MHHHH		97403	13217E6896-151	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	30	MHHHH		97403	13217E6896-150	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	31	MHHHH		97403	13217E6896-140	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	32	MHHHH		97403	13217E6896-139	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	33	MHHHH		97403	13217E6896-141	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	34	MHHHH		97403	13217E6896-137	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	35	MHHHH		97403	13217E6896-174	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	36	MHHHH		97403	13217E6896-143	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....
20	37	MHHHH		97403	13217E6896-136	INSULATION SHEET, MFD FROM MIL-I-14511, .50 THICK.....

51	PAHZZ	5310-00-089-6304	97403	13211E8382	.NUT,SHEET SPRING.....	EA
52	PAHZZ	5310-00-138-0104	97403	13216E4538-2	.NUT,SELF-LOCKING,PL.....	EA
53	PAHZZ	5320-00-874-4477	97403	13214E3791-2	.RIVET,BLIND.....	EA
54	PAHZZ		97403	13216E4538-5	.NUT ANCHOR.....	EA
55	PAHZZ	5310-00-269-3466	96906	MS27130S26	.NUT,PLAIN,BLIND RIV.....	EA
56	PAHZZ	5310-01-043-5788	96906	MS27130S13K	.NUT,PLAIN,BLIND RIV.....	EA
57	PAHZZ	5310-00-197-2364	80205	NAS1329S3KB125	.NUT,BLIND RIVET.....	EA
58	PAHZZ		80205	NAS1329S3KB230	.NUT,BLIND RIVET.....	EA
59	PAHZZ		80205	NAS1329S3KB280	.NUT,BLIND RIVET.....	EA
60	PAHZZ	5310-00-852-1115	80205	NAS1329S3KB80	.NUT,PLAIN,BLIND.....	EA
61	XBHHH		97403	13214E3998	PANEL BOTTOM.....	EA
62	PAHZZ	4810-00-433-0763	97403	13214E3791-2	.RIVET,BLIND.....	EA
63	PAHZZ	5310-01-081-9498	97403	13216E4538-3	.NUT,SELF-LOCKING,PL.....	EA
64	PAHZZ	5310-01-083-7192	97403	13216E4538-4	.NUT,SELF-LOCKING,PL.....	EA
65	PAHZZ		80205	NAS1329H06K120	.NUT,BLIND.....	EA

BULK	XDFZZ		81348	QQ-S-571-TYPE-SN 60WRAP2	SOLDER, TIN ALY, LEAD -TIN ALY, LEAD ALY, 1 LB SPOOL.....	LB
BULK	XDFZZ		81348	MMH-A-1617-TYPE- II	ADHESIVE, 1 GAL CAN.....	GL
BULK	PAFZZ	8030-01-040-8549	97403	13211E3465	SEALING COMPOUND.....	GL
BULK	PAFZZ	7510-00-852-8179	81349	MIL-T-22085TYPEI	TAPE, PRESSURE, SENSITIVE.....	XL
BULK	PAFZZ	6830-00-837-9927	81348	BB-F-1421-TYPE22	MONOCHLOROFLUOROM ETHANE, 22 POUND DISPOSABLE CYL.....	LB
BULK	PAFZZ	8040-00-051-0211	81349	MIL-A-46108TYPEI	ADHESIVE-SEALANT, 5 L IODINE, RTV, 90Z TUBE...., ROSE, 5 OZ TUBE....	DZ
BULK	XDFZZ		81348	QQ-B-654-GR-III, IV, OR VI	BRAZING ALLOY.....	LB
BULK	XDFZZ		81348	QQ-B-654-GR-IV O R VI	BRAZING ALLOY.....	LB
BULK	XDFZZ		81348	Q-F-499-TYPE-B	FLUX, 1 GAL CAN.....	GL
BULK	PAFZZ	8030-00-209-8005	81348	YT-S-1732	SEALING COMPOUND OZ TUBE.....	PT
BULK	PAFZZ	4710-00-203-3171	81348	WWT775	TUBE, COPPER .250 OD X .030 WALL SOFT COIL LENGTHS, 50 FT COILS.....	FT
BULK	PAFZZ	4710-00-203-3172	81348	WWT775	TUBE, COPPER .375 OD X .032 WALL SOFT COIL LENGTHS, 50 FT COILS.....	FT
BULK	PAFZZ	4710-00-424-2654	81348	WWT775	TUBE, COPPER .500 OD X .032 WALL SOFT COIL LENGTHS, 50 FT COILS.....	FT
BULK	PAFZZ	4710-00-277-4508	81348	WWT775	TUBE, COPPER .625 OD X .035 WALL SOFT COIL LENGTHS, 50 FT COILS.....	FT
BULK	PAFZZ	4710-00-170-7503	81348	WWT775	TUBE, COPPER .750 OD X .042 WALL STRAIGHT LENGTH.....	FT
BULK	PAFZZ	4710-00-277-4528	81348	WWT775	TUBE COPPER .875 OD X .045 WALL STRAIGHT LENGTH.....	FT
BULK	PAJZZ	5970-00-812-2969	81349	MIL-I-23053/5-CL -IX.125-ID	INSULATION, SLEEVING .125 ID HEAT-SHRINK POLYOLEFIN TUBING, STANDARD LENGTHS OR COILS.....	FT
BULK	PAJZZ	5970-00-954-1622	81349	MIL-I-23053/5-CL -IX.187-ID	INSULATION, SLEEVING .187 ID HEAT-SHRINK POLYOLEFIN TUBING, STANDARD LENGTHS OR COILS.....	FT
BULK	PAJZZ	5970-00-812-2967	81349	MIL-I-23053/5-CL -I X .50 ID	INSULATION, SLEEVING -.500 ID HEAT-SHRINK POLYOLEFIN TUBING..	FT
BULK	PAJZZ	6145-00-003-9527	81349	M5086/1-10-9	WIRE, ELECTRICAL 10 AWG, 600 VOLT, COPPER, COLOR WHITE ON REELS.	FT
BULK	PAJZZ	6145-00-578-7521	81349	M5086/1-12-9	WIRE, ELECTRICAL 12 AWG, 600 VOLT, COPPER, COLOR WHITE ON REELS.	FT
BULK	PAJZZ	6145-00-578-7516	81349	M5086/1-14-9	WIRE, ELECTRICAL 14 AWG, 600 VOLT, COPPER, COLOR WHITE ON REELS.	FT
BULK	PAJZZ	6145-00-578-7517	81349	M5086/1-16-9	WIRE, ELECTRICAL 16 AWG, 600 VOLT, COPPER, COLOR WHITE ON REELS.	FT
BULK	PAJZZ	6145-00-284-0657	81349	M5086/2-8-9	WIRE, ELECTRICAL 8 AWG, 600 VOLT, COPPER, COLOR WHITE ON REELS..	FT
BULK	PAJZZ	6145-00-578-7513	81349	M5086/2-10-9	WIRE, ELECTRICAL 10 AWG, 600 VOLT, COPPER, COLOR WHITE ON REELS.	FT
BULK	PAFZZ	5640-00-785-7888	81349	MIL-I-14511 .50 THK	INSULATION SHEET . 00 IN THICK X 56 IN W X 84 IN L.....	BM
BULK	PAFZZ		81349	MIL-B-22191-TYPE -III	BARRIER MATERIAL, 56 SQ FT PER POUND.....	LB
BULK	PAFZZ	9320-01-048-2937	81346	ASIM-01056-SBE42 CF2 .25 THK	RUBBER STRIP IN THICK X .375 W X 100 FT ROLLS.....	FT

SLK	P4322	1020-00-793-8995	81349	MIL-T-43435-TYPE -1-FIN-8 SIZE 3	TAPE, IMPREGNATED, LACING AND TYING, 500YD RL RL.....	RY
SECTION III. SPECIAL TOOLS LIST (Not Applicable)						

00-045-3296	6	24	5940-00-143-4774	8	11
00-045-3296	6	34	5940-00-143-4774	8	31
00-045-3296	9	2	5940-00-143-4774	8	38
00-045-3296	10	54	5940-00-143-4774	8	50
00-045-3296	10	69	5940-00-143-4774	8	61
00-045-3296	11	62	5940-00-143-4774	9	12
00-045-3296	11	71	5940-00-143-4774	9	17
00-045-3296	17	7	5940-00-143-4774	9	22
00-045-3296	18	2	5940-00-143-4774	9	27
00-045-3299	4	2	5940-00-143-4774	10	5
00-045-3299	5	2	5940-00-143-4774	10	17
00-045-3299	8	8	5940-00-143-4774	10	28
00-045-3299	10	59	5940-00-143-4774	10	31
00-045-3299	17	41	5940-00-143-4774	10	34
00-045-3299	19	72	5940-00-143-4774	16	7
00-045-3299	20	2	5940-00-143-4777	16	11
00-045-3299	20	6	5940-00-143-4780	10	22
00-045-4007	8	69	5940-00-143-4780	8	40
00-045-4007	16	14	5940-00-143-4780	8	51
00-045-4007	16	17	5940-00-143-4780	8	62
00-051-0211	BULK		5940-00-143-4780	10	10
00-055-7451	1	6	5940-00-143-4780	10	18
00-061-7325	3	37	5940-00-143-4780	11	2
00-061-7326	3	67	5940-00-143-4780	11	5
00-061-7326	3	71	5940-00-143-4780	11	8
00-061-7326	6	2	5940-00-143-4794	11	16
00-061-7326	6	28	5940-00-143-4794	10	11
00-061-7326	8	13	5940-00-143-4794	10	19
00-061-7326	10	67	5940-00-143-5284	14	5
00-061-7326	11	34	5340-00-158-4187	8	31
00-061-7326	11	50	4710-00-170-7903	18	37
00-061-7326	11	55	5355-00-171-2442	BULK	
00-061-7326	17	9	5325-00-171-6387	8	4
00-061-7326	17	21	5970-00-173-2385	11	51
00-061-7326	17	58	5305-00-175-3230	6	46
00-061-7326	18	4	5305-00-175-3230	3	52
00-061-7326	18	30	4730-00-189-2737	3	60
00-061-7326	18	36	5340-00-191-4898	17	16
00-061-7326	19	36	4130-00-193-8488	11	59
00-061-7326	19	46	5330-00-194-8387	3	23
00-061-7326	19	55	4710-00-203-3171	BULK	
00-061-7326	19	90	4710-00-203-3172	BULK	
00-063-3503	3	48	4730-00-203-4922	BULK	
00-063-7889	12	6	4730-00-203-4922	17	53
00-068-0505	20	46	4730-00-203-4922	18	10
00-073-8405	18	13	4730-00-203-4922	18	18
00-074-3301	11	58	8030-00-209-8005	BULK	
00-078-3615	8	14	5306-00-225-8497	13	13
00-079-7838	17	46	5306-00-225-9089	13	30
00-079-7838	19	77	5305-00-225-9091	15	3
00-081-4219	3	58	4730-00-228-0826	18	24
00-081-4219	13	15	5940-00-230-0515	6	18
00-081-4219	13	31	5940-00-230-0515	8	39
00-081-4219	15	5	5940-00-230-0515	10	21
00-081-8087	8	74	5940-00-230-0515	10	37
00-082-1404	8	70	5940-00-230-0515	10	40
00-082-1404	9	6	5940-00-230-0515	10	43
00-088-0551	16	4	5315-00-234-1856	5	6
00-088-0551	17	44	5930-00-236-2351	6	42
00-088-0551	19	75	5360-00-240-6526	5	7
00-105-8328	6	5	5340-00-251-8271	19	37
00-105-8328	11	35	5340-00-251-8286	19	56
00-106-0550	11	11	5340-00-253-5335	6	3
00-106-0551	6	4	6105-00-253-5520	13	16
00-106-0551	19	60	4730-00-254-6447	17	13
00-106-0552	19	47	4730-00-254-6449	18	16
00-106-0553	17	22	5935-00-260-3311	8	49
00-111-5200	17	38	4730-00-263-6465	19	65
00-114-1305	8	30	4730-00-263-6469	19	51
00-114-1305	12	36	4730-00-263-6469	19	63
00-116-1469	13	23	4730-00-263-6480	19	85
00-117-6828	19	38	4730-00-263-6482	19	93
00-117-6939	1	17	5305-00-267-8985	3	44
00-117-6939	3	34	5325-00-270-8890	17	23
00-117-6950	1	52	5930-00-275-7800	16	18
			5325-00-276-6100	18	14

5940-00-283-5280	10	16	5310-00-809-8544	14
6145-00-284-0657	BULK		5310-00-809-8544	17
5125-00-286-6047	6	36	5310-00-809-8544	20
5325-00-286-6047	16	19	5310-00-809-8544	23
5325-00-290-3976	1	53	5310-00-809-8544	3
5325-00-291-9366	17	55	5310-00-809-8544	6
5320-00-373-3984	9	34	5310-00-809-8544	8
5310-00-401-3365	19	3	5310-00-809-8544	9
4130-00-402-4497	5	5	5310-00-809-8544	17
5310-00-407-9566	13	14	5310-00-809-8544	11
5310-00-407-9566	15	4	5310-00-809-8544	11
5330-00-409-3350	17	37	5310-00-809-8544	11
6105-00-413-4448	15	8	5310-00-809-8544	13
5320-00-420-2165	18	20	5310-00-809-8544	17
4710-00-424-2694	BULK		5310-00-809-8544	17
5950-00-433-6017	8	73	5310-00-809-8544	17
2990-00-451-4838	8	5	5310-00-809-8544	17
4130-00-469-6758	7	1	5310-00-809-8544	18
5935-00-480-3752	11	37	5310-00-809-8544	18
5306-00-488-3826	3	38	5310-00-809-8544	18
4540-00-488-8617	14	12	5310-00-809-8544	19
5930-00-498-5895	14	7	5310-00-809-8544	19
4820-00-501-7089	19	34	5310-00-809-8544	19
5310-00-543-2410	10	2	5970-00-812-2967	BULK
5340-00-543-4394	6	35	5970-00-812-2969	BULK
5945-00-549-6348	10	63	4730-00-815-5674	19
5310-00-550-0284	10	47	4730-00-815-5686	19
5310-00-550-0284	10	51	5935-00-816-8644	12
5935-00-557-1438	12	13	4730-00-822-1277	19
5935-00-565-9497	8	41	5340-00-823-5322	9
5935-00-565-9497	12	16	5340-00-823-5322	11
5935-00-565-9497	12	27	5340-00-823-5322	11
5935-00-565-9503	12	26	5340-00-823-5322	11
4130-00-574-1916	18	32	5340-00-823-5322	12
5935-00-578-2742	12	5	5310-00-823-8804	8
6145-00-578-7513	BULK		5310-00-823-8804	11
6145-00-578-7516	BULK		5945-00-826-2218	10
6145-00-578-7517	BULK		5935-00-826-3956	11
6145-00-578-7521	BULK		5935-00-826-3956	12
5310-00-579-0079	8	75	5310-00-829-9981	19
5310-00-582-5965	12	32	6830-00-837-9927	BULK
5310-00-584-7800	6	25	5935-00-847-0568	19
4730-00-596-4062	17	18	5935-00-850-0546	8
4730-00-596-4062	19	87	5915-00-851-0366	9
5310-00-623-5989	1	19	5915-00-851-0366	9
5310-00-623-5989	3	35	5915-00-851-0366	9
5310-00-623-5991	1	18	5915-00-851-0366	9
5306-00-656-0358	8	1	7510-00-852-8179	BULK
5315-00-663-2329	3	56	5935-00-853-3133	11
5310-00-685-6855	3	49	5935-00-853-3133	12
5305-00-724-6799	3	54	5935-00-853-3320	6
5305-00-724-6799	3	62	5935-00-853-3320	11
5935-00-725-4638	11	25	5940-00-859-4475	6
5935-00-725-4638	12	23	5940-00-859-4475	6
5305-00-726-1241	13	17	5940-00-859-4475	8
5315-00-730-4572	13	8	5940-00-859-4475	9
5315-00-730-4577	15	2	5940-00-859-4475	9
4020-00-753-6555	BULK		5940-00-859-4475	9
5935-00-755-3493	12	15	5940-00-859-4475	9
4810-00-762-4463	17	48	5940-00-859-4475	10
4810-00-762-4463	19	79	5930-00-876-1634	6
5640-00-785-7888	BULK		5935-00-878-6787	8
5935-00-801-6615	17	45	5935-00-878-7588	12
5935-00-801-6615	19	76	5310-00-880-9344	1
5935-00-801-6616	13	18	5310-00-880-9344	8
5935-00-805-4991	11	13	5310-00-880-9344	14
5935-00-806-4588	15	10	5935-00-881-1532	11
5310-00-809-4058	3	40	5320-00-882-8385	18
5310-00-809-4058	12	33	5320-00-882-8388	1
5310-00-809-4058	13	6	5320-00-882-8388	1
5310-00-809-4058	20	47	5320-00-882-8388	1
5310-00-809-8544	1	2	5320-00-882-8388	1
5310-00-809-8544	1	8	5320-00-882-8388	1
5310-00-809-8544	2	2	5320-00-882-8388	4
5310-00-809-8544	2	8	5320-00-882-8388	4

1-00-889-2544	8	27	5305-00-984-6193	8	34
1-00-889-2544	8	58	5305-00-984-6193	8	46
1-00-889-2544	10	62	5305-00-984-6193	17	40
1-00-889-2544	10	64	5305-00-984-6193	19	71
1-00-889-2544	11	21	5305-00-984-6194	1	1
1-00-889-2544	11	31	5305-00-984-6194	3	1
1-00-889-2544	11	47	5305-00-984-6194	3	8
1-00-889-2544	12	4	5305-00-984-6194	3	26
1-00-889-2549	6	9	5305-00-984-6194	4	1
1-00-889-2549	6	38	5305-00-984-6194	4	9
1-00-889-2549	8	35	5305-00-984-6194	13	4
1-00-889-2549	8	47	5305-00-984-6194	14	1
1-00-889-2549	14	3	5305-00-984-6194	15	25
1-00-889-2549	17	28	5305-00-984-6194	17	27
1-00-889-2999	16	3	5305-00-984-6194	17	33
1-00-889-3000	1	61	5305-00-984-6194	20	1
1-00-889-3000	4	16	5305-00-984-6194	20	5
1-00-889-3000	4	19	5305-00-984-6195	1	7
1-00-889-3000	7	2	5305-00-984-6195	2	1
1-00-889-3000	8	26	5305-00-984-6195	2	7
1-00-889-3000	8	57	5305-00-984-6195	8	7
1-00-889-3000	11	20	5305-00-984-6197	10	58
1-00-889-3000	11	30	5305-00-984-6198	10	57
1-00-889-3000	11	45	5305-00-984-6210	3	18
1-00-889-3000	12	3	5305-00-984-6211	3	17
1-00-889-3000	16	1	5305-00-984-6221	6	11
1-00-889-3000	19	13	5305-00-984-7441	1	30
1-00-889-8677	11	44	4820-00-986-8082	18	8
1-00-898-2083	11	56	5305-00-989-7434	3	24
1-00-905-4268	17	17	5305-00-989-7434	6	1
1-00-905-4268	19	31	5305-00-989-7434	6	33
1-00-905-4268	19	42	5305-00-989-7434	10	68
1-00-909-3717	19	57	5305-00-989-7434	11	33
1-00-911-9095	16	15	5305-00-989-7434	11	60
1-00-913-1749	9	8	5305-00-989-7434	11	70
1-00-922-6515	17	12	5305-00-989-7435	3	65
1-00-926-5289	6	10	5305-00-989-7435	3	70
1-00-929-3506	11	57	5305-00-989-7435	8	3
1-00-929-7870	17	49	5305-00-989-7435	9	1
1-00-929-7870	19	80	5305-00-989-7435	11	10
1-00-932-0913	19	41	5305-00-989-7435	13	1
1-00-932-0970	18	7	5305-00-989-7435	14	33
1-00-932-1972	1	21	5305-00-989-7435	17	7
1-00-932-1972	1	37	5305-00-989-7435	17	50
1-00-932-1972	1	50	5305-00-989-7435	18	1
1-00-932-1972	1	64	5305-00-989-7435	18	26
1-00-932-1972	3	1	5305-00-989-7435	19	35
1-00-932-1972	3	13	5305-00-989-7435	19	81
1-00-932-1972	3	15	5305-00-989-7435	19	88
1-00-932-1972	4	7	5305-00-993-0190	10	1
1-00-932-1972	4	14	5305-00-993-1851	6	23
1-00-932-1972	6	44	5305-00-993-1851	10	66
1-00-932-1972	8	20	5305-00-993-2457	12	31
1-00-932-1972	17	5	5305-00-995-3444	10	53
1-00-934-9747	19	15	5305-00-995-3444	11	48
1-00-934-9751	6	26	5305-00-995-3444	17	19
1-00-938-0974	5	4	5305-00-995-3444	17	56
1-00-938-2083	13	25	5305-00-995-3444	18	28
1-00-939-5442	10	49	5305-00-995-3444	18	34
1-00-947-8176	11	24	5305-00-995-3444	19	45
1-00-951-9777	11	64	5305-00-995-3444	19	53
1-00-954-1622	BULK		5305-00-995-3444	19	58
1-00-957-1422	3	28	4730-01-037-4919	19	44
1-00-957-1422	3	30	8030-01-040-8949	BULK	
1-00-957-7086	11	53	5340-01-041-9514	11	43
1-00-957-7811	8	11	5340-01-046-5888	11	69
1-00-958-5451	10	46	9320-01-048-2937	BULK	
1-00-958-5451	10	50	4820-01-053-5372	19	67
1-00-959-5237	8	18	9905-01-055-0219	4	15
1-00-983-8483	11	46	5310-01-058-3352	3	21
1-00-984-4979	17	43	5310-01-058-3352	9	33
1-00-984-4979	19	74	5310-01-064-3615	3	20
1-00-984-4984	8	68	5305-01-082-2739	13	10
1-00-984-4984	16	13	5305-01-082-2739	13	12

935-01-095-6390	1	47	5305-01-099-1414	14	27
935-01-095-6413	11	23	5305-01-099-3149	13	15
935-01-095-6414	12	9	5925-01-100-0970	8	18
935-01-095-8434	11	38			72

SC4	PART NUMBER	FIGURE ITEM		FSCN	PART NUMBER	FIGURE ITEM	
		NO.	NO.			NO.	NO.
7737	4043H	1	39	96906	MS21045-06	6	12
7707	4043H	1	41	96906	MS21045-06	7	3
7707	4043H	1	43	96906	MS21045-06	8	27
7707	4043H	1	45	96906	MS21045-06	8	58
7707	4043H	4	10	96906	MS21045-06	10	62
7707	4043H	4	12	96906	MS21045-06	10	64
7707	4043H	9	37	96906	MS21045-06	11	21
7707	4043H	1	34	96906	MS21045-06	11	31
7707	4066H	18	19	96906	MS21045-06	11	47
7707	4K41H	9	34	96906	MS21045-06	12	4
7707	4K64H	18	20	96906	MS21045-08	6	9
352	AN3-4A	6	6	96906	MS21045-08	6	38
352	AN3-4A	17	1	96906	MS21045-08	8	35
352	AN3-6A	8	1	96906	MS21045-08	8	47
346	ASTM-01056-SBE42CF2	BULK		96906	MS21045-08	14	3
346	ASTM-01056-SBE42CF2 .25 THK	BULK		96906	MS21045-08	17	28
855	AT75JA171	19	9	96906	MS21045-3	3	67
578	A19AGE-9	6	39	96906	MS21045-3	3	71
338	A31547-1	3	23	96906	MS21045-3	6	2
338	A31547-2	5	4	96906	MS21045-3	6	28
625	A37693	8	5	96906	MS21045-3	8	13
348	BA-F-1421-TYPE22	BULK		96906	MS21045-3	10	67
625	A43310-1	8	4	96906	MS21045-3	11	34
625	A48701X48.00	8	15	96906	MS21045-3	11	50
462	C-164	18	32	96906	MS21045-3	11	54
855	CA422H-36-208-3	19	6	96906	MS21045-3	17	9
647	CWA1249	14	7	96906	MS21045-3	17	21
790	C1-14423	8	73	96906	MS21045-3	17	58
739	C1503-01	18	13	96906	MS21045-3	18	4
349	F098250V1-6-10A	10	45	96906	MS21045-3	18	30
355	HT32AZ 223	19	27	96906	MS21045-3	18	36
193	JA3-218-6	8	72	96906	MS21045-3	19	36
430	KAW5	10	49	96906	MS21045-3	19	46
255	LCL2A	19	67	96906	MS21045-3	19	55
355	LF33MM013	19	17	96906	MS21045-3	19	90
355	LF33MM016	19	18	96906	MS21045-4	3	37
355	LF33MM017	19	19	96906	MS21090-0412	13	17
349	MIL-A-46106TYPEI	BULK		96906	MS21090-0632	13	19
349	MIL-R-22191-TYPE-III	BULK		96906	MS21090-32	15	11
349	MIL-1-14511 .50 THK	BULK		96906	MS21090-352	13	23
349	MIL-1-23053/5-CL-1 X .50 ID	BULK		96906	MS21090-52	15	9
349	MIL-1-23053/5-CL-1-.125ID	16	8	96906	MS21090-52	15	13
349	MIL-1-23053/5-CL-1X.125-ID	BULK		96906	MS21090-52	15	17
349	MIL-1-23053/5-CL-1X.187-ID	BULK		96906	MS21104010	6	4
349	MIL-1-23053/5CLA-1-.125ID	8	53	96906	MS21104010	19	60
349	MIL-T-22085TYPEI	BULK		96906	MS21104011	19	37
349	MIL-T-43435-TYPE-1-FIA-B SIZE 3	BULK		96906	MS21104012	19	47
349	MIL-T-55164/3-TY39TB10	10	56	96906	MS21104014	17	22
448	MNM-A-1617-TYPE-II	BULK		96906	MS2110402	6	3
006	MS15795-708	6	25	96906	MS21104020	19	56
006	MS171499	3	56	96906	MS21104046	18	31
006	MS20066-146	13	8	96906	MS21104050	18	37
006	MS20066-147	15	2	96906	MS2110406	6	5
006	MS20426AD3-5	1	17	96906	MS2110406	11	35
006	MS20426AD3-5	3	34	96906	MS2110406	17	59
006	MS20426AD4-5	1	52	96906	MS2110408	11	11
006	MS20426AD4-7	3	32	96906	MS21266-2N	11	58
006	MS20470AD4-6	19	38	96906	MS21318-14	3	52
006	MS20605AD6W4	3	28	96906	MS21318-14	3	60
006	MS20605AD6W4	3	30	96906	MS21322-33	8	14
006	MS21044N04	16	4	96906	MS21322-38	11	56
006	MS21044N04	17	44	96906	MS21322-40	11	57
006	MS21044N04	19	75	96906	MS219190G6	6	35
006	MS21044N06	8	74	96906	MS24192D1	10	63
006	MS21045-06	1	62	96906	MS24193-01	10	65
006	MS21045-06	4	17	96906	MS24665-155	5	6
006	MS21045-06	4	20	96906	MS246935272	8	11

PART NUMBER	FIGURE ITEM		FSCM	PART NUMBER	FIGURE ITEM	
	NO.	NC.			NO.	NC.
MS246935273	11	53	96906	MS27183-8	11	49
MS24693550	3	48	96906	MS27183-8	11	61
MS25036-106	10	16	96906	MS27183-8	11	72
MS25036-108	8	40	96906	MS27183-8	13	2
MS25036-108	8	51	96906	MS27183-8	17	3
MS25036-108	8	62	96906	MS27183-8	17	8
MS25036-108	10	10	96906	MS27183-8	17	20
MS25036-108	10	18	96906	MS27183-8	17	57
MS25036-108	11	2	96906	MS27183-8	18	3
MS25036-108	11	5	96906	MS27183-8	18	29
MS25036-108	11	8	96906	MS27183-8	18	35
MS25036-108	11	16	96906	MS27183-8	19	54
MS25036-112	10	11	96906	MS27183-8	19	59
MS25036-112	10	19	96906	MS27183-8	19	89
MS25036-112	14	5	96906	MS27183-9	8	12
MS25036-115	8	31	96906	MS27183-9	11	54
MS25036-116	8	30	96906	MS3100R24-22P	11	65
MS25036-116	12	36	96906	MS3100R24-22P	12	8
MS25036-153	6	17	96906	MS3100R28-9S	11	75
MS25036-153	6	31	96906	MS3100R28-9S	12	14
MS25036-153	8	38	96906	MS3100R28-9SX	11	24
MS25036-153	8	50	96906	MS3100R28-9SZ	11	38
MS25036-153	8	61	96906	MS3102R-12S-3P	17	45
MS25036-153	9	12	96906	MS3102R-12S-3P	19	76
MS25036-153	9	17	96906	MS3102R-12S-3PY	16	6
MS25036-153	9	22	96906	MS3102R-14S-7P	13	18
MS25036-153	9	27	96906	MS3102R-16-10P	15	10
MS25036-153	10	5	96906	MS3102R-24-11P	19	16
MS25036-153	10	17	96906	MS3102R-24-22PX	8	29
MS25036-153	10	28	96906	MS3102R-28-9SW	8	60
MS25036-153	10	31	96906	MS3102R-36-14SX	8	49
MS25036-153	10	34	96906	MS3106A36-14PX	12	21
MS25036-153	16	7	96906	MS3106F36-14P	12	13
MS25036-153	16	11	96906	MS3106R12S-3S	12	23
MS25036-154	6	18	96906	MS3106R12S3SY	12	24
MS25036-154	8	39	96906	MS3106R136-3S	11	25
MS25036-154	10	21	96906	MS3106R14S7S	11	13
MS25036-154	10	37	96906	MS3106R16-10S	12	15
MS25036-154	10	40	96906	MS3106R24-11S	12	22
MS25036-154	10	43	96906	MS3106R24-22S	12	2
MS25036-157	10	22	96906	MS3106R24-22SX	12	9
MS25043-24D	12	5	96906	MS3106R28-9PW	11	37
MS25251-12	12	26	96906	MS3106R28-9PX	11	14
MS25251-16	8	63	96906	MS3106R28-9PZ	11	23
MS25251-16	11	15	96906	MS35190-239	10	46
MS25251-16	11	26	96906	MS35190-239	10	50
MS25251-16	11	39	96906	MS35206-214	10	1
MS25251-16	12	25	96906	MS35206-217	16	3
MS25251-8	8	41	96906	MS35206-222	17	43
MS25251-8	12	16	96906	MS35206-222	19	74
MS25251-8	12	27	96906	MS35206-227	8	68
MS27183-10	3	40	96906	MS35206-227	16	13
MS27183-10	12	33	96906	MS35206-227	16	16
MS27183-10	13	6	96906	MS35206-228	9	5
MS27183-10	20	47	96906	MS35206-230	1	61
MS27183-12	3	58	96906	MS35206-230	4	16
MS27183-12	13	15	96906	MS35206-230	4	19
MS27183-12	13	31	96906	MS35206-230	7	2
MS27183-12	15	5	96906	MS35206-230	8	24
MS27183-5	11	46	96906	MS35206-230	8	57
MS27183-6	8	70	96906	MS35206-230	11	20
MS27183-6	9	6	96906	MS35206-230	11	30
MS27183-7	1	2	96906	MS35206-230	11	45
MS27183-7	1	8	96906	MS35206-230	12	3
MS27183-7	2	2	96906	MS35206-230	16	1
MS27183-7	2	8	96906	MS35206-230	19	13
MS27183-7	3	4	96906	MS35206-234	6	11
MS27183-7	3	9	96906	MS35206-243	13	21
MS27183-7	4	3	96906	MS35206-245	5	1
MS27183-7	10	60	96906	MS35206-245	6	8
MS27183-7	13	5	96906	MS35206-245	6	37
MS27183-7	14	2	96906	MS35206-245	8	34
MS27183-7	17	34	96906	MS35206-245	8	46
MS27183-7	20	3	96906	MS35206-245	17	40
MS27183-7	20	7	96906	MS35206-245	19	71
MS27183-8	3	66	96906	MS35206-246	1	1
MS27183-8	6	27	96906	MS35206-246	3	3
MS27183-8	8	2	96906	MS35206-246	3	8
MS27183-8	9	3	96906	MS35206-246	3	26

FSCM	PART NUMBER	FIGURE ITEM		FSCM	PART NUMBER	FIGURE ITEM
		NO.	NO.			
96906	MS35206-246	4	5	96906	MS35489-1	1
96906	MS35206-246	13	4	96906	MS35489-11	1
96906	MS35206-246	14	1	96906	MS35489-14	1
96906	MS35206-246	15	25	96906	MS35489-17	1
96906	MS35206-246	17	27	96906	MS35489-22	1
96906	MS35206-246	17	33	96906	MS35489-51	1
96906	MS35206-246	20	1	96906	MS35493-6	1
96906	MS35206-246	20	5	96906	MS35649-2312	1
96906	MS35206-247	1	7	96906	MS35649-62	1
96906	MS35206-247	2	1	96906	MS35650-302	1
96906	MS35206-247	2	7	96906	MS35653-3252	1
96906	MS35206-247	8	7	96906	MS35790-9	1
96906	MS35206-249	10	58	96906	MS35872-2	1
96906	MS35206-250	10	57	96906	MS35872-4	1
96906	MS35206-263	3	18	96906	MS35917-4	1
96906	MS35206-264	3	17	96906	MS35917-7	1
96906	MS35206-52	15	15	96906	MS35919-22	1
96906	MS35207-263	3	24	96906	MS35920-3	1
96906	MS35207-263	6	1	96906	MS35921-3-2F	1
96906	MS35207-263	6	33	96906	MS35921-3	1
96906	MS35207-263	10	68	96906	MS35929-4	1
96906	MS35207-263	11	33	96906	MS51007-3	1
96906	MS35207-263	11	60	96906	MS51007-3	1
96906	MS35207-263	11	70	96906	MS51007-9	1
96906	MS35207-264	3	65	96906	MS51964-51	1
96906	MS35207-264	3	70	96906	MS51964-51	1
96906	MS35207-264	9	3	96906	MS90376-24R	1
96906	MS35207-264	9	1	96906	MS90376-24Y	1
96906	MS35207-264	11	10	96906	MS90376-28R	1
96906	MS35207-264	13	1	96906	MS90376-28Y	1
96906	MS35207-264	14	13	96906	MS90725-32	1
96906	MS35207-264	17	7	96906	MS90726-18	1
96906	MS35207-264	17	50	96906	MS90726-34	1
96906	MS35207-264	18	1	96906	MS90726-36	1
96906	MS35207-264	18	26	96906	MS90726-5	1
96906	MS35207-264	19	35	96906	MS90726-7	2
96906	MS35207-264	19	81	81349	M5086/1-10-9	BU
96906	MS35207-264	19	88	81349	M5086/1-12-9	BU
96906	MS35207-266	10	53	81349	M5086/1-14-9	BU
96906	MS35207-266	11	48	81349	M5086/1-16-9	BU
96906	MS35207-266	17	19	81349	M5086/2-10-9	BU
96906	MS35207-266	17	56	81349	M5086/2-8-9	BU
96906	MS35207-266	18	28	80205	NAS1031A08	
96906	MS35207-266	18	34	80205	NAS1031A3	
96906	MS35207-266	19	45	80205	NAS1031A3	
96906	MS35207-266	19	53	80205	NAS1297-4-4	
96906	MS35207-266	19	58	80205	NAS1329H3K180	
96906	MS35207-267	6	23	80205	NAS1329H3K80	
96906	MS35207-267	10	66	80205	NAS1329H3K80	
96906	MS35207-284	12	31	81349	PPP-8-20	
96906	MS35333-37	8	75	50831	P208A-22	
96906	MS35336-9	10	47	50831	P208A-72	
96906	MS35336-9	10	51	81348	QO-8-654-GR-III, IV, OR VI	BU
96906	MS35338-22	19	14	81348	QO-8-654-GR-IV OR VI	BU
96906	MS35338-40	10	2	81348	QO-5-571-TYPE-SN60WRAP2	BU
96906	MS35338-41	8	69	86797	RB-175	
96906	MS35338-41	16	14	78462	SA-K16	1
96906	MS35338-41	16	17	58849	SS-0257	
96906	MS35338-42	4	2	60120	STYLE-3-3502-18-36S	
96906	MS35338-42	5	2	70255	TCLB55HW90	1
96906	MS35338-42	8	8	81348	TF-5-1732	
96906	MS35338-42	10	59	81348	WMT775	BU
96906	MS35338-42	17	41	81348	WMT775	BU
96906	MS35338-42	19	72	81348	WMT775	BU
96906	MS35338-42	20	2	81348	WMT775	BU
96906	MS35338-42	20	6	81348	WMT775	BU
96906	MS35338-43	3	19	81348	WMT775	BU
96906	MS35338-43	6	24	41947	W1714	BU
96906	MS35338-43	6	34	41947	W1714	1
96906	MS35338-43	9	2	41947	W1714	1
96906	MS35338-43	10	54	41947	W1715	1
96906	MS35338-43	10	69	41947	W1725	1
96906	MS35338-43	11	62	41947	W4002	1
96906	MS35338-43	11	71	41947	W4002	1
96906	MS35338-43	17	2	41947	W4002	1
96906	MS35338-43	18	2	41947	W4009	1
96906	MS35338-44	12	32	41947	W4009	1
96906	MS35338-45	13	14	41947	W4018	1
96906	MS35338-45					

0-F-499- TYPE-A	BULK	97403	13214E3876	3	72
0R241	17	97403	13214E3877	3	66
0B241	19	97403	13214E3889	3	55
01-006189-003	15	97403	13214E3889	3	22
01-006189-012	13	97403	13214E390A	1	9
01-006424-008	13	97403	13214E3917	1	20
01-006424-012	15	97403	13214E3917-1	1	14
01-008773-014	13	97403	13214E3917-10	1	16
01-008773-040	15	97403	13214E3917-11	1	13
02-009242-001	15	97403	13214E3917-12	1	11
02-009312-000	13	97403	13214E3917-2	1	10
02-009315-001	13	97403	13214E3917-3	1	12
02-009922-000	15	97403	13214E3917-4	1	15
02-009923-000	15	97403	13214E3917-9	7	6
02-010999-20L	15	97403	13214E3922-1	2	13
02-010999-202	13	97403	13214E3929	2	9
02-010999-204	15	97403	13214E3931	2	10
02-011488-001	13	97403	13214E3931-2	2	11
02-011488-002	13	97403	13214E3931-3	2	12
02-011498-001	15	97403	13214E3931-4	2	12
02-011498-002	15	97403	13214E3932-1	19	1
12-11-203-12	8	97403	13214E3933	19	4
12-11-613-12	1	97403	13214E3934	4	4
12-11-703-12	14	97403	13214E3936	2	6
12-11014-12	1	97403	13214E3937	2	3
12-11014-12	8	97403	13214E3937-2	2	5
12-11014-12	14	97403	13214E3937-3	2	4
12-11014-12	11	97403	13214E3942	3	27
1218E9958-9	3	97403	13214E3942-1	3	36
12514	1	97403	13214E3942-2	3	33
13211E3363	1	97403	13214E3946	20	8
13211E3364	1	97403	13214E3946	20	4
13211E3465	BULK	97403	13214E3947	14	14
13211E378	10	97403	13214E3951	4	6
13211E3800	19	97403	13214E3952-1	18	21
13211F8165-1	19	97403	13214E3953	3	61
13211E8170	19	97403	13214E3954	3	53
13211E8178	20	97403	13214E3956	3	14
13211E8242	17	97403	13214E3957	4	9
13211E8255	17	97403	13214E3958	13	32
13211F8399C24-22S	11	97403	13214E3964	4	8
13211F8399C28-9P	6	97403	13214E3968	13	3
13211E8399C28-9P	11	97403	13214E3973	14	12
13211E8411	5	97403	13214E3981	5	5
13211E8412	5	97403	13214E3982	17	4
13214E0696-3	17	97403	13214E3983	13	7
13214E0696-3	19	97403	13214E3993	1	47
13214E3471-2	4	97403	13214E3994	1	51
13214E3471-2	7	97403	13214E3996	1	29
13214E3471-3	1	97403	13214E3997	1	60
13214E3471-3	4	97403	13214E3997-1	1	46
13214E3471-3	7	97403	13214E3997-17	1	47
13214E3744-14	1	97403	13214E3997-18	1	57
13214E3762	6	97403	13214E3997-19	1	35
13214E3789-2	1	97403	13214E3997-2	1	58
13214E3789-2	1	97403	13214E3997-20	1	59
13214E3789-2	1	97403	13214E3997-21	1	36
13214E3789-2	1	97403	13214E3997-22	1	54
13214E3789-2	3	97403	13214E3997-23	1	40
13214E3789-2	3	97403	13214E3997-3	1	

97403	13214E 401 9	8	32	97403	13216E4516-3
97403	13214E 4019/5	8	33	97403	13216E4516-4
97403	13214F 4019/6	8	32	97403	13216E4516/3
97403	13214E 4021	6	14	97403	13216E4516/3
97403	13214E 4021/3	6	19	97403	13216E4516/3
97403	13214F 4021/5	6	20	97403	13216E4516/3
97403	13214F 4021/6	6	21	97403	13216E4521
97403	13214E 4021/7	6	23	97403	13216E4522
97403	13214E 4022	12	12	97403	13216E4522/3
97403	13214E 4022-5	12	17	97403	13216E4523
97403	13214E 4022/7	12	18	97403	13216E4524
97403	13214F 4022/8	12	19	97403	13216E4528
97403	13214F 4023	8	36	97403	13216E4529
97403	13214E 4023/5	8	44	97403	13216E4530
97403	13214E 4023/6	8	45	97403	13216E4531
97403	13214F 4023/8	8	42	97403	13216E4535
97403	13214F 4023/9	8	43	97403	13216E4535
97403	13214E 4024	12	20	97403	13216F4536
97403	13214F 4026/10	12	29	97403	13216E4537
97403	13214F 4026/11	12	30	97403	13216E4539-1
97403	13214F 4026/8	12	28	97403	13216E4541
97403	13214E 4027	8	59	97403	13216E6201
97403	13214E 4027/2	8	64	97403	13216E8038-3
97403	13214F 4027/4	8	65	97403	13216E8038-5
97403	13214E 4027/5	8	66	97403	13216E8040
97403	13214E 4027/6	8	67	97403	13217E5402
97403	13214E 4028	18	38	97403	13217E5404
97403	13214E 4029	11	36	97403	13217E6791
97403	13214E 4029/5	11	40	97403	13217E6791/1
97403	13214F 4029/6	11	41	97403	13217E6791/11
97403	13214F 4029/7	11	42	97403	13217E6791/2
97403	13214E 4031	11	22	97403	13217E6792
97403	13214E 4031/5	11	27	97403	13217E6792/3
97403	13214E 4031/7	11	28	97403	13217E6792/8
97403	13214F 4031/8	11	29	97403	13217E6792/9
97403	13214E 4032	11	12	97403	13217E6793
97403	13214E 4032/5	11	17	97403	13217E6794
97403	13214E 4032/6	11	18	97403	13217E6797
97403	13214E 4032/7	11	19	97403	13217E6799-1
97403	13214E 4053	6	45	97403	13217E6799-1-1
97403	13214E 4054	6	41	97403	13217E6799-1-2
97403	13214E 4058	10	9	97403	13217E6799-1-3
97403	13214E 4058/3	10	13	97403	13217E6814
97403	13214E 4058/4	10	12	97403	13217E6820
97403	13214F 4058/5	10	14	97403	13217E6822
97403	13214E 4072-1	14	8	97403	13217E6824
97403	13214E 4072-1-1	14	11	97403	13217E6824/3
97403	13214E 4077	17	51	97403	13217E6824/5
97403	13214E 4078	17	29	97403	13217E6824/6
97403	13214E 4079	18	27	97403	13217E6825
97403	13214F 4081	18	5	97403	13217E6825/3
97403	13214E 4084	17	32	97403	13217E6825/4
97403	13214E 4084	19	68	97403	13217E6825/6
97403	13214E 4087	4	13	97403	13217E6825/7
97403	13214E4129	1	23	97403	13217E6826
97403	13214E4129-1	1	28	97403	13217E6827
97403	13214E4129-5	1	27	97403	13217E6830
97403	13214E 4224-3	19	73	97403	13217E6894
97403	13214E 4224-4	17	42	97403	13217E6896-106
97403	13214E 4266	1	38	97403	13217E6896-107
97403	13214E 4276-1	3	69	97403	13217E6896-136
97403	13214E 4316-2	14	4	97403	13217E6896-137
97403	13214E 4316/3	14	6	97403	13217E6896-138
97403	13214F 4328	1	22	97403	13217E6896-139
97403	13214E 4328	4	11	97403	13217E6896-140
97403	13214E 6499-7	1	24	97403	13217E6896-141
97403	13216E 4503	3	45	97403	13217E6896-142
97403	13216E 4504	3	59	97403	13217E6896-143
97403	13216E 4505	3	46	97403	13217E6896-144
97403	13216E 4506	3	51	97403	13217E6896-145
97403	13216E 4508	3	68	97403	13217E6896-146
97403	13216E 4510	3	31	97403	13217E6896-147
97403	13216E 4511	9	4	97403	13217E6896-148
97403	13216E 4512	9	30	97403	13217E6896-149
97403	13216E 4512-1	9	36	97403	13217E6896-150
97403	13216E 4512-2	9	31	97403	13217E6896-151
97403	13216E 4515	9	9	97403	13217E6896-152
97403	13216E 4515	9	32	97403	13217E6896-153
97403	13216E 4516-1	9	10	97403	13217E6896-154

13217E6896-167	20	38	97403	13218E9958-6	10	39
13217E6896-168	20	40	97403	13218E9958-7	10	42
13217E6896-169	20	41	97403	13218E9958-8	11	7
13217E6896-170	20	44	97403	13218E9958/1	12	37
13217E6896-171	20	43	97403	13218E9958/2	10	38
13217E6896-172	20	42	97403	13218E9958/2	10	41
13217E6896-174	20	35	97403	13218E9958/2	10	44
13217E6896-232	17	26	97403	13218E9958/2	11	3
13217E6896-289	20	25	97403	13218E9958/2	11	6
13217E6896/176	19	64	97403	13218E9958/3	6	32
13217E6896/178	19	69	97403	13218E9958/3	10	29
13217E6896/179	19	62	97403	13218E9958/3	10	32
13217E6896/180	18	39	97403	13218E9958/3	10	35
13217E6896/183	18	33	97403	13218E9958/3	16	12
13217E6896/191	19	66	97403	13218E9960	8	76
13217E6896/193	19	83	97403	13218E9961	8	16
13217E6896/194	19	61	97403	13218E9963	6	7
13217E6896/195	19	52	97403	13219E9958/2	11	9
13217E6896/198	19	50	97403	13225E8181	1	32
13217E6896/202	18	9	97403	13225E8559-1	3	39
13217E6896/204	18	11	02289	1600-S590-2	10	4
13217E6896/207	18	15	10855	2RA5049A	19	26
13217E6896/209	18	17	10855	2RG5241D	19	10
13217E6896/211	18	23	07652	244-16C	1	53
13217E6896/214	18	25	93781	3MP-23	17	49
13217E6896/215	17	52	93781	3MP-23	19	80
13217E6896/217	17	39	10855	3RG51638	19	25
13217E6896/218	17	15	00779	41532	6	16
13217E6896/220	17	54	00779	41532	6	30
13217E6896/221	17	60	00779	41532	8	52
13217E6896/222	19	48	00779	41532	9	11
13217E6896/230	19	70	00779	41532	9	16
13217E6896/236	17	31	00779	41532	9	21
13217E6896/241	17	25	00779	41532	9	26
13217E6896/250	17	11	00779	41532	10	20
13217E6896/255	17	61	64731	4715-28	13	16
13217E6896/256	19	92	56289	5JX100	9	13
13217E6896/258	19	43	56289	5JX100	9	18
13217E6896/259	19	86	56289	5JX100	9	23
13217E6896/297	19	40	56289	5JX100	9	28
13217E6896/298	17	14	58553	617A-454	19	34
13217E6896/302	19	28	10855	7RA5214A	19	24
13217E6896/304	19	84	10855	7RG51688	19	11
13217E6896/305	19	32	64731	7025-6	15	8
13217E6896/309	19	33	10855	76HC231-1033-23	19	7
13217E6896/310	10	26	10855	76HC231-1152-2	19	12
13217E6971/3	10	3	10855	76HC232-144-2	18	8
13218E7071-2	10	6	58553	802A-85	19	22
13218E7071/2	10	8	10855	99WAO351GC300510	19	23
13218E7071/4	10	7	10855	99WDO354TC200516	19	21
13218E7071/6	10	70	10855	99WMO351GC300410	19	21
13218E7072	8	10	10855	99WJO351GC300510	19	20
13218E9953						

Official:

E. C. MEYER
General, United States Army
Chief of Staff

ROBERT M. JOYCE
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:

To be distributed in accordance with DA Form 12-25C, Organizational Maintenance Requirements for Environmental Equipment Air Conditioners, 36,000 BTU, Floor Mount

★ U.S. GOVERNMENT PRINTING OFFICE: 1998 - 262-912/30035

PUBLICATION NUMBER	PUBLICATION DATE	PUBLICATION TITLE
TM 5-4120-363-24P	18 Dec 81	Air Conditioner, Compact, Vert 208 Volt, 3 Phase, 400 Hertz

BE EXACT. . . PIN-POINT WHERE IT IS				IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:
PAGE NO.	PARA- GRAPH	FIGURE NO.	TABLE NO.	
6	2-1 a			In line 6 of paragraph 2-1 a the manual states the engine has <u>6</u> Cylinders. The engine on my set only has <u>4</u> Cylinders. Change the manual to show <u>4</u> Cylinders.
B1		4-3		Callout 16 on figure 4-3 is pointing at a <u>bolt</u> . In key to figure 4-3, item 16 is called a <u>shim</u> - Please correct one or the other.
125	line 20			I ordered a gasket, item 19 on figure B-16 by NSN 2 910-00-762-3001. I got a gasket but it doesn't work. Supply says I got what I ordered, so the NSN is wrong. Please give me a good NSN.

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER
JOHN DOE, PFC (268) 317.7111

SIGN HERE: **JOHN DOE**
JOHN DOE

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS ARE OBSOLETE.
 GPO: 1981 O-311-1, 1 Nov 80

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT THIS RECOMMENDATION MAKE A CARBON COPY AND GIVE IT TO YOUR HEADQUARTERS

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

COMMANDER
U S ARMY SUPPORT AND AVIATION MATERIEL READINESS CO
ATTN: DRSTS-MPSD
4300 GOODFELLOW BOULEVARD
ST. LOUIS, MO 63120

OUT. FOLD IT AND DROP IT
IN THE MAIL!

DATE SENT

PUBLICATION NUMBER

TM 5-4120-363-24P

PUBLICATION DATE

18 Dec 81

PUBLICATION TITLE

Air Conditioner, Compact, 208
208 Volt, 3 Phase, 4 Wire.

BE EXACT. PIN-POINT WHERE IT IS

PAGE
NO

PARA-
GRAPH

FIGURE
NO

TABLE
NO

IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE

DA FORM 2028-2
1 JUL 79

PREVIOUS EDITIONS
ARE OBSOLETE.

DRSTS-M Overprint 2, 1 Nov 80.

PS--IF YOUR OUTFIT WANTS TO KNOW ABOUT
RECOMMENDATION MAKE A CARBON COPY OF
AND GIVE IT TO YOUR HEADQUARTERS

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

COMMANDER
U S ARMY SUPPORT AND AVIATION MATERIEL READINESS CO
ATTN: DRSTS-MPSD
4300 GOODFELLOW BOULEVARD
ST. LOUIS, MO 63120

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

COMMANDER
U S ARMY SUPPORT AND AVIATION MATERIEL READINESS COMMAND
ATTN: DRSTS-MPSD
4300 GOODFELLOW BOULEVARD
ST. LOUIS, MO 63120



THEN... JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM. CAREFULLY TEAR IT
OUT. FOLD IT AND DROP IT
IN THE MAIL!

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

TM 5-4120-363-24P

PUBLICATION DATE

18 Dec 81

PUBLICATION TITLE

Air Conditioner, Compact, Ver
208 Volt, 3 Phase, 400 Hertz

BE EXACT... PIN-POINT WHERE IT IS

PAGE
NO.

PARA-
GRAPH

FIGURE
NO.

TABLE
NO.

IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:

SIGN HERE:

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

COMMANDER
U S ARMY SUPPORT AND AVIATION MATERIEL READINESS COMMAND
ATTN: DRSTS-MPSD
4300 GOODFELLOW BOULEVARD
ST. LOUIS, MO 63120

Weights

1 centigram = 10 milligrams = .15 grain
1 decigram = 10 centigrams = 1.54 grains
1 gram = 10 decigrams = .035 ounce
1 dekagram = 10 grams = .35 ounce
1 hectogram = 10 dekagrams = 3.52 ounces
1 kilogram = 10 hectograms = 2.2 pounds
1 quintal = 100 kilograms = 220.46 pounds
1 metric ton = 10 quintals = 1.1 short tons

1 sq. centimeter = 100 sq. millimeters = .155 sq. in.
1 sq. decimeter = 100 sq. centimeters = 15.5 sq. in.
1 sq. meter (centare) = 100 sq. decimeters = 10.76 sq. in.
1 sq. dekameter (are) = 100 sq. meters = 1,076.4 sq. in.
1 sq. hectometer (hectare) = 100 sq. dekameters = 2.47 ac.
1 sq. kilometer = 100 sq. hectometers = .386 sq. mi.

Cubic Measure

1 cu. centimeter = 1000 cu. millimeters = .06 cu. in.
1 cu. decimeter = 1000 cu. centimeters = 61.02 cu. in.
1 cu. meter = 1000 cu. decimeters = 35.31 cu. feet

Approximate Conversion Factors

To change	To	Multiply by	To change	To
inches	centimeters	2.540	ounce-inches	newton-meters
feet	meters	.305	centimeters	inches
yards	meters	.914	meters	feet
miles	kilometers	1.609	meters	yards
square inches	square centimeters	6.451	kilometers	miles
square feet	square meters	.093	square centimeters	square inches
square yards	square meters	.836	square meters	square feet
square miles	square kilometers	2.590	square meters	square yards
acres	square hectometers	.405	square kilometers	square miles
cubic feet	cubic meters	.028	square hectometers	acres
cubic yards	cubic meters	.765	cubic meters	cubic feet
fluid ounces	milliliters	29.573	cubic meters	cubic yards
pints	liters	.473	milliliters	fluid ounces
quarts	liters	.946	liters	pints
gallons	liters	3.785	liters	quarts
ounces	grams	28.349	liters	gallons
pounds	kilograms	.454	grams	ounces
short tons	metric tons	.907	kilograms	pounds
pound-feet	newton-meters	1.356	metric tons	short tons
pound-inches	newton-meters	.11296		

Temperature (Exact)

°F	Fahrenheit temperature	5/9 (after subtracting 32)	Celsius temperature	°C
----	------------------------	----------------------------	---------------------	----